SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2900 III (Intel Xeon E5450, 3.00 GHz)

SPECfp®2006 = 23.1

SPECfp_base2006 = 19.5

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2008
Hardware Availability: Nov-2007
Software Availability: May-2008

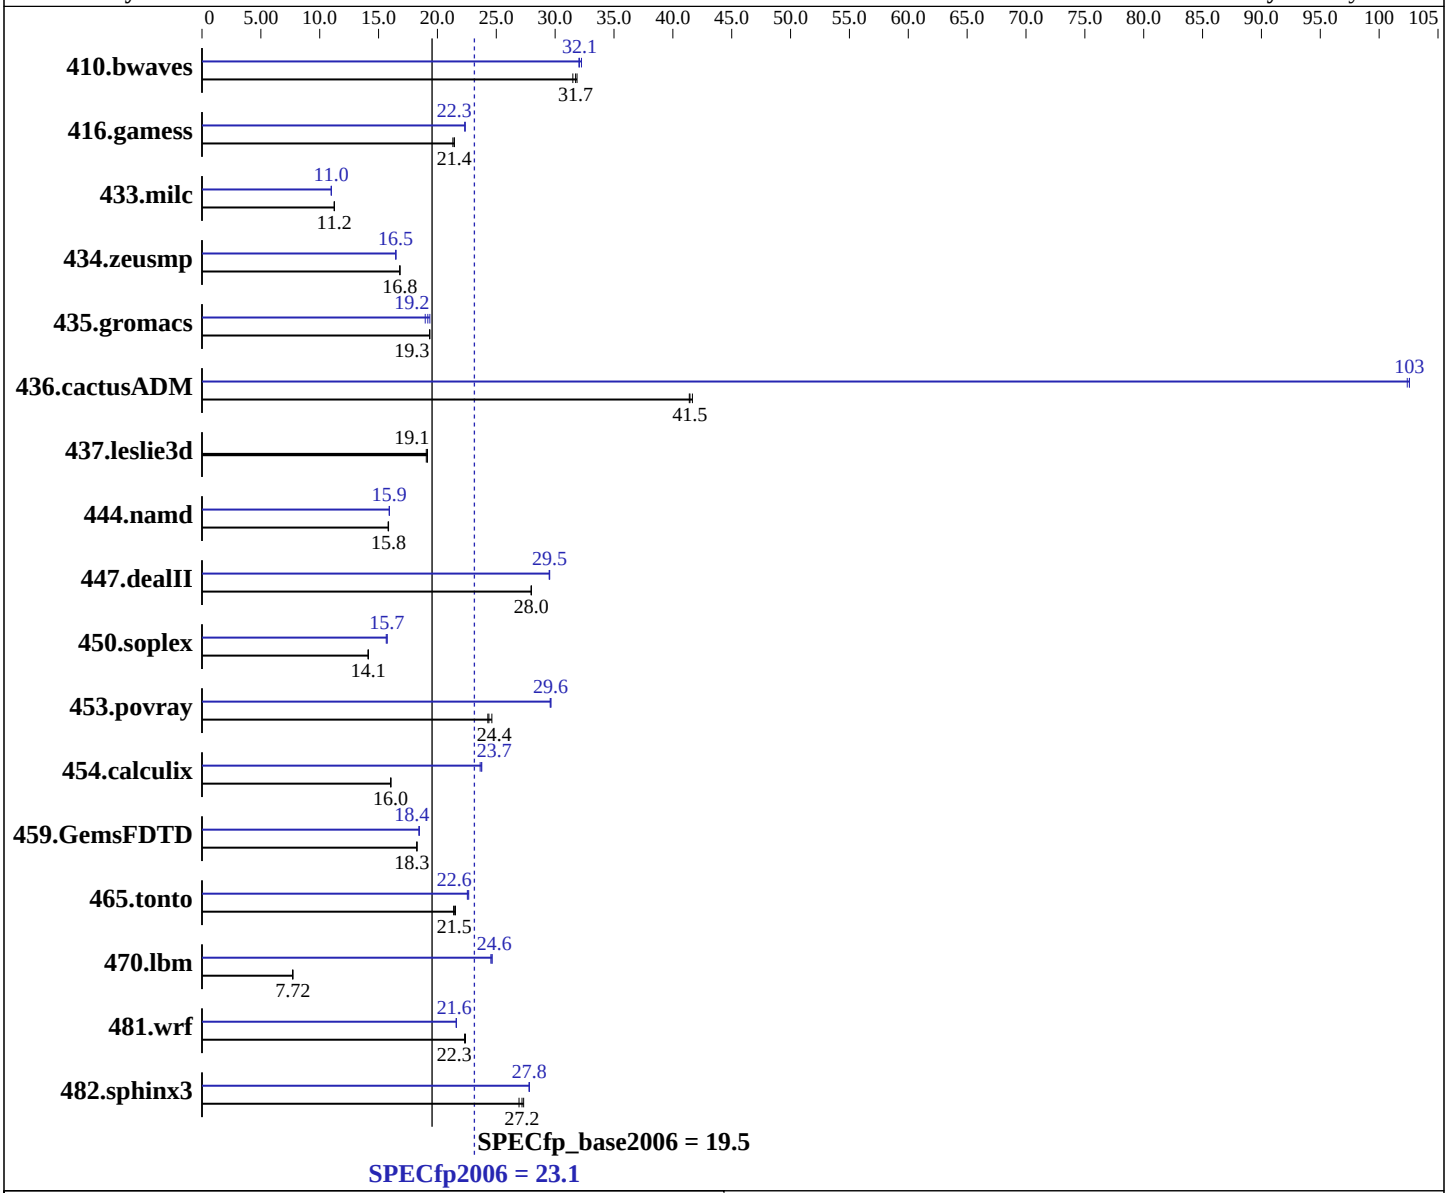

Hardware

CPU Name:	Intel Xeon E5450
CPU Characteristics:	
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2 Kernel 2.6.16-60.0.21-smp
Compiler:	Intel C++ and Fortran Compiler 10.1 for Linux Build 20080312 Package ID: l_cc_p_10.1.015, l_fc_p_10.1.015
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2900 III (Intel Xeon E5450, 3.00 GHz)

SPECfp2006 = 23.1

SPECfp_base2006 = 19.5

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2008
Hardware Availability: Nov-2007
Software Availability: May-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (8 x 2 GB, DDR2-667 MHz, CL5, Reg, Dual Rank)
Disk Subsystem: 2 x 73 GB GB SAS, 15000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	431	31.5	**428**	**31.7**	427	31.9	**424**	**32.1**	422	32.2	424	32.0
416.gamess	**914**	**21.4**	919	21.3	913	21.4	876	22.4	**876**	**22.3**	877	22.3
433.milc	817	11.2	**817**	**11.2**	816	11.3	835	11.0	**835**	**11.0**	836	11.0
434.zeusmp	**541**	**16.8**	541	16.8	541	16.8	553	16.5	**553**	**16.5**	552	16.5
435.gromacs	369	19.3	369	19.3	**369**	**19.3**	**372**	**19.2**	369	19.4	377	19.0
436.cactusADM	289	41.4	287	41.7	**288**	**41.5**	**117**	**103**	117	102	117	103
437.leslie3d	491	19.1	**491**	**19.1**	493	19.1	491	19.1	**491**	**19.1**	493	19.1
444.namd	507	15.8	**506**	**15.8**	506	15.8	504	15.9	504	15.9	**504**	**15.9**
447.dealII	**409**	**28.0**	409	28.0	409	28.0	**388**	**29.5**	387	29.5	388	29.5
450.soplex	590	14.1	**590**	**14.1**	591	14.1	**531**	**15.7**	533	15.7	530	15.7
453.povray	216	24.6	219	24.3	**218**	**24.4**	180	29.6	**180**	**29.6**	179	29.6
454.calculix	**515**	**16.0**	515	16.0	514	16.0	347	23.8	**348**	**23.7**	349	23.6
459.GemsFDTD	581	18.3	**581**	**18.3**	581	18.2	575	18.5	**575**	**18.4**	575	18.4
465.tonto	457	21.5	**458**	**21.5**	460	21.4	434	22.7	437	22.5	**436**	**22.6**
470.lbm	1780	7.72	**1781**	**7.72**	1786	7.69	**558**	**24.6**	560	24.5	558	24.6
481.wrf	499	22.4	501	22.3	**500**	**22.3**	517	21.6	517	21.6	**517**	**21.6**
482.sphinx3	713	27.3	**717**	**27.2**	724	26.9	701	27.8	701	27.8	**701**	**27.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
All benchmarks compiled in 64-bit mode except 450.soplex,
470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 200M
```

Base Compiler Invocation

C benchmarks:
icc

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast -parallel

C++ benchmarks:
-fast -parallel

Fortran benchmarks:
-fast -parallel

Benchmarks using both Fortran and C:
-fast -parallel

Peak Compiler Invocation

C benchmarks (except as noted below):
`/opt/intel/cc/10.1.015/bin/icc -L/opt/intel/cc/10.1.015/lib -I/opt/intel/cc/10.1.015/include`

433.milc: `icc`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/cc/10.1.015/bin/icpc -L/opt/intel/cc/10.1.015/lib -I/opt/intel/cc/10.1.015/include`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

470.lbm: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3`

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: `-fast -unroll2`

C++ benchmarks:

444.namd: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

447.dealII: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias -scalar-rep-`

450.soplex: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -opt-malloc-options=3`

453.povray: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-fast -prefetch -parallel`

416.gamess: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -prefetch -parallel`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -prefetch -parallel -auto-ilp32`

454.calculix: `-fast -unroll-aggressive -auto-ilp32`

481.wrf: `-fast -parallel -prefetch -auto-ilp32`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-fp-linux64-revD.20090713.html`
`http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.07.html`

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Intel-ic10.1-fp-linux64-revD.20090713.xml
http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.07.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 19:22:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 August 2008.