SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M600 (Intel Xeon E5430, 2.66 GHz)

SPECint®2006 = 24.2

SPECint_base2006 = 21.1

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2008
Hardware Availability: Jan-2008
Software Availability: May-2008

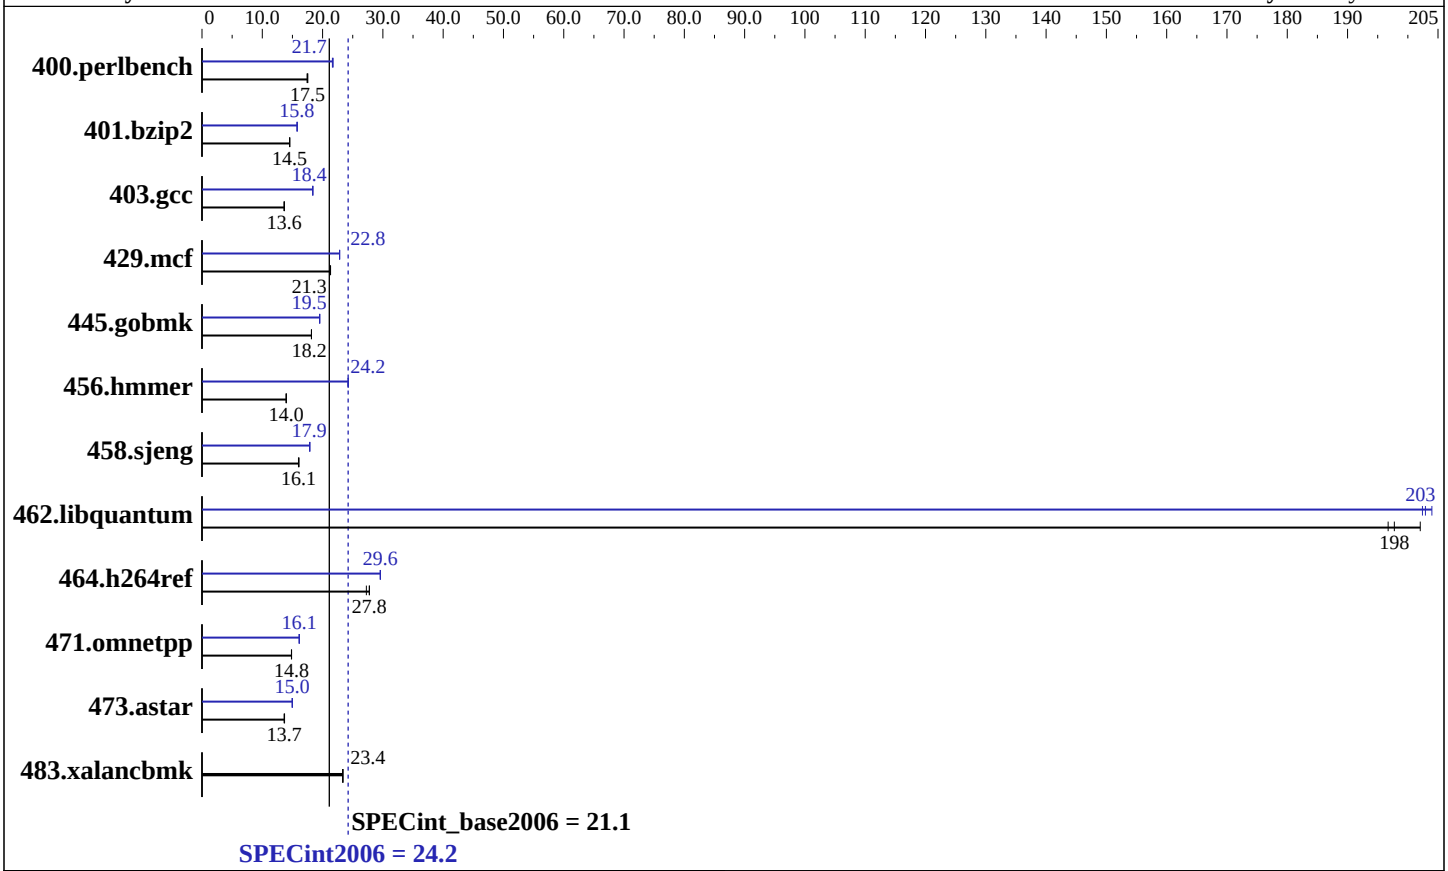

Hardware

CPU Name:	Intel Xeon E5430
CPU Characteristics:	
CPU MHz:	2666
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (4 x 4 GB 667 MHz ECC CL5 FB-DIMM)
Disk Subsystem:	1 x 80 GB 5400 RPM SATA
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16-60.0.21-smp
Compiler:	Intel C++ Compiler 10.1 for Linux Build 20080312 Package ID: l_cc_p_10.1.015
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M600 (Intel Xeon E5430, 2.66 GHz)

SPECint2006 = 24.2

SPECint_base2006 = 21.1

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2008
Hardware Availability: Jan-2008
Software Availability: May-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	561	17.4	**558**	**17.5**	557	17.5	**450**	**21.7**	452	21.6	450	21.7
401.bzip2	**664**	**14.5**	664	14.5	663	14.5	612	15.8	**612**	**15.8**	611	15.8
403.gcc	589	13.7	**590**	**13.6**	591	13.6	438	18.4	438	18.4	**438**	**18.4**
429.mcf	**428**	**21.3**	428	21.3	429	21.2	399	22.8	**400**	**22.8**	400	22.8
445.gobmk	**578**	**18.2**	578	18.2	578	18.2	**537**	**19.5**	537	19.5	537	19.5
456.hmmer	669	14.0	667	14.0	**667**	**14.0**	385	24.3	385	24.2	**385**	**24.2**
458.sjeng	756	16.0	**754**	**16.1**	753	16.1	**677**	**17.9**	678	17.8	676	17.9
462.libquantum	**105**	**198**	103	202	105	197	102	202	102	204	**102**	**203**
464.h264ref	**797**	**27.8**	812	27.3	797	27.8	748	29.6	**748**	**29.6**	748	29.6
471.omnetpp	**421**	**14.8**	421	14.9	421	14.8	387	16.1	**387**	**16.1**	388	16.1
473.astar	**514**	**13.7**	513	13.7	515	13.6	470	14.9	**468**	**15.0**	468	15.0
483.xalancbmk	295	23.4	296	23.3	**295**	**23.4**	295	23.4	296	23.3	**295**	**23.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
```
-fast -vec-guard-write -parallel -par-runtime-control
```

C++ benchmarks:
```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc
```

401.bzip2:
```
/opt/intel/cce/10.1.015/bin/icc
-L/opt/intel/cce/10.1.015/lib
-I/opt/intel/cce/10.1.015/include
```

456.hmmer:
```
/opt/intel/cce/10.1.015/bin/icc
-L/opt/intel/cce/10.1.015/lib
-I/opt/intel/cce/10.1.015/include
```

C++ benchmarks:
```
icpc
```

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

403.gcc: `-fast -inline-calloc -opt-malloc-options=3`

429.mcf: `-fast -prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-fast -unroll2 -ansi-alias -opt-multi-version-aggressive -auto-ilp32`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4`

462.libquantum: `-fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revD.20090713.00.html`
`http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.07.html`

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revD.20090713.00.xml
http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.07.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 19:15:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 September 2008.