



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 G5  
(3.33 GHz, Intel Xeon X5470)

**SPECfp®\_rate2006 = 83.4**

**SPECfp\_rate\_base2006 = 76.4**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Aug-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

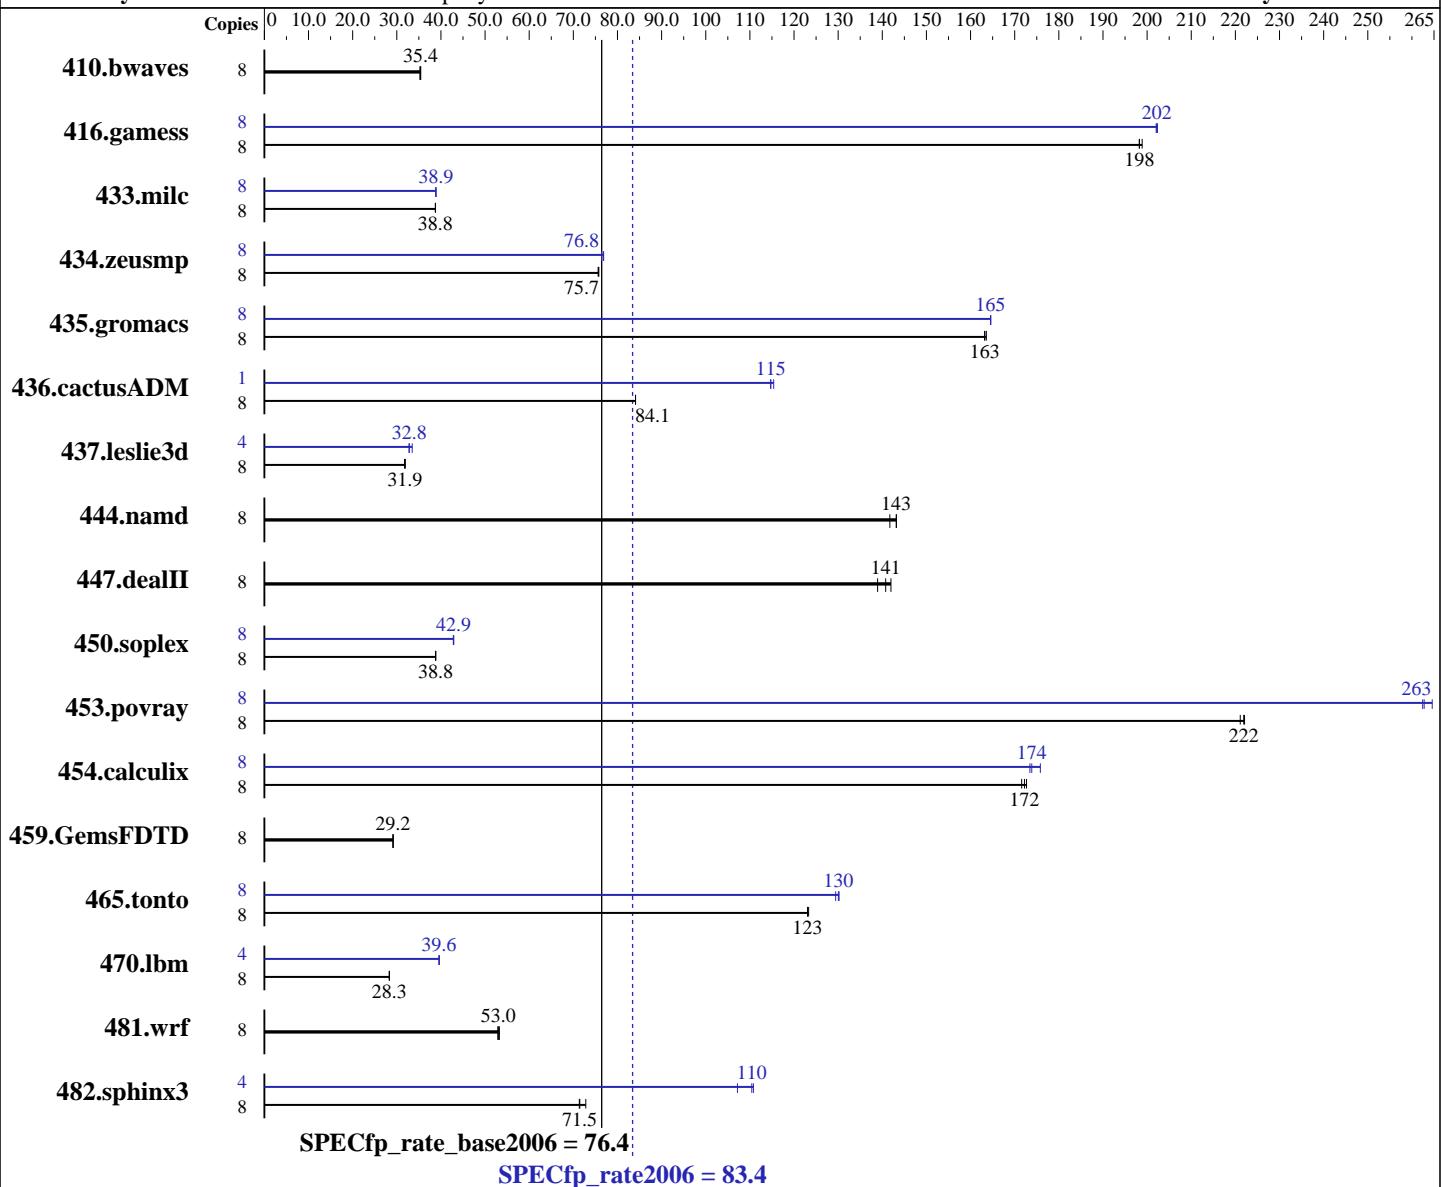

### Hardware

CPU Name: Intel Xeon X5470  
CPU Characteristics: 3.33 GHz, 2x6 MB L2 shared, 1333 MHz system bus  
CPU MHz: 3333  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l\_cproc\_b\_11.0.042, l\_fproc\_b\_11.0.042  
Auto Parallel: Yes  
File System: ext2  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 G5  
(3.33 GHz, Intel Xeon X5470)

**SPECfp\_rate2006 = 83.4**

**SPECfp\_rate\_base2006 = 76.4**

**CPU2006 license:** 3

**Test date:** Aug-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Nov-2008

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (8x2 GB PC2-5300F CL5)  
Disk Subsystem: 1x146 GB 10 K SAS  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	<b>3071</b>	<b>35.4</b>	3071	35.4	3086	35.2	8	<b>3071</b>	<b>35.4</b>	3071	35.4	3086	35.2
416.gamess	8	790	198	788	199	<b>790</b>	<b>198</b>	8	775	202	774	202	<b>775</b>	<b>202</b>
433.milc	8	1895	38.8	<b>1895</b>	<b>38.8</b>	1895	38.7	8	1890	38.9	1890	38.9	<b>1890</b>	<b>38.9</b>
434.zeusmp	8	961	75.8	<b>962</b>	<b>75.7</b>	963	75.6	8	947	76.9	953	76.4	<b>948</b>	<b>76.8</b>
435.gromacs	8	<b>350</b>	<b>163</b>	350	163	349	164	8	347	165	347	165	<b>347</b>	<b>165</b>
436.cactusADM	8	1137	84.1	1137	84.1	<b>1137</b>	<b>84.1</b>	1	104	115	<b>104</b>	<b>115</b>	104	115
437.leslie3d	8	2357	31.9	2367	31.8	<b>2360</b>	<b>31.9</b>	4	1123	33.5	<b>1145</b>	<b>32.8</b>	1147	32.8
444.namd	8	453	142	<b>448</b>	<b>143</b>	448	143	8	453	142	<b>448</b>	<b>143</b>	448	143
447.dealII	8	645	142	659	139	<b>650</b>	<b>141</b>	8	645	142	659	139	<b>650</b>	<b>141</b>
450.soplex	8	<b>1719</b>	<b>38.8</b>	1718	38.8	1721	38.8	8	<b>1556</b>	<b>42.9</b>	1555	42.9	1559	42.8
453.povray	8	192	221	<b>192</b>	<b>222</b>	192	222	8	161	265	162	262	<b>162</b>	<b>263</b>
454.calculix	8	<b>383</b>	<b>172</b>	382	173	385	172	8	375	176	381	173	<b>380</b>	<b>174</b>
459.GemsFDTD	8	2911	29.2	<b>2911</b>	<b>29.2</b>	2911	29.2	8	2911	29.2	<b>2911</b>	<b>29.2</b>	2911	29.2
465.tonto	8	<b>640</b>	<b>123</b>	640	123	638	123	8	608	129	605	130	<b>605</b>	<b>130</b>
470.lbm	8	3884	28.3	<b>3881</b>	<b>28.3</b>	3881	28.3	4	1388	39.6	1388	39.6	<b>1388</b>	<b>39.6</b>
481.wrf	8	1690	52.9	1678	53.2	<b>1685</b>	<b>53.0</b>	8	1690	52.9	1678	53.2	<b>1685</b>	<b>53.0</b>
482.sphinx3	8	2185	71.4	<b>2182</b>	<b>71.5</b>	2141	72.8	4	727	107	<b>706</b>	<b>110</b>	704	111

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
taskset was used to bind processes to cores except  
for 436.cactusADM peak

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to physical,0  
KMP\_STACKSIZE set to 64M



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 G5  
(3.33 GHz, Intel Xeon X5470)

**SPECfp\_rate2006 = 83.4**

**SPECfp\_rate\_base2006 = 76.4**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Aug-2008

**Hardware Availability:** Sep-2008

**Software Availability:** Nov-2008

## Platform Notes

BIOS configuration:

Power Regulator set to Static High Performance Mode

Adjacent Sector Prefetch Disabled

Hardware Prefetcher Disabled

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 G5  
(3.33 GHz, Intel Xeon X5470)

**SPECfp\_rate2006 = 83.4**

**SPECfp\_rate\_base2006 = 76.4**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Aug-2008

**Hardware Availability:** Sep-2008

**Software Availability:** Nov-2008

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc
    -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
    -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc
    -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
    -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /opt/intel/Compiler/11.0/042/bin/ia32/ifort
    -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
    -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 G5  
(3.33 GHz, Intel Xeon X5470)

**SPECfp\_rate2006 = 83.4**

**SPECfp\_rate\_base2006 = 76.4**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Aug-2008

**Hardware Availability:** Sep-2008

**Software Availability:** Nov-2008

## Peak Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -fno-alias

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch  
-auto-ilp32

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -Obo -ansi-alias  
-scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4 -auto

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 G5  
(3.33 GHz, Intel Xeon X5470)

**SPECfp\_rate2006 = 83.4**

**SPECfp\_rate\_base2006 = 76.4**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Aug-2008

**Hardware Availability:** Sep-2008

**Software Availability:** Nov-2008

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3  
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3  
-no-prec-div -static -unroll2 -opt-prefetch -parallel  
-auto-ilp32

454.calculix: -xsse4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.00.html>  
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.00.xml>  
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 19:42:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 September 2008.