



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECfp<sup>®</sup>2006 = 26.3**

ProLiant DL360 G5  
(3.33 GHz, Intel Xeon X5470)

**SPECfp\_base2006 = 25.1**

CPU2006 license: 3


Test date: Aug-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

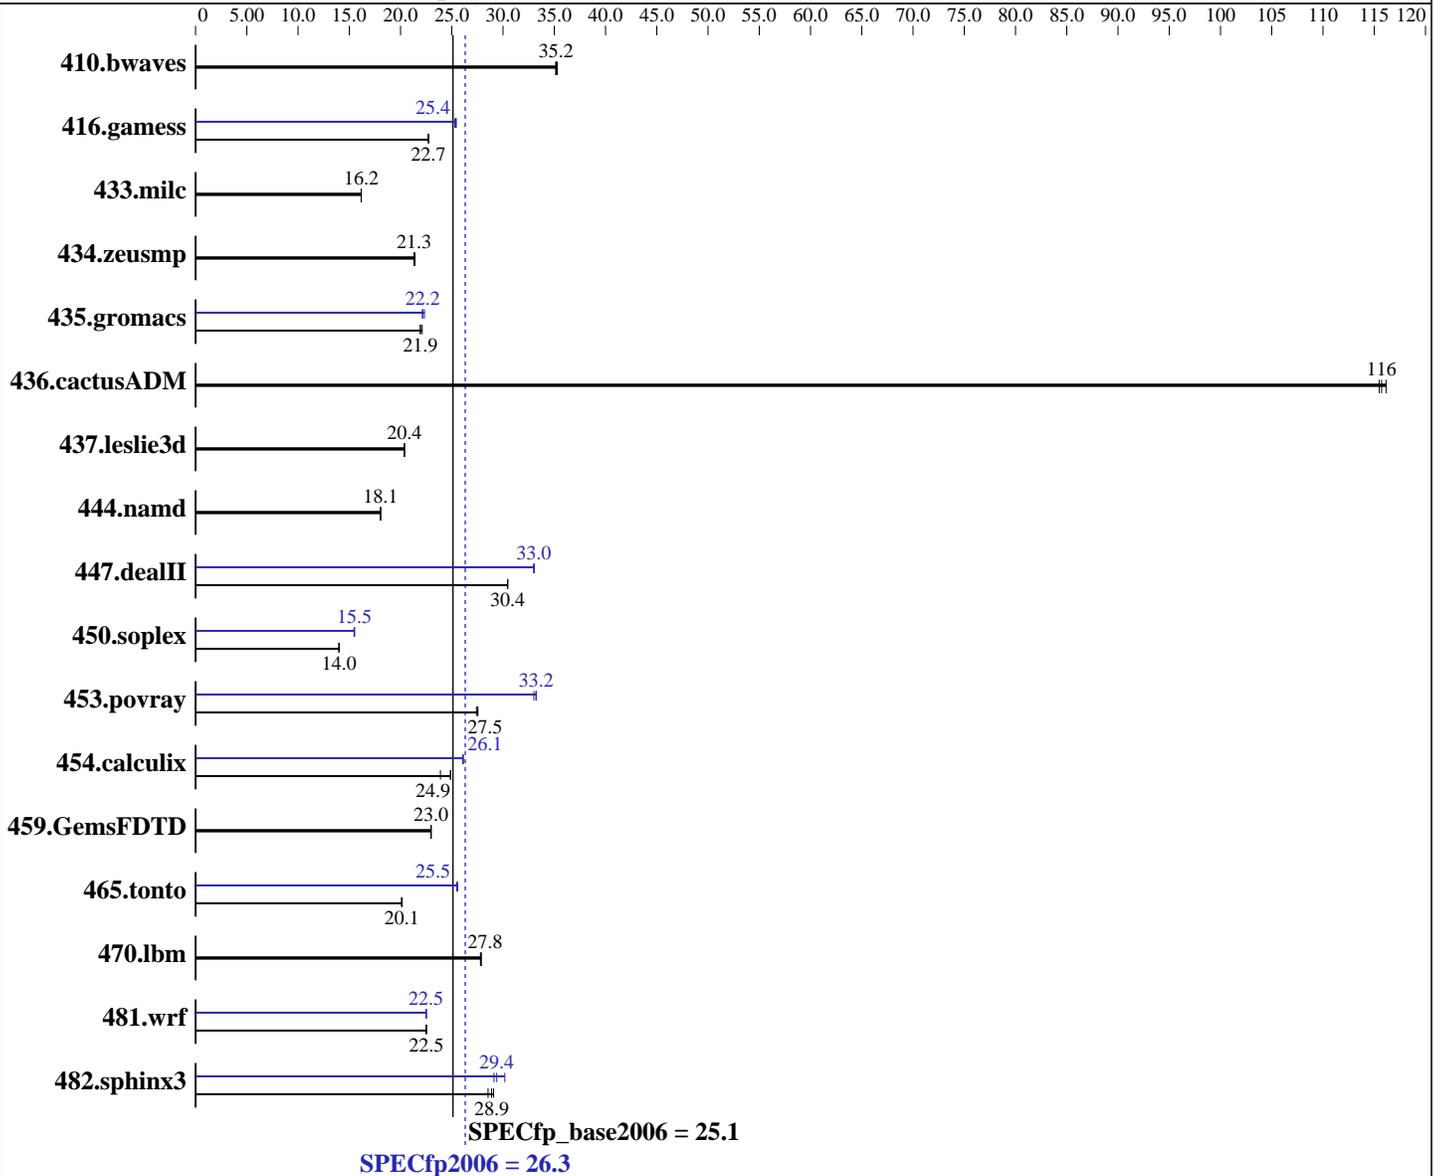

### Hardware

CPU Name: Intel Xeon X5470  
 CPU Characteristics: 3.33 GHz, 2x6 MB L2 shared, 1333 MHz system bus  
 CPU MHz: 3333  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smpp  
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l\_cproc\_b\_11.0.042, l\_fproc\_b\_11.0.042  
 Auto Parallel: Yes  
 File System: ext2  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp2006 = **26.3**

ProLiant DL360 G5  
(3.33 GHz, Intel Xeon X5470)

SPECfp\_base2006 = **25.1**

CPU2006 license: 3

Test date: Aug-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (8x2 GB PC2-5300F CL5)  
Disk Subsystem: 1x146 GB 10 K SAS  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	<b>386</b>	<b>35.2</b>	385	35.3	387	35.1	<b>386</b>	<b>35.2</b>	385	35.3	387	35.1
416.gamess	<b>862</b>	<b>22.7</b>	861	22.7	862	22.7	770	25.4	774	25.3	<b>771</b>	<b>25.4</b>
433.milc	<b>568</b>	<b>16.2</b>	568	16.2	568	16.2	<b>568</b>	<b>16.2</b>	568	16.2	568	16.2
434.zeusmp	<b>427</b>	<b>21.3</b>	427	21.3	425	21.4	<b>427</b>	<b>21.3</b>	427	21.3	425	21.4
435.gromacs	326	21.9	323	22.1	<b>325</b>	<b>21.9</b>	320	22.3	323	22.1	<b>322</b>	<b>22.2</b>
436.cactusADM	103	115	<b>103</b>	<b>116</b>	103	116	103	115	<b>103</b>	<b>116</b>	103	116
437.leslie3d	462	20.4	<b>461</b>	<b>20.4</b>	461	20.4	462	20.4	<b>461</b>	<b>20.4</b>	461	20.4
444.namd	444	18.1	445	18.0	<b>444</b>	<b>18.1</b>	444	18.1	445	18.0	<b>444</b>	<b>18.1</b>
447.dealII	<b>376</b>	<b>30.4</b>	376	30.4	376	30.5	346	33.1	347	33.0	<b>347</b>	<b>33.0</b>
450.soplex	596	14.0	<b>596</b>	<b>14.0</b>	596	14.0	<b>538</b>	<b>15.5</b>	538	15.5	539	15.5
453.povray	193	27.5	194	27.4	<b>193</b>	<b>27.5</b>	161	33.0	<b>160</b>	<b>33.2</b>	160	33.2
454.calculix	345	23.9	<b>332</b>	<b>24.9</b>	332	24.9	316	26.1	317	26.1	<b>316</b>	<b>26.1</b>
459.GemsFDTD	462	23.0	462	23.0	<b>462</b>	<b>23.0</b>	462	23.0	462	23.0	<b>462</b>	<b>23.0</b>
465.tonto	488	20.2	<b>489</b>	<b>20.1</b>	490	20.1	385	25.6	<b>386</b>	<b>25.5</b>	386	25.5
470.lbm	494	27.8	<b>494</b>	<b>27.8</b>	493	27.9	494	27.8	<b>494</b>	<b>27.8</b>	493	27.9
481.wrf	497	22.5	496	22.5	<b>496</b>	<b>22.5</b>	497	22.5	<b>496</b>	<b>22.5</b>	496	22.5
482.sphinx3	<b>675</b>	<b>28.9</b>	670	29.1	683	28.5	646	30.2	<b>663</b>	<b>29.4</b>	669	29.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to physical,0  
KMP\_STACKSIZE set to 200M

## Platform Notes

BIOS configuration:  
Power Regulator set to Static High Performance Mode



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 26.3**

ProLiant DL360 G5  
(3.33 GHz, Intel Xeon X5470)

**SPECfp\_base2006 = 25.1**

**CPU2006 license:** 3

**Test date:** Aug-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Nov-2008

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -noFOR\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -noFOR\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -noFOR\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 G5  
(3.33 GHz, Intel Xeon X5470)

SPECfp2006 = 26.3

SPECfp\_base2006 = 25.1

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Aug-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc
             -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
             -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc
            -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
            -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 26.3**

ProLiant DL360 G5  
(3.33 GHz, Intel Xeon X5470)

**SPECfp\_base2006 = 25.1**

**CPU2006 license:** 3

**Test date:** Aug-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Nov-2008

## Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: basepeak = yes

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-  
-opt-prefetch

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -Ob0 -ansi-alias  
-scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.00.html>

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revD.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 G5  
(3.33 GHz, Intel Xeon X5470)

**SPECfp2006 = 26.3**

**SPECfp\_base2006 = 25.1**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Aug-2008

**Hardware Availability:** Sep-2008

**Software Availability:** Nov-2008

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.00.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 19:37:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 September 2008.