SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G5
(2.66 GHz, Intel Xeon X7460)

SPECfp®_rate2006 = 81.4

SPECfp_rate_base2006 = 73.9

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Sep-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

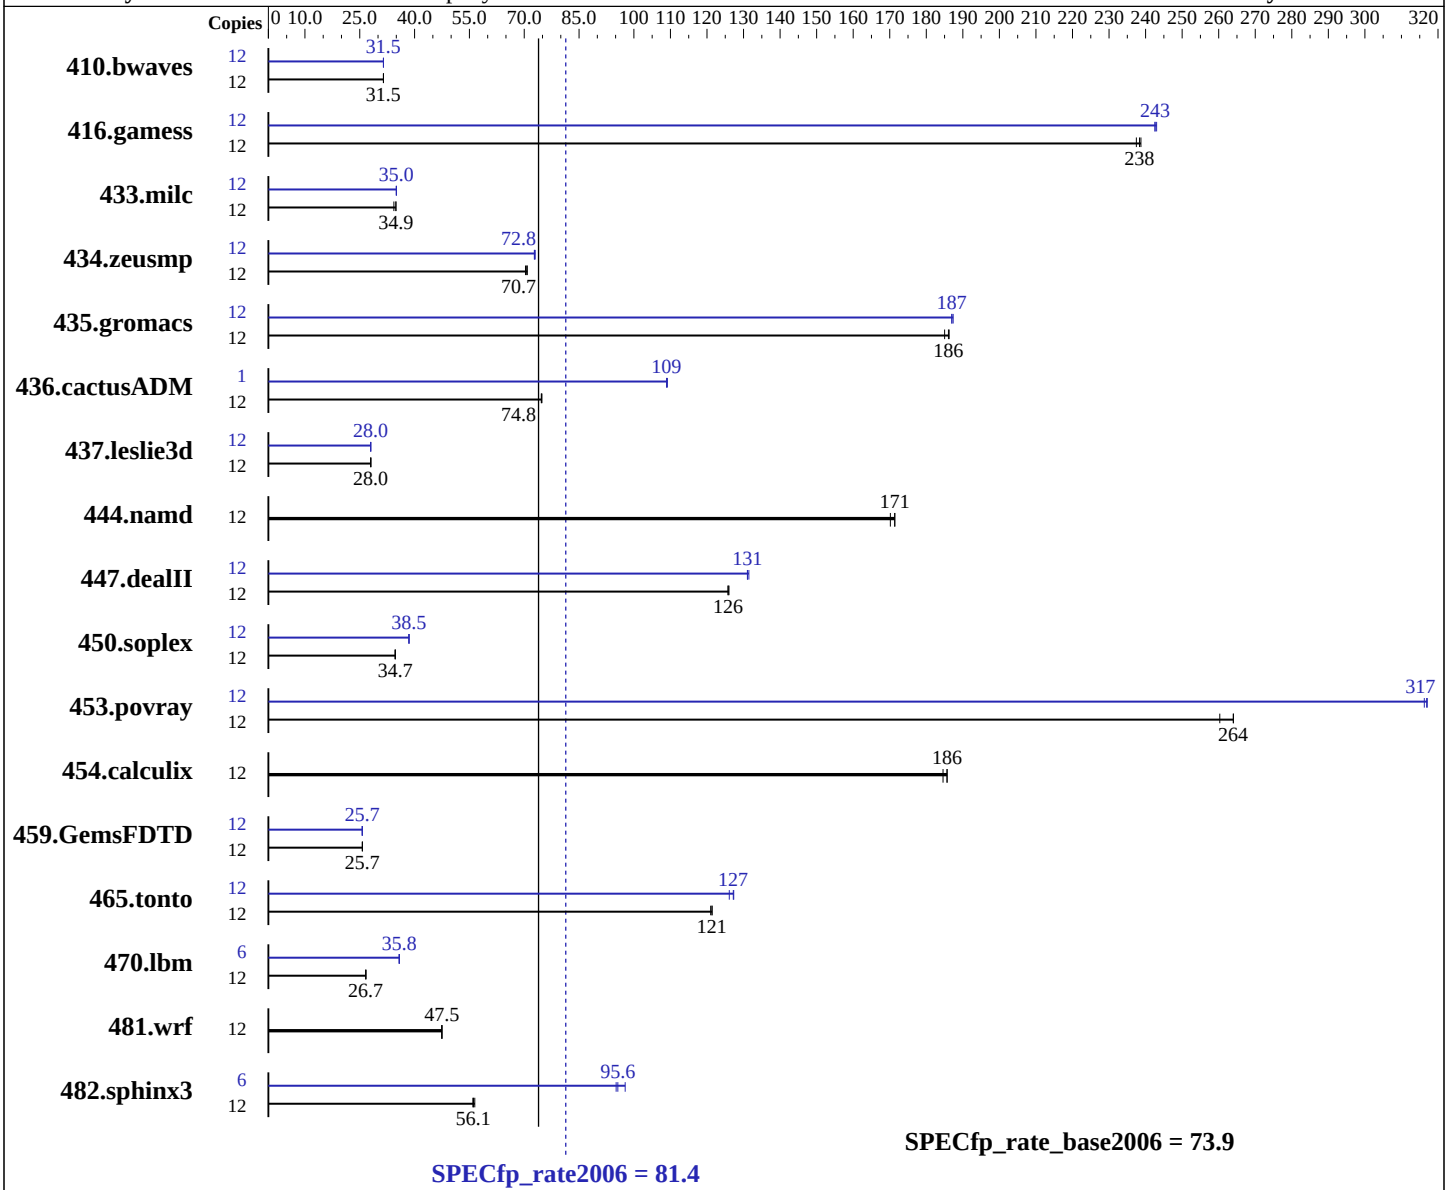

Hardware

CPU Name:	Intel Xeon X7460
CPU Characteristics:	2.66 GHz, 16 MB shared, 1333 MHz system bus
CPU MHz:	2667
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	9 MB I+D on chip per chip, 3 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042, l_fproc_b_11.0.042
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G5
(2.66 GHz, Intel Xeon X7460)

SPECfp_rate2006 = 81.4

SPECfp_rate_base2006 = 73.9

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Sep-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

L3 Cache: 16 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (16x4 GB PC2-5300F CL5)
Disk Subsystem: 1x146 GB 10 K SAS
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	5180	31.5	**5180**	**31.5**	5180	31.5	12	**5180**	**31.5**	5180	31.5	5179	31.5
416.gamess	12	989	237	984	239	**986**	**238**	12	969	243	**968**	**243**	967	243
433.milc	12	**3157**	**34.9**	3157	34.9	3208	34.3	12	**3146**	**35.0**	3146	35.0	3146	35.0
434.zeusmp	12	1542	70.8	1552	70.3	**1545**	**70.7**	12	**1499**	**72.8**	1501	72.8	1496	73.0
435.gromacs	12	**460**	**186**	460	186	463	185	12	**458**	**187**	457	187	458	187
436.cactusADM	12	1917	74.8	1921	74.7	**1918**	**74.8**	1	**110**	**109**	109	109	110	109
437.leslie3d	12	4025	28.0	**4026**	**28.0**	4028	28.0	12	4028	28.0	4029	28.0	**4029**	**28.0**
444.namd	12	566	170	562	171	**562**	**171**	12	566	170	562	171	**562**	**171**
447.dealII	12	**1091**	**126**	1092	126	1089	126	12	1047	131	1044	131	**1047**	**131**
450.soplex	12	2884	34.7	2883	34.7	**2883**	**34.7**	12	**2602**	**38.5**	2602	38.5	2600	38.5
453.povray	12	245	260	242	264	**242**	**264**	12	201	317	202	316	**201**	**317**
454.calculix	12	533	186	**533**	**186**	536	185	12	533	186	**533**	**186**	536	185
459.GemsFDTD	12	4952	25.7	**4950**	**25.7**	4949	25.7	12	4957	25.7	4955	25.7	**4956**	**25.7**
465.tonto	12	973	121	976	121	**973**	**121**	12	**928**	**127**	927	127	936	126
470.lbm	12	6185	26.7	**6184**	**26.7**	6184	26.7	6	2301	35.8	**2302**	**35.8**	2303	35.8
481.wrf	12	2825	47.4	**2824**	**47.5**	2823	47.5	12	2825	47.4	**2824**	**47.5**	2823	47.5
482.sphinx3	12	4142	56.5	**4168**	**56.1**	4180	55.9	6	1198	97.6	1229	95.1	**1223**	**95.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 taskset was used to bind processes to cores except
 for 436.cactusADM peak
 For peak modules using 1/2 the number of available cores, copies
 were each assigned to a single L2 cache using mysubmit.pl script.
 See the flags description file for mysubmit.pl details.
```

Operating System Notes

```
 'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to physical,0
 KMP_STACKSIZE set to 64M
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc
```

482.sphinx3: `/opt/intel/Compiler/11.0/042/bin/ia32/icc -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib -I/opt/intel/Compiler/11.0/042/ipp/ia32/include`

C++ benchmarks (except as noted below):
```
icpc
```

450.soplex: `/opt/intel/Compiler/11.0/042/bin/ia32/icpc -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib -I/opt/intel/Compiler/11.0/042/ipp/ia32/include`

Fortran benchmarks (except as noted below):
```
ifort
```

437.leslie3d: `/opt/intel/Compiler/11.0/042/bin/ia32/ifort -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib -I/opt/intel/Compiler/11.0/042/ipp/ia32/include`

Benchmarks using both Fortran and C:
```
icc ifort
```

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -fno-alias

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -opt-prefetch -parallel -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revD.20090713.html`
`http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revD.20090713.xml`
`http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:58:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 October 2008.