SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL480c
(3.33 GHz, Intel Xeon X5470)

SPECfp®2006 = 26.4

SPECfp_base2006 = 25.2

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

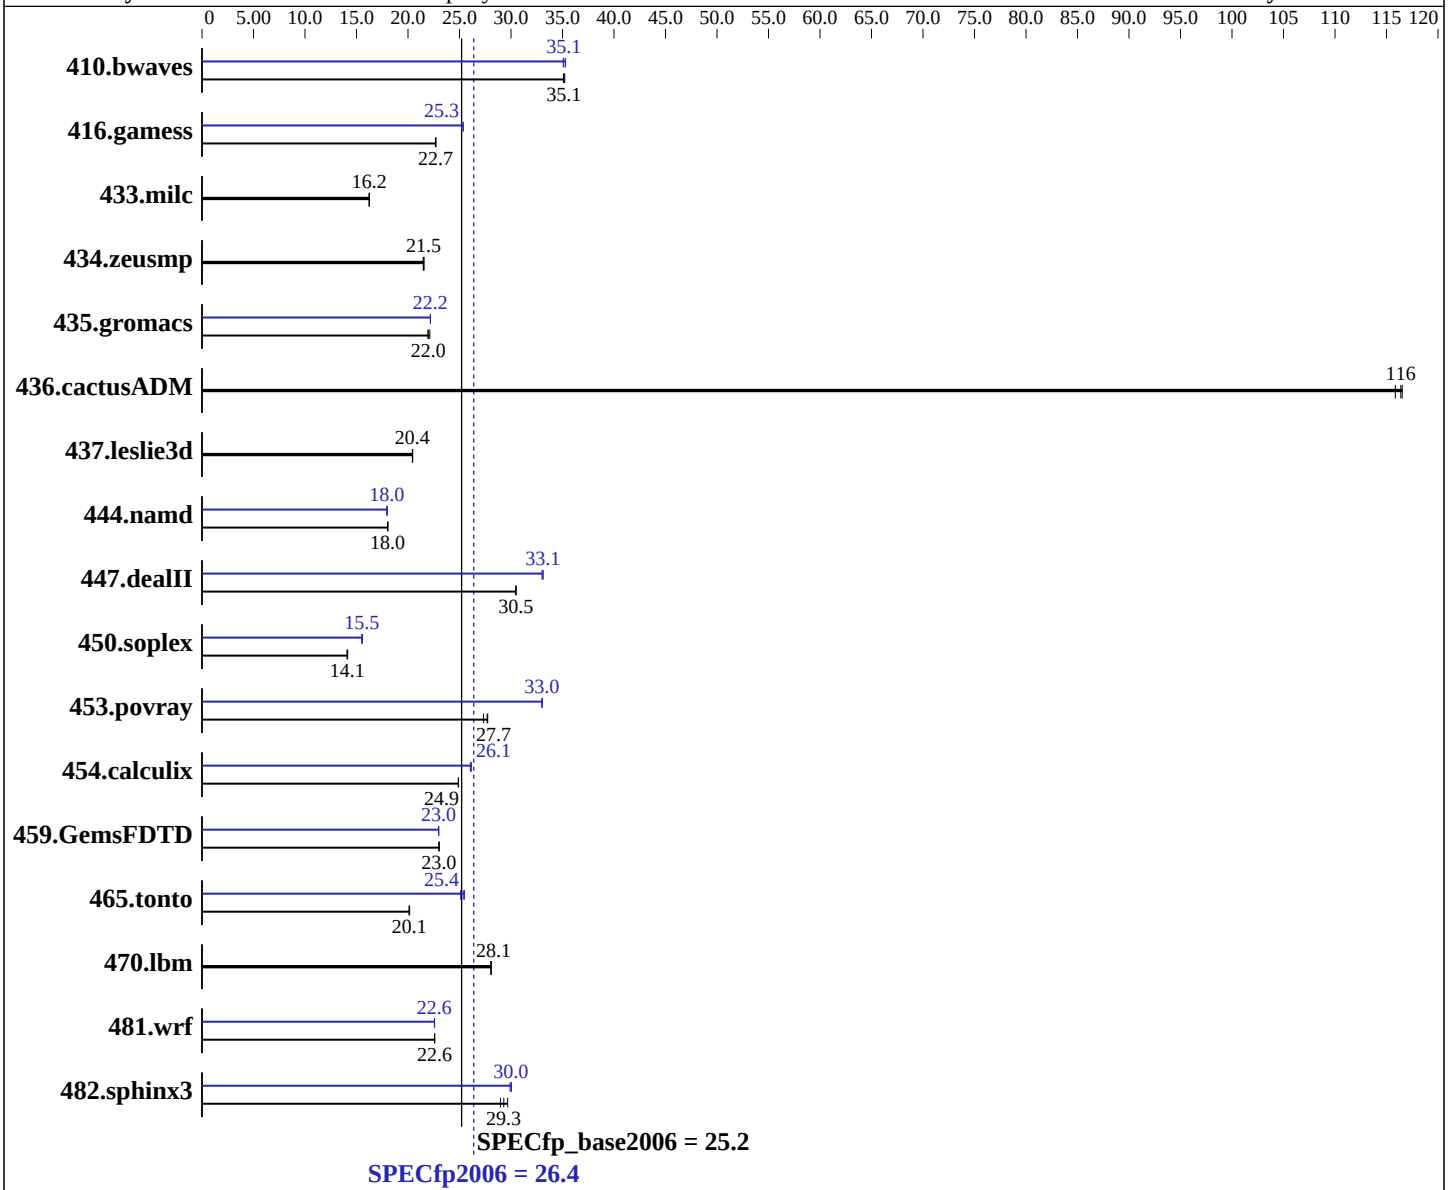

Hardware

CPU Name:	Intel Xeon X5470
CPU Characteristics:	3.33 GHz, 2x6 MB L2 shared, 1333 MHz system bus
CPU MHz:	3333
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042, l_fproc_b_11.0.042
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL480c
(3.33 GHz, Intel Xeon X5470)

SPECfp2006 = 26.4

SPECfp_base2006 = 25.2

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB PC2-5300F CL5)
Disk Subsystem: 1x146 GB 10 K SAS
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**387**	**35.1**	387	35.1	386	35.2	385	35.3	**387**	**35.1**	388	35.1
416.gamess	**863**	**22.7**	864	22.7	862	22.7	**772**	**25.3**	776	25.2	772	25.4
433.milc	566	16.2	565	16.2	**565**	**16.2**	566	16.2	565	16.2	**565**	**16.2**
434.zeusmp	422	21.6	**423**	**21.5**	424	21.5	422	21.6	**423**	**21.5**	424	21.5
435.gromacs	**325**	**22.0**	325	21.9	323	22.1	322	22.2	322	22.2	**322**	**22.2**
436.cactusADM	**103**	**116**	103	116	103	117	**103**	**116**	103	116	103	117
437.leslie3d	459	20.5	**460**	**20.4**	460	20.4	459	20.5	**460**	**20.4**	460	20.4
444.namd	**445**	**18.0**	445	18.0	445	18.0	447	18.0	446	18.0	**447**	**18.0**
447.dealII	**375**	**30.5**	375	30.5	375	30.5	**346**	**33.1**	346	33.1	347	33.0
450.soplex	590	14.1	592	14.1	**591**	**14.1**	535	15.6	538	15.5	**537**	**15.5**
453.povray	**192**	**27.7**	195	27.3	192	27.7	161	33.0	161	33.0	**161**	**33.0**
454.calculix	**331**	**24.9**	331	24.9	332	24.9	**316**	**26.1**	316	26.1	317	26.1
459.GemsFDTD	461	23.0	461	23.0	**461**	**23.0**	462	23.0	462	23.0	**462**	**23.0**
465.tonto	488	20.2	489	20.1	**489**	**20.1**	**388**	**25.4**	386	25.5	392	25.1
470.lbm	490	28.0	**490**	**28.1**	489	28.1	490	28.0	**490**	**28.1**	489	28.1
481.wrf	495	22.6	**495**	**22.6**	494	22.6	495	22.6	**495**	**22.6**	495	22.6
482.sphinx3	657	29.7	**665**	**29.3**	673	29.0	649	30.0	**650**	**30.0**	652	29.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

```
BIOS configuration:
  Power Regulator set to Static High Performance Mode
```

General Notes

```
All benchmarks compiled in 64-bit mode except 450.soplex,
and 482.sphinx3, at peak, are compiled in 32-bit mode
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 200M
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

C++ benchmarks (except as noted below):
icpc

450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -scalar-rep- -opt-prefetch

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revD.20090713.html
http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revD.20090713.xml
http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:52:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 October 2008.