SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2900 III (Intel Xeon E5420, 2.50 GHz)

SPECint®2006 = 23.9

SPECint_base2006 = 20.9

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Sep-2008
Hardware Availability: Nov-2007
Software Availability: Nov-2008

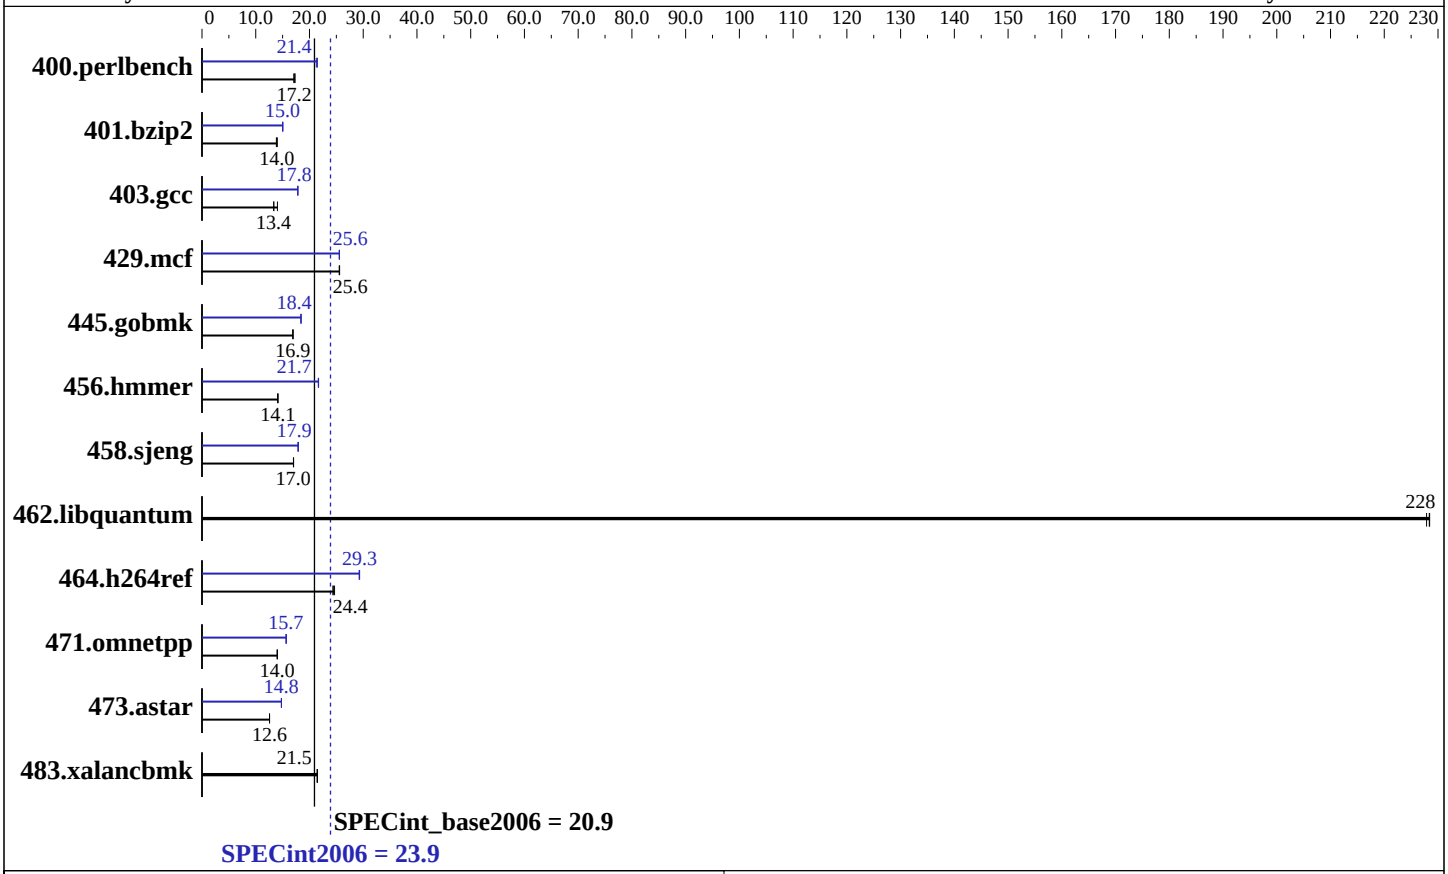

Hardware

CPU Name:	Intel Xeon E5420
CPU Characteristics:	
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2 GB 667 MHz CL5 DDR2 Dual Rank)
Disk Subsystem:	2 x 73 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16-60.0.21-smp
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2900 III (Intel Xeon E5420, 2.50 GHz)

SPECint2006 = 23.9

SPECint_base2006 = 20.9

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Sep-2008
Hardware Availability: Nov-2007
Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	564	17.3	572	17.1	**566**	**17.2**	459	21.3	**456**	**21.4**	456	21.4
401.bzip2	690	14.0	697	13.8	**691**	**14.0**	641	15.1	644	15.0	**642**	**15.0**
403.gcc	**603**	**13.4**	603	13.3	573	14.0	**451**	**17.8**	451	17.8	452	17.8
429.mcf	356	25.6	**357**	**25.6**	357	25.5	**357**	**25.6**	357	25.5	357	25.6
445.gobmk	**620**	**16.9**	620	16.9	620	16.9	569	18.4	570	18.4	**569**	**18.4**
456.hmmer	661	14.1	661	14.1	**661**	**14.1**	430	21.7	**430**	**21.7**	431	21.6
458.sjeng	**711**	**17.0**	711	17.0	710	17.0	677	17.9	**676**	**17.9**	675	17.9
462.libquantum	90.7	228	90.9	228	**90.7**	**228**	90.7	228	90.9	228	**90.7**	**228**
464.h264ref	908	24.4	897	24.7	**906**	**24.4**	755	29.3	**755**	**29.3**	757	29.2
471.omnetpp	445	14.0	447	14.0	**446**	**14.0**	399	15.7	399	15.7	**399**	**15.7**
473.astar	**559**	**12.6**	559	12.6	558	12.6	475	14.8	475	14.8	**475**	**14.8**
483.xalancbmk	**321**	**21.5**	321	21.5	322	21.4	**321**	**21.5**	321	21.5	322	21.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

General Notes

```
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
```
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch
```

C++ benchmarks:
```
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc
```

401.bzip2:
```
/opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include
```

456.hmmer:
```
/opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include
```

C++ benchmarks:
```
icpc
```

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3

429.mcf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.01.html
http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.10.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.01.xml
http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.10.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:34:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 October 2008.