SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2900 III (Intel Xeon X5470, 3.33 GHz)

SPECfp®_rate2006 = 81.7

SPECfp_rate_base2006 = 74.7

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Oct-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

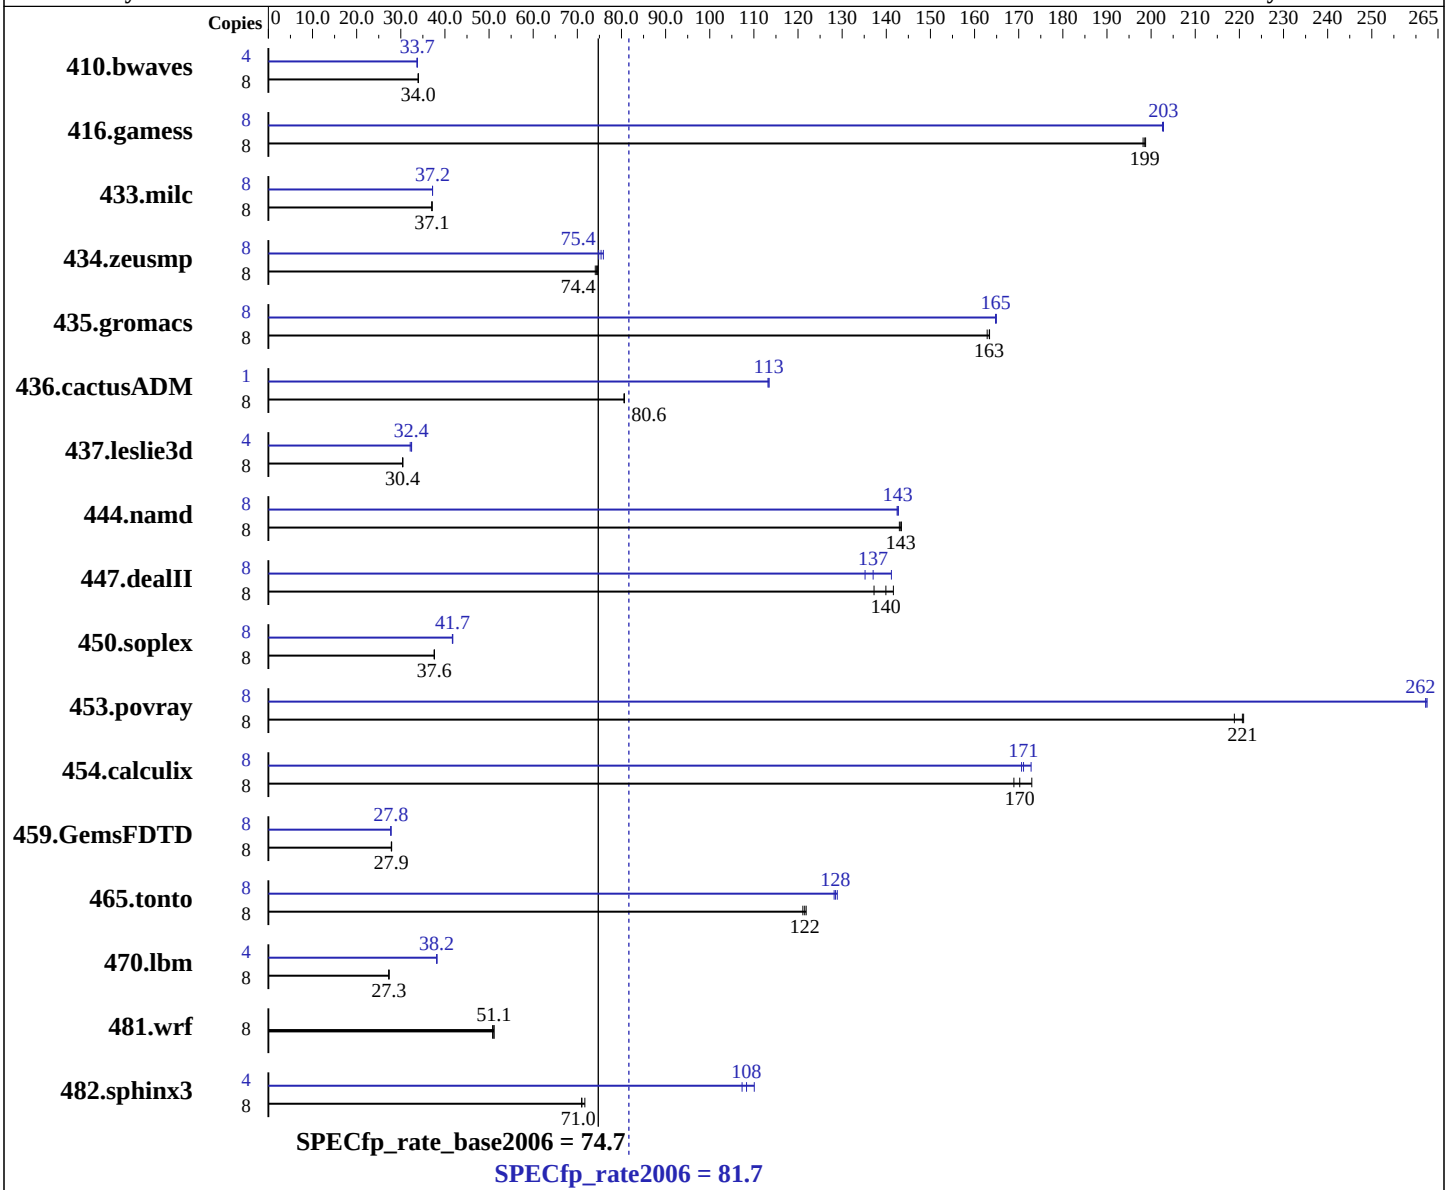

Hardware

CPU Name:	Intel Xeon X5470
CPU Characteristics:	
CPU MHz:	3333
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16-60.0.21-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042, l_fproc_b_11.0.042
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2900 III (Intel Xeon X5470, 3.33 GHz)

SPECfp_rate2006 = 81.7

SPECfp_rate_base2006 = 74.7

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Oct-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (8 x 2 GB DDR2-667)
Disk Subsystem: 2 x 73 GB 15000 RPM SAS
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3202	34.0	3200	34.0	**3201**	**34.0**	4	1614	33.7	**1611**	**33.7**	1610	33.8
416.gamess	8	788	199	790	198	**789**	**199**	8	772	203	**772**	**203**	773	203
433.milc	8	**1981**	**37.1**	1982	37.1	1981	37.1	8	**1975**	**37.2**	1974	37.2	1975	37.2
434.zeusmp	8	983	74.1	**979**	**74.4**	977	74.6	8	959	75.9	**966**	**75.4**	973	74.8
435.gromacs	8	351	163	350	163	**350**	**163**	8	**347**	**165**	347	165	346	165
436.cactusADM	8	1186	80.6	**1186**	**80.6**	1185	80.7	1	**105**	**113**	106	113	105	113
437.leslie3d	8	2469	30.5	**2470**	**30.4**	2474	30.4	4	1170	32.1	**1161**	**32.4**	1159	32.5
444.namd	8	**448**	**143**	447	143	449	143	8	**450**	**143**	450	142	449	143
447.dealII	8	**654**	**140**	646	142	667	137	8	648	141	**668**	**137**	677	135
450.soplex	8	1774	37.6	1775	37.6	**1774**	**37.6**	8	1600	41.7	1597	41.8	**1598**	**41.7**
453.povray	8	**193**	**221**	194	219	193	221	8	**162**	**262**	162	262	162	263
454.calculix	8	391	169	382	173	**388**	**170**	8	**386**	**171**	382	173	387	171
459.GemsFDTD	8	3038	27.9	**3043**	**27.9**	3047	27.9	8	3057	27.8	**3058**	**27.8**	3058	27.8
465.tonto	8	650	121	646	122	**648**	**122**	8	611	129	**613**	**128**	614	128
470.lbm	8	4026	27.3	**4025**	**27.3**	4023	27.3	4	1441	38.1	**1441**	**38.2**	1439	38.2
481.wrf	8	**1749**	**51.1**	1748	51.1	1759	50.8	8	**1749**	**51.1**	1748	51.1	1759	50.8
482.sphinx3	8	2197	71.0	**2196**	**71.0**	2174	71.7	4	726	107	**720**	**108**	708	110

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
```

Platform Notes

```
BIOS Settings:
Hardware Prefetcher = Disabled (Default = Enabled)
Adjacent Cache Line Prefetch = Disabled (Default = Enabled)
```

General Notes

```
taskset was used to bind processes to cores except
for 436.cactusADM peak
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

Fortran benchmarks:
`-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:
`-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

482.sphinx3: `/opt/intel/Compiler/11.0/042/bin/ia32/icc -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib -I/opt/intel/Compiler/11.0/042/ipp/ia32/include`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/Compiler/11.0/042/bin/ia32/icpc -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib -I/opt/intel/Compiler/11.0/042/ipp/ia32/include`

Fortran benchmarks (except as noted below):
`ifort`

437.leslie3d: `/opt/intel/Compiler/11.0/042/bin/ia32/ifort -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib -I/opt/intel/Compiler/11.0/042/ipp/ia32/include`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -fno-alias

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-malloc-options=3 -opt-prefetch

Continued on next page

Peak Optimization Flags (Continued)

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -opt-prefetch`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -opt-prefetch -parallel -auto-ilp32`

454.calculix: `-xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.05.html
http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.02.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.05.xml
http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.02.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:20:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 November 2008.