SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX200 S4, Intel Xeon L5430, 2.67 GHz

SPECint®_rate2006 = Not Run

SPECint_rate_base2006 = 123

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Oct-2008
Hardware Availability: Oct-2008
Software Availability: Nov-2008

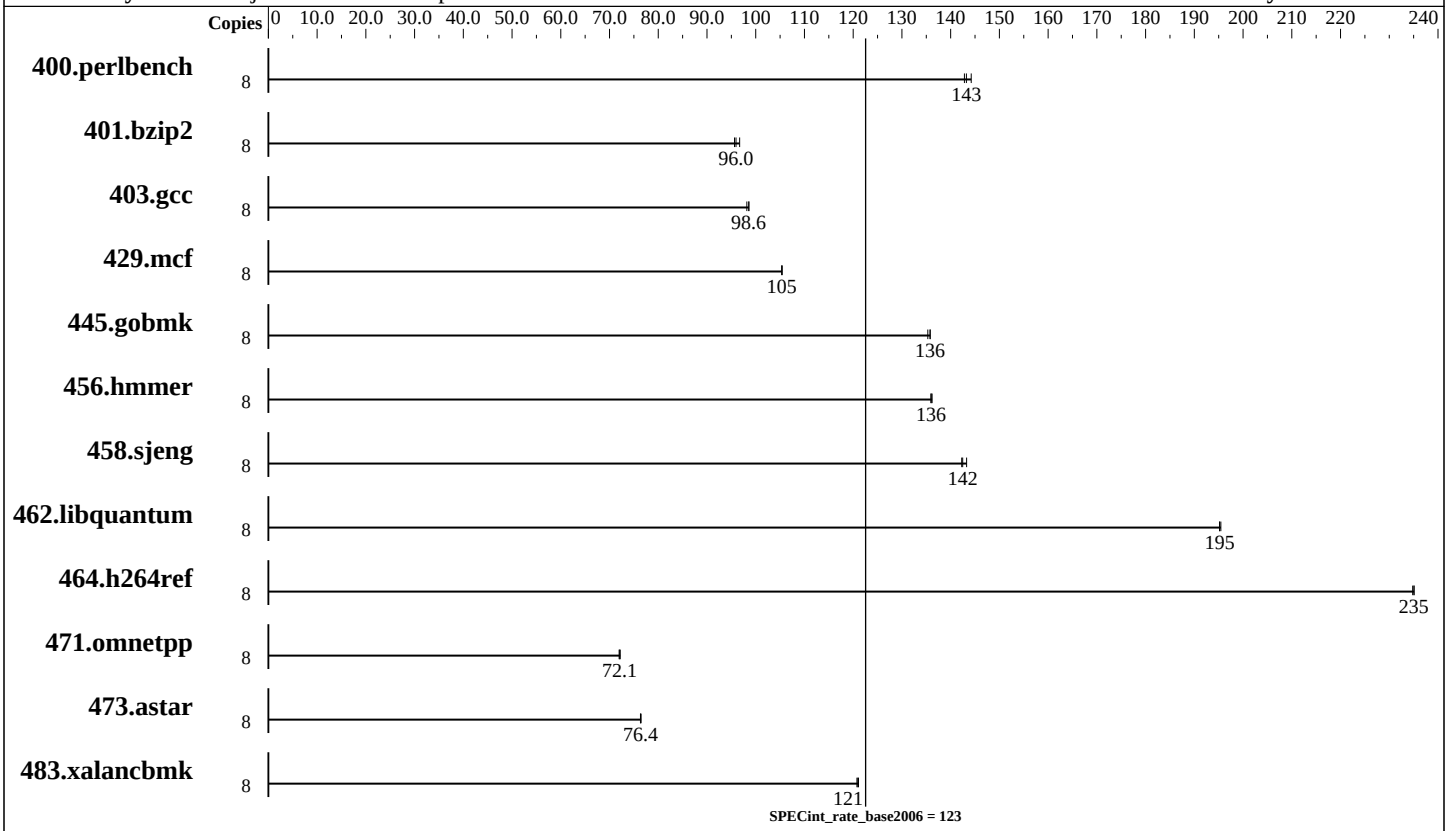

Hardware

CPU Name:	Intel Xeon L5430
CPU Characteristics:	1333 MHz system bus
CPU MHz:	2667
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem:	1x SAS, 73 GB, 15000 rpm
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042
Auto Parallel:	No
File System:	ext3
System State:	Multi-User Run Level 3
Base Pointers:	32-bit
Peak Pointers:	Not Applicable
Other Software:	Microquill SmartHeap Library, Version 8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX200 S4, Intel Xeon L5430, 2.67 GHz

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 123

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Oct-2008
Hardware Availability: Oct-2008
Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	542	144	**546**	**143**	547	143							
401.bzip2	8	798	96.7	807	95.6	**805**	**96.0**							
403.gcc	8	656	98.2	**653**	**98.6**	653	98.6							
429.mcf	8	693	105	692	105	**692**	**105**							
445.gobmk	8	620	135	618	136	**618**	**136**							
456.hmmer	8	**549**	**136**	548	136	549	136							
458.sjeng	8	**679**	**142**	676	143	680	142							
462.libquantum	8	848	195	849	195	**849**	**195**							
464.h264ref	8	753	235	**753**	**235**	754	235							
471.omnetpp	8	693	72.2	695	72.0	**694**	**72.1**							
473.astar	8	736	76.4	734	76.5	**735**	**76.4**							
483.xalancbmk	8	**456**	**121**	457	121	456	121							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 taskset has been used to bind processes to cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
```

Platform Notes

```
BIOS configuration:
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable
Memory Throttling = Enable
```

General Notes

```
For information about Fujitsu Siemens Computers please see:
http://www.fujitsu-siemens.com
```

Base Compiler Invocation

C benchmarks:

```
icc
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.16.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.16.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 21:48:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 November 2008.