



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL465c G5
(2.7 GHz AMD Opteron 2384)

SPECfp®_rate2006 = 116

SPECfp_rate_base2006 = 104

CPU2006 license: 3


Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

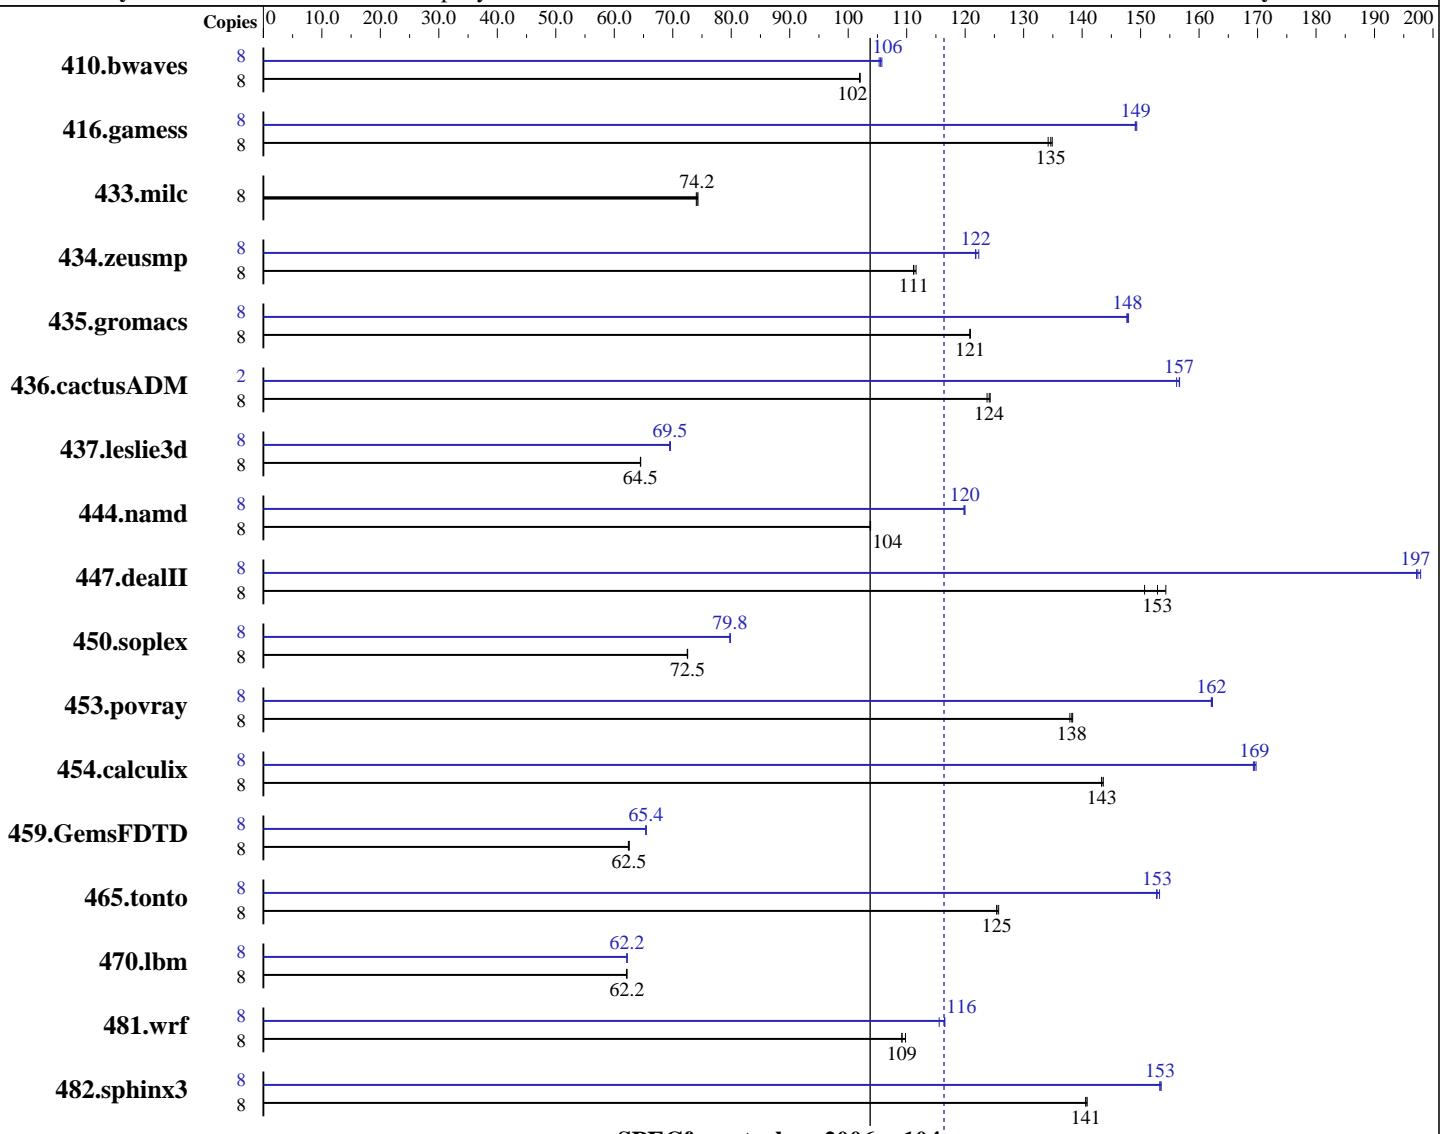

SPECfp_rate_base2006 = 104

SPECfp_rate2006 = 116

Hardware

CPU Name: AMD Opteron 2384
CPU Characteristics:
CPU MHz:
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 64 KB I + 64 KB D on chip per core
Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
Auto Parallel: Yes
File System: ext3
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL465c G5
(2.7 GHz AMD Opteron 2384)

SPECfp_rate2006 = 116

SPECfp_rate_base2006 = 104

CPU2006 license: 3

Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8x4 GB, PC2-6400P CL5)
Disk Subsystem: 2x146 GB 10 K SAS
Other Hardware: None

Other Software: binutils 2.17.50
32-bit and 64-bit libhugetlbfis libraries

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1067	102	1066	102	1066	102	8	1028	106	1030	106	1033	105
416.gamess	8	1161	135	1167	134	1163	135	8	1050	149	1049	149	1051	149
433.milc	8	990	74.2	992	74.0	988	74.3	8	990	74.2	992	74.0	988	74.3
434.zeusmp	8	654	111	652	112	655	111	8	598	122	595	122	598	122
435.gromacs	8	473	121	473	121	473	121	8	386	148	387	148	387	148
436.cactusADM	8	773	124	769	124	770	124	2	153	157	153	157	153	156
437.leslie3d	8	1166	64.5	1166	64.5	1165	64.5	8	1080	69.6	1082	69.5	1082	69.5
444.namd	8	618	104	618	104	618	104	8	535	120	536	120	535	120
447.dealII	8	607	151	599	153	593	154	8	462	198	464	197	464	197
450.soplex	8	920	72.5	921	72.5	920	72.5	8	836	79.8	836	79.8	836	79.8
453.povray	8	308	138	309	138	308	138	8	263	162	262	162	263	162
454.calculix	8	460	143	461	143	460	144	8	389	170	390	169	389	169
459.GemsFDTD	8	1358	62.5	1360	62.4	1357	62.5	8	1298	65.4	1297	65.4	1297	65.5
465.tonto	8	628	125	628	125	626	126	8	515	153	515	153	514	153
470.lbm	8	1768	62.2	1770	62.1	1768	62.2	8	1768	62.2	1768	62.2	1768	62.2
481.wrf	8	814	110	818	109	818	109	8	767	116	773	116	767	117
482.sphinx3	8	1109	141	1107	141	1109	141	8	1017	153	1016	154	1017	153

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

Environment stack size set to 'unlimited'
Max locked memory set to 2097152
The libhugetlbfis libraries were installed using the
installation rpms that came with the distribution.
PGI_HUGE_PAGES set to 896.
Total number of huge pages available is 7168.
NCPUS set to number of cores



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL465c G5
(2.7 GHz AMD Opteron 2384)

SPECfp_rate2006 = 116

SPECfp_rate_base2006 = 104

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Jun-2008

Platform Notes

BIOS configuration:

Power Regulator set to Static High Performance Mode

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_MORECORE = "yes"

NCPUS = "4"

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL465c G5
(2.7 GHz AMD Opteron 2384)

SPECfp_rate2006 = 116

SPECfp_rate_base2006 = 104

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Jun-2008

Base Optimization Flags

C benchmarks:

```
-Mvect=cachesize:6291456 -fastsse -Msmartralloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

C++ benchmarks:

```
-Mvect=cachesize:6291456 -fastsse -Msmartralloc=huge -Mfprelaxed  
--zc_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Fortran benchmarks:

```
-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartralloc=huge  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Benchmarks using both Fortran and C:

```
-Mvect=cachesize:6291456 -fastsse -Msmartralloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Base Other Flags

C benchmarks:

```
-Mipa=jobs:4
```

C++ benchmarks:

```
-Mipa=jobs:4
```

Fortran benchmarks:

```
-Mipa=jobs:4
```

Benchmarks using both Fortran and C:

```
-Mipa=jobs:4
```

Peak Compiler Invocation

C benchmarks:

```
pgcc
```

C++ benchmarks (except as noted below):

```
pathCC
```

444.namd: pgcpp

Fortran benchmarks (except as noted below):

```
pathf95
```

410.bwaves: pgf95

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL465c G5
(2.7 GHz AMD Opteron 2384)

SPECfp_rate2006 = 116

SPECfp_rate_base2006 = 104

CPU2006 license: 3

Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: pathcc pathf95

481.wrf: pathcc pathf95

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

```

470.lbm: -Mvect=cachesize:6291456 -fastsse -Msmartralloc=huge
         -Mprefetch=t0 -Mloop32 -Mfprelaxed -Mipa=fast -Mipa=inline
         -tp barcelona-64 -Bstatic_pgi

```

```

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
              -Mipa=fast(pass 2) -Mipa=inline(pass 2)
              -Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartralloc
              -tp barcelona-64 -Bstatic_pgi

```

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL465c G5
(2.7 GHz AMD Opteron 2384)

SPECfp_rate2006 = 116

SPECfp_rate_base2006 = 104

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

```
444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
           -Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
           -Munroll=n:4 -Munroll=m:8 -Msmartralloc=huge -Mnodepchk
           -Mfprelaxed --zc_eh -tp barcelona-64 -Bstatic_pgi
```

```
447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
             -fno-exceptions -m32
```

```
450.soplex: -march=barcelona -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3
             -INLINE:aggressive=on -OPT:IEEE_arith=3
             -OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on
             -OPT:malloc_alg=1 -CG:load_exe=0 -fno-exceptions -m32
```

```
453.povray: -march=barcelona -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
```

Fortran benchmarks:

```
410.bwaves: -Mvect=cachesize:6291456 -fastsse -Msmartralloc
             -Mprefetch=nta -Mfprelaxed -Mipa=fast -Mipa=inline
             -tp barcelona-64 -Bstatic_pgi
```

```
416.gamess: -march=barcelona -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2)
             -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
             -L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3
             -OPT:unroll_size=256
```

```
434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfprelaxed
             -Mprefetch=distance:8 -Mprefetch=t0 -Msmartralloc=huge
             -Msmartralloc=hugebss -Mipa=fast -Mipa=inline
             -tp barcelona-64 -Bstatic_pgi
```

```
437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
                -Mipa=fast(pass 2) -Mipa=inline(pass 2)
                -Mvect=cachesize:6291456 -fastsse -Mvect=fuse
                -Msmartralloc=huge -Mprefetch=distance:8 -Mprefetch=t0
                -Mfprelaxed -tp barcelona-64 -Bstatic_pgi
```

```
459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
                 -LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:prefer_lru_reg=off
                 -OPT:malloc_alg=1
                 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
                 -L/usr/lib64 -lhugetlbfs
```

```
465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
              -LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
              -OPT:malloc_alg=1
              -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
              -L/usr/lib64 -lhugetlbfs
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL465c G5
(2.7 GHz AMD Opteron 2384)

SPECfp_rate2006 = 116

SPECfp_rate_base2006 = 104

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT  
-L/usr/lib64 -lhugetlbfs
```

```
436.cactusADM: -Mvect=cachesize:6291456 -fastsse -Mconcur  
-Msmartralloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic_pgi
```

```
454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-Mvect=cachesize:6291456 -fastsse -Msmartralloc=huge  
-Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64  
-Bstatic_pgi
```

```
481.wrf: -march=barcelona -Ofast -LNO:blocking=off  
-LNO:prefetch_ahead=10 -LANG:copyinout=off  
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on  
-OPT:malloc_alg=1 -m3dnow  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT  
-L/usr/lib64 -lhugetlbfs
```

Peak Other Flags

C benchmarks:

-Mipa=jobs : 4(pass 2)

C++ benchmarks:

```
444.namd: -Mipa=jobs : 4(pass 2)
```

Fortran benchmarks (except as noted below):

-Mipa=jobs : 4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs : 4(pass 2)

435.gromacs: No flags used

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL465c G5
(2.7 GHz AMD Opteron 2384)

SPECfp_rate2006 = 116

SPECfp_rate_base2006 = 104

CPU2006 license: 3

Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Peak Other Flags (Continued)

481.wrf: No flags used

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.html>

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.xml>

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 21:45:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 November 2008.