



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp®_rate2006 = Not Run

ACTINA SOLAR 222 X2 (Intel Xeon E5410, 2.33 GHz)

SPECfp_rate_base2006 = 36.9

CPU2006 license: 9008


Test date: Dec-2008

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2008

Tested by: ACTION S.A.

Software Availability: Nov-2008

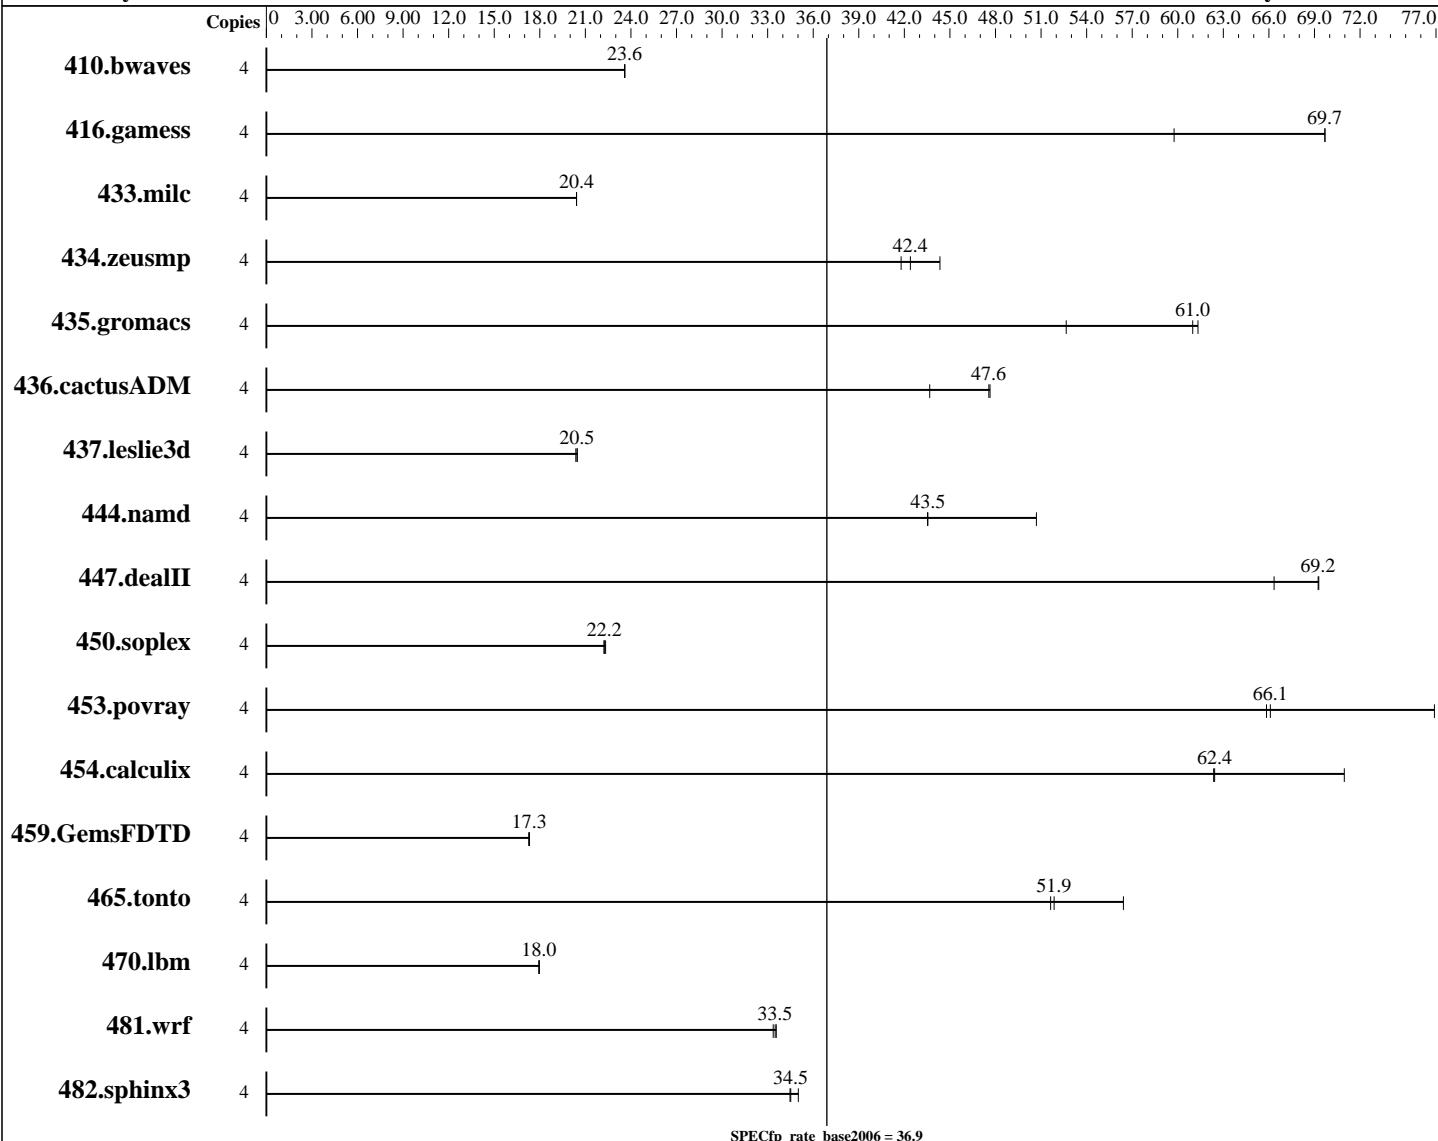

Hardware

CPU Name: Intel Xeon E5410
CPU Characteristics: 1333 MHz System Bus
CPU MHz: 2333
FPU: Integrated
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) with SP2, kernel 2.6.16.60-0.21-smp
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042, l_fproc_b_11.0.042
Auto Parallel: No
File System: ReiserFS
System State: Run level 3 (multi-user)
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = Not Run

ACTINA SOLAR 222 X2 (Intel Xeon E5410, 2.33 GHz)

SPECfp_rate_base2006 = 36.9

CPU2006 license: 9008

Test date: Dec-2008

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2008

Tested by: ACTION S.A.

Software Availability: Nov-2008

L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x 2 GB, PC2-5300, CL 5-5-5, FB ECC)
 Disk Subsystem: 500 GB SATA, 7200 RPM
 Other Hardware: None

Peak Pointers: Not Applicable
 Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	2304	23.6	2305	23.6	2304	23.6							
416.gamess	4	1124	69.7	1311	59.8	1124	69.7							
433.milc	4	1798	20.4	1799	20.4	1798	20.4							
434.zeusmp	4	859	42.4	871	41.8	821	44.3							
435.gromacs	4	466	61.3	542	52.7	468	61.0							
436.cactusADM	4	1005	47.6	1095	43.7	1003	47.6							
437.leslie3d	4	1838	20.5	1846	20.4	1837	20.5							
444.namd	4	737	43.5	737	43.5	633	50.7							
447.dealII	4	661	69.2	660	69.3	690	66.3							
450.soplex	4	1501	22.2	1499	22.2	1494	22.3							
453.povray	4	323	65.8	322	66.1	277	76.9							
454.calculix	4	529	62.4	529	62.4	465	71.0							
459.GemsFDTD	4	2457	17.3	2451	17.3	2451	17.3							
465.tonto	4	762	51.6	759	51.9	698	56.4							
470.lbm	4	3062	18.0	3062	17.9	3059	18.0							
481.wrf	4	1334	33.5	1339	33.4	1331	33.6							
482.sphinx3	4	2258	34.5	2262	34.5	2226	35.0							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Platform Notes

This result is measured on ACTINA SOLAR 222 X2.

Note that the ACTINA SOLAR 222 X2 and ACTINA SOLAR 212 X2 are electrically equivalent.

General Notes

taskset was used to bind processes to cores except for 436.cactusADM peak
 'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = Not Run

ACTINA SOLAR 222 X2 (Intel Xeon E5410, 2.33 GHz)

SPECfp_rate_base2006 = 36.9

CPU2006 license: 9008

Test date: Dec-2008

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2008

Tested by: ACTION S.A.

Software Availability: Nov-2008

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
  444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
  481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = Not Run

ACTINA SOLAR 222 X2 (Intel Xeon E5410, 2.33 GHz)

SPECfp_rate_base2006 = 36.9

CPU2006 license: 9008

Test date: Dec-2008

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2008

Tested by: ACTION S.A.

Software Availability: Nov-2008

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.02.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 22:49:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 January 2009.