SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX201 (Intel Xeon E5440)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 71.7

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Jan-2009
Hardware Availability: Dec-2007
Software Availability: Nov-2008

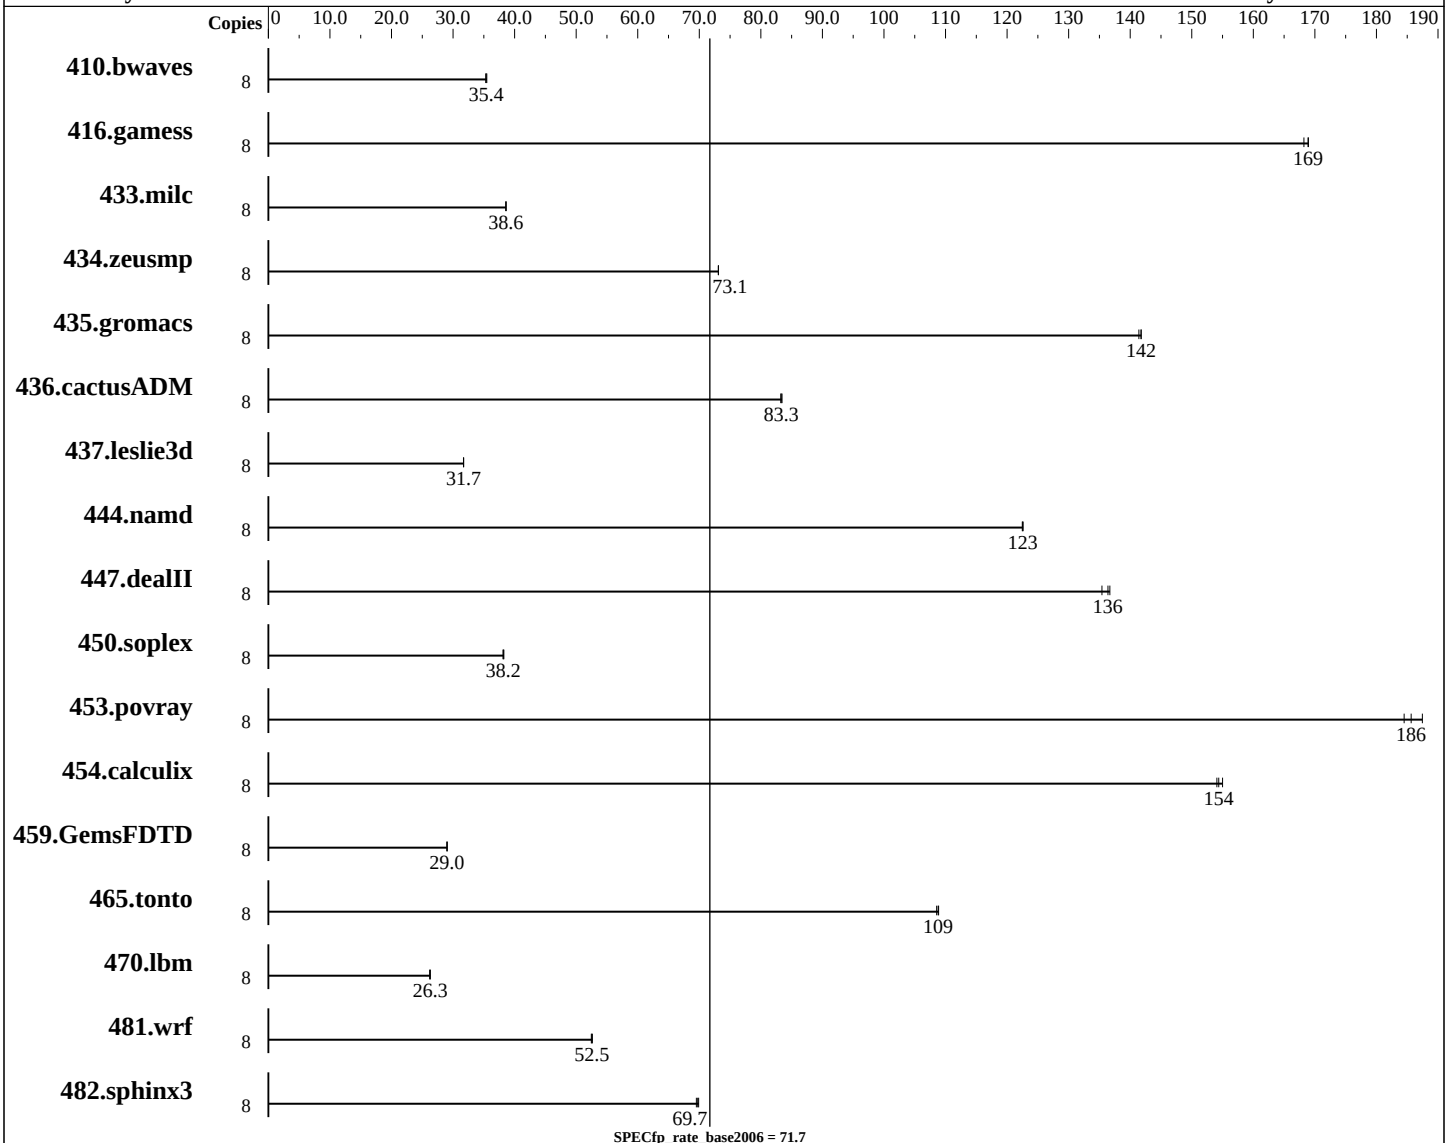

Hardware

CPU Name:	Intel Xeon E5440
CPU Characteristics:	
CPU MHz:	2830
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16-60.0.21-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20081105 Package ID: l_cproc_b_11.0.074, l_fproc_b_11.0.074
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX201 (Intel Xeon E5440)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 71.7

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Jan-2009
Hardware Availability: Dec-2007
Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (4 * 4 GB PC2-5300 FBDIMM, CL-5-5-5, ECC)
Disk Subsystem: 1 x SAS, 36GB, 15000RPM
Other Hardware: None

Peak Pointers: Not Applicable
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3064	35.5	3079	35.3	**3073**	**35.4**							
416.gamess	8	927	169	**927**	**169**	931	168							
433.milc	8	1903	38.6	1903	38.6	**1903**	**38.6**							
434.zeusmp	8	996	73.1	**996**	**73.1**	996	73.1							
435.gromacs	8	404	141	403	142	**403**	**142**							
436.cactusADM	8	1149	83.2	1146	83.4	**1147**	**83.3**							
437.leslie3d	8	2373	31.7	2370	31.7	**2372**	**31.7**							
444.namd	8	523	123	**524**	**123**	524	122							
447.dealII	8	**671**	**136**	676	135	670	137							
450.soplex	8	1750	38.1	1744	38.3	**1748**	**38.2**							
453.povray	8	227	187	**229**	**186**	231	184							
454.calculix	8	428	154	426	155	**428**	**154**							
459.GemsFDTD	8	**2924**	**29.0**	2925	29.0	2924	29.0							
465.tonto	8	**724**	**109**	725	109	723	109							
470.lbm	8	4195	26.2	**4182**	**26.3**	4181	26.3							
481.wrf	8	**1701**	**52.5**	1703	52.5	1698	52.6							
482.sphinx3	8	2243	69.5	2231	69.9	**2236**	**69.7**							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
'/usr/bin/taskset' used to bind benchmark copies to processors.
```

Platform Notes

```
BIOS Settings:
Hardware Prefetcher Disabled
```

General Notes

```
This result was measured on the Servidor Itautec MX221.
The Servidor Itautec MX201 and the Servidor Itautec MX221 are electronically equivalent.
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:
`-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.html`
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revE.20090710.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.xml`
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revE.20090710.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:12:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 February 2009.