SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/i120Ra-e1
(Intel Xeon L5215)

SPECfp®_rate2006 = 22.8

SPECfp_rate_base2006 = 22.0

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Feb-2009
Hardware Availability: Jan-2009
Software Availability: Nov-2008

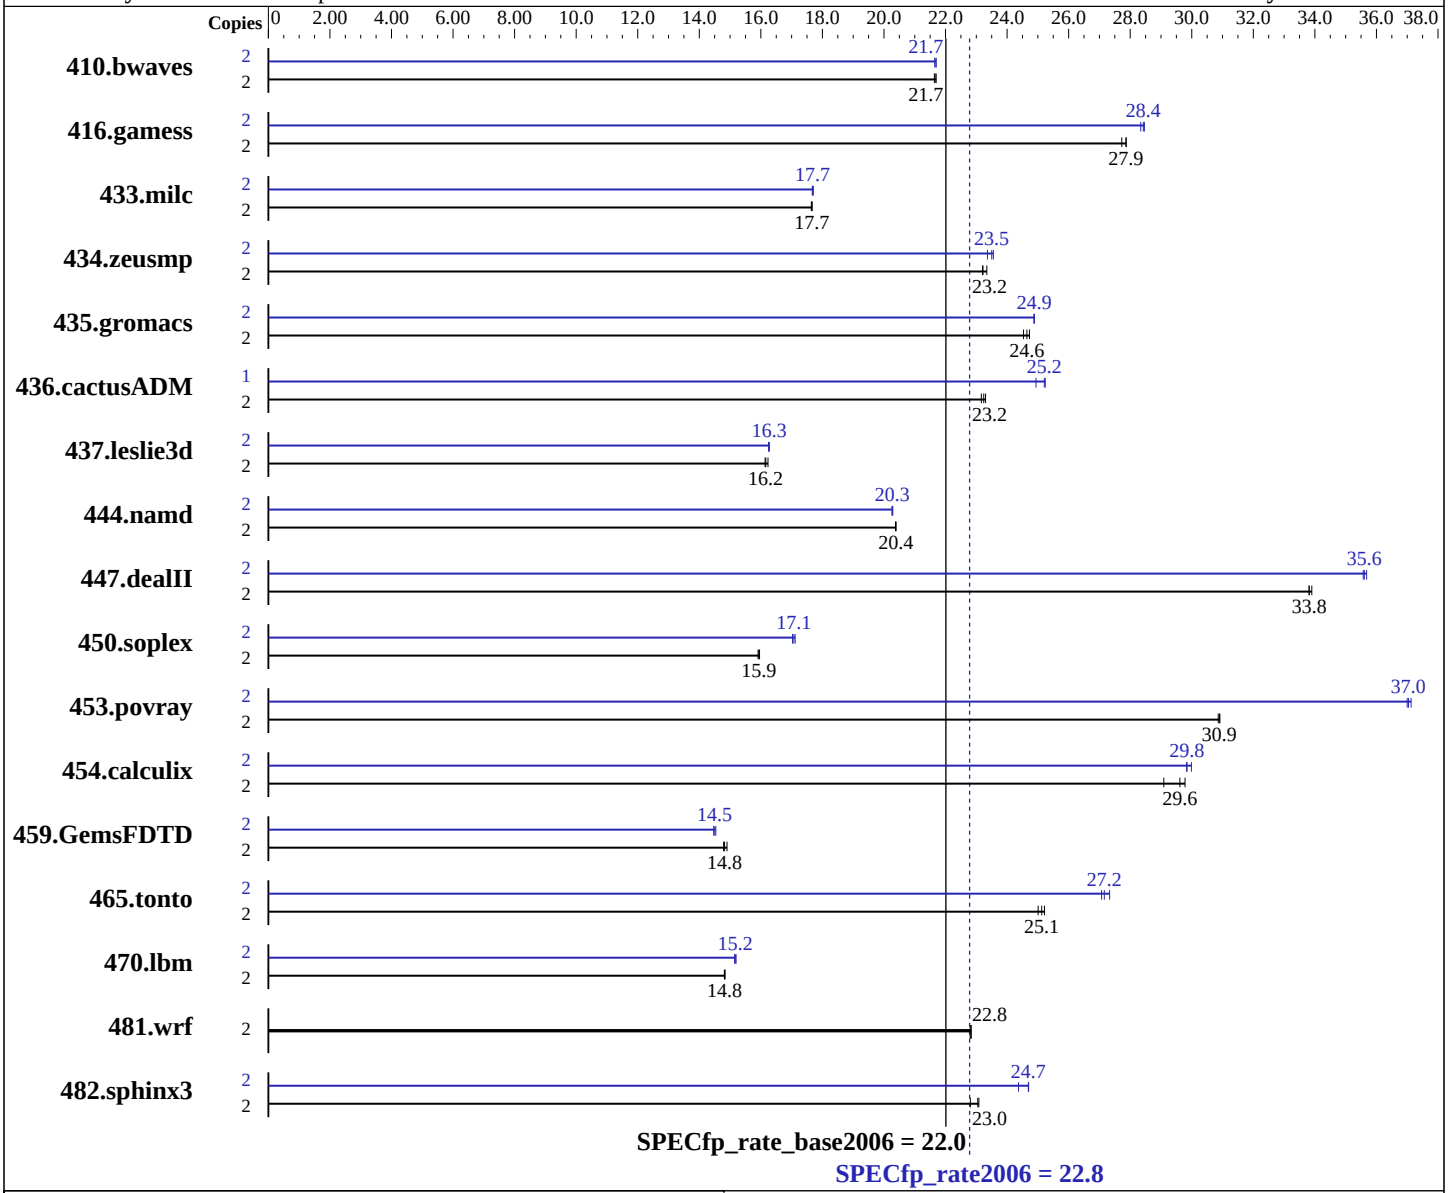

Hardware

CPU Name:	Intel Xeon L5215
CPU Characteristics:	1066 MHz system bus
CPU MHz:	1867
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20081105 Package ID: l_cproc_p_11.0.074, l_cprof_p_11.0.074
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/i120Ra-e1
(Intel Xeon L5215)

SPECfp_rate2006 = 22.8

SPECfp_rate_base2006 = 22.0

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Feb-2009
Hardware Availability: Jan-2009
Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (4x4 GB PC2-5300P, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x80 GB SATAII, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	1256	21.6	1253	21.7	**1255**	**21.7**	2	1256	21.6	1253	21.7	**1253**	**21.7**
416.gamess	2	1412	27.7	1405	27.9	**1406**	**27.9**	2	1382	28.3	1376	28.5	**1378**	**28.4**
433.milc	2	**1040**	**17.7**	1039	17.7	1041	17.6	2	1039	17.7	1037	17.7	**1038**	**17.7**
434.zeusmp	2	780	23.3	**784**	**23.2**	784	23.2	2	779	23.4	**774**	**23.5**	773	23.6
435.gromacs	2	582	24.5	578	24.7	**579**	**24.6**	2	574	24.9	**574**	**24.9**	574	24.9
436.cactusADM	2	1026	23.3	**1028**	**23.2**	1032	23.2	1	479	24.9	473	25.2	**474**	**25.2**
437.leslie3d	2	**1163**	**16.2**	1165	16.1	1158	16.2	2	1157	16.3	**1155**	**16.3**	1155	16.3
444.namd	2	**787**	**20.4**	787	20.4	787	20.4	2	**791**	**20.3**	792	20.3	791	20.3
447.dealII	2	675	33.9	**677**	**33.8**	677	33.8	2	643	35.6	**643**	**35.6**	641	35.7
450.soplex	2	**1047**	**15.9**	1048	15.9	1045	16.0	2	980	17.0	**977**	**17.1**	975	17.1
453.povray	2	345	30.9	344	30.9	**344**	**30.9**	2	288	37.0	**287**	**37.0**	287	37.1
454.calculix	2	554	29.8	**557**	**29.6**	567	29.1	2	550	30.0	553	29.8	**553**	**29.8**
459.GemsFDTD	2	1435	14.8	**1432**	**14.8**	1424	14.9	2	1467	14.5	**1463**	**14.5**	1460	14.5
465.tonto	2	780	25.2	787	25.0	**783**	**25.1**	2	**725**	**27.2**	727	27.1	720	27.3
470.lbm	2	1852	14.8	1855	14.8	**1854**	**14.8**	2	1808	15.2	**1811**	**15.2**	1814	15.1
481.wrf	2	978	22.8	**979**	**22.8**	980	22.8	2	978	22.8	**979**	**22.8**	980	22.8
482.sphinx3	2	1709	22.8	**1691**	**23.0**	1689	23.1	2	1599	24.4	**1579**	**24.7**	1578	24.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 taskset was used to bind processes to cores except
 for 436.cactusADM peak
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M
```

Platform Notes

```
Bios settings:
Hardware Prefetcher:                Enabled
Adjacent Cache Line Prefetch:       Enabled
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:
`-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

482.sphinx3: `/opt/intel/Compiler/11.0/074/bin/ia32/icc -L/opt/intel/Compiler/11.0/074/ipp/ia32/lib -I/opt/intel/Compiler/11.0/074/ipp/ia32/include`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/Compiler/11.0/074/bin/ia32/icpc -L/opt/intel/Compiler/11.0/074/ipp/ia32/lib -I/opt/intel/Compiler/11.0/074/ipp/ia32/include`

Fortran benchmarks (except as noted below):
`ifort`

437.leslie3d: `/opt/intel/Compiler/11.0/074/bin/ia32/ifort -L/opt/intel/Compiler/11.0/074/ipp/ia32/lib -I/opt/intel/Compiler/11.0/074/ipp/ia32/include`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -ansi-alias
-scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch

Continued on next page

Peak Optimization Flags (Continued)

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -opt-prefetch -parallel -auto-ilp32`

454.calculix: `-xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revE.20090710.html`
`http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revE.20090710.xml`
`http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:02:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 March 2009.