



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp[®]2006 = 37.7

Supermicro X8DAI (Intel Xeon W3570, 3.2 GHz)

SPECfp_base2006 = 36.8

CPU2006 license: 13


Test date: Mar-2009

Test sponsor: Intel Corporation

Hardware Availability: Mar-2009

Tested by: Intel Corporation

Software Availability: Nov-2007

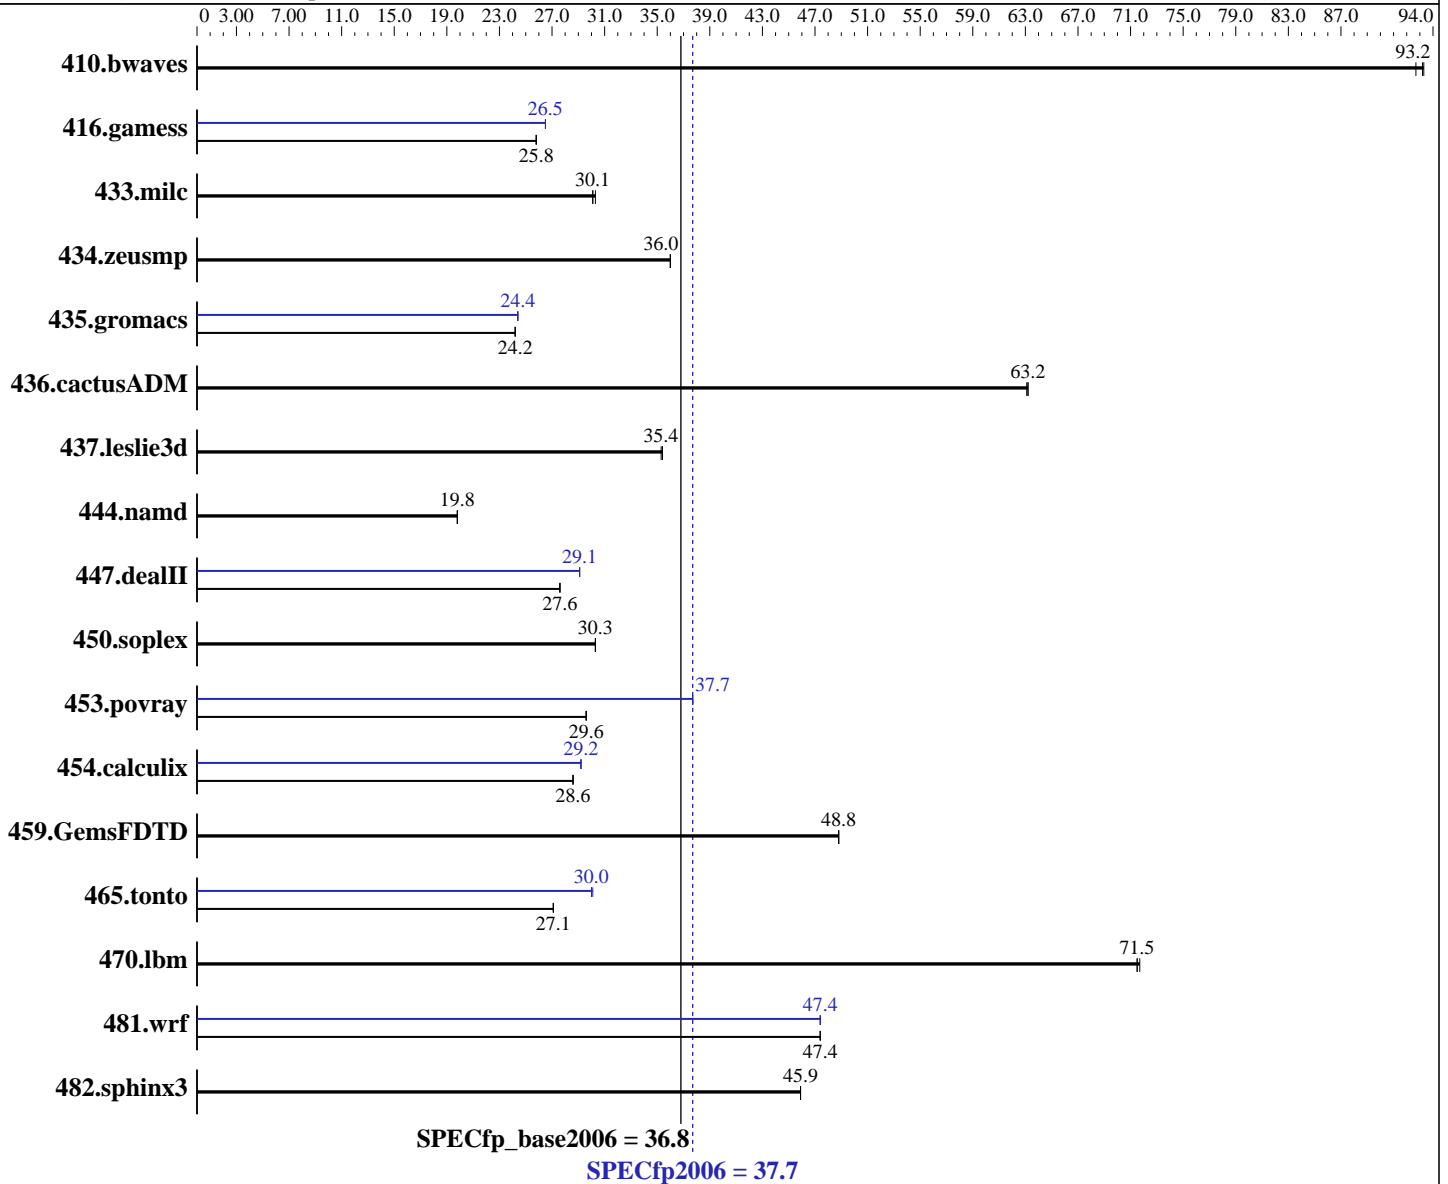

Hardware

CPU Name: Intel Xeon W3570
 CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Windows* XP* Professional x64 Edition SP2 Build 3790
 Compiler: Intel C++ Compiler Professional 11.0 for Intel 64 Build 20090131 Package ID: w_cproc_p_11.0.072
 Intel Visual Fortran Compiler Professional 11.0 for Intel 64 Build 20090131 Package ID: w_cprof_p_11.0.072
 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
 Auto Parallel: Yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = **37.7**

Supermicro X8DAI (Intel Xeon W3570, 3.2 GHz)

SPECfp_base2006 = **36.8**

CPU2006 license: 13

Test date: Mar-2009

Test sponsor: Intel Corporation

Hardware Availability: Mar-2009

Tested by: Intel Corporation

Software Availability: Nov-2007

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 12 GB (3 x 4GB DDR3-1333 CL9, IMHH4GP12A1F1C-13H T2)
 Disk Subsystem: Western Digital Raptor WD740, 10k rpm, 74GB SATA
 Other Hardware: None

File System: NTFS
 System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	147	92.7	<u>146</u>	<u>93.2</u>	146	93.3	147	92.7	<u>146</u>	<u>93.2</u>	146	93.3
416.gamess	758	25.8	<u>758</u>	<u>25.8</u>	758	25.8	739	26.5	<u>739</u>	<u>26.5</u>	739	26.5
433.milc	303	30.3	<u>305</u>	<u>30.1</u>	305	30.1	303	30.3	<u>305</u>	<u>30.1</u>	305	30.1
434.zeusmp	253	36.0	<u>253</u>	<u>36.0</u>	253	36.0	253	36.0	<u>253</u>	<u>36.0</u>	253	36.0
435.gromacs	295	24.2	<u>295</u>	<u>24.2</u>	295	24.2	292	24.4	<u>292</u>	<u>24.4</u>	292	24.4
436.cactusADM	189	63.1	189	63.2	<u>189</u>	<u>63.2</u>	189	63.1	<u>189</u>	<u>63.2</u>	<u>189</u>	<u>63.2</u>
437.leslie3d	266	35.4	<u>266</u>	<u>35.4</u>	266	35.3	266	35.4	<u>266</u>	<u>35.4</u>	266	35.3
444.namd	406	19.8	406	19.8	<u>406</u>	<u>19.8</u>	406	19.8	406	19.8	<u>406</u>	<u>19.8</u>
447.dealII	414	27.6	<u>414</u>	<u>27.6</u>	414	27.6	393	29.1	<u>393</u>	<u>29.1</u>	393	29.1
450.soplex	275	30.3	275	30.3	<u>275</u>	<u>30.3</u>	275	30.3	275	30.3	<u>275</u>	<u>30.3</u>
453.povray	<u>180</u>	<u>29.6</u>	180	29.6	180	29.6	141	37.7	<u>141</u>	<u>37.7</u>	141	37.7
454.calculix	288	28.6	288	28.6	<u>288</u>	<u>28.6</u>	283	29.2	<u>283</u>	<u>29.2</u>	283	29.2
459.GemsFDTD	217	48.8	217	48.8	<u>217</u>	<u>48.8</u>	217	48.8	217	48.8	<u>217</u>	<u>48.8</u>
465.tonto	<u>363</u>	<u>27.1</u>	364	27.1	363	27.1	328	30.0	327	30.1	<u>328</u>	<u>30.0</u>
470.lbm	192	71.7	<u>192</u>	<u>71.5</u>	192	71.5	192	71.7	<u>192</u>	<u>71.5</u>	192	71.5
481.wrf	236	47.4	<u>236</u>	<u>47.4</u>	236	47.4	<u>236</u>	<u>47.4</u>	236	47.4	236	47.4
482.sphinx3	<u>425</u>	<u>45.9</u>	425	45.9	425	45.9	<u>425</u>	<u>45.9</u>	425	45.9	425	45.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

OMP_NUM_THREADS set to number of processors cores
 KMP_AFFINITY set to granularity=fine,scatter
 System can be built with an extended ATX case like SuperChassis
 743TQ-865B-SQ and an 885W power supply.

Base Compiler Invocation

C benchmarks:
 icl -Qvc9 -Qstd=c99

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 37.7

Supermicro X8DAI (Intel Xeon W3570, 3.2 GHz)

SPECfp_base2006 = 36.8

CPU2006 license: 13

Test date: Mar-2009

Test sponsor: Intel Corporation

Hardware Availability: Mar-2009

Tested by: Intel Corporation

Software Availability: Nov-2007

Base Compiler Invocation (Continued)

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64 /Qlowercase
 416.gamess: -DSPEC_CPU_P64
 433.milc: -DSPEC_CPU_P64
 434.zeusmp: -DSPEC_CPU_P64
 435.gromacs: -DSPEC_CPU_P64
 436.cactusADM: -DSPEC_CPU_P64 -Qlowercase /assume:underscore
 437.leslie3d: -DSPEC_CPU_P64
 444.namd: -DSPEC_CPU_P64 /TP
 447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
 450.soplex: -DSPEC_CPU_P64
 453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -Qlowercase
 459.GemsFDTD: -DSPEC_CPU_P64
 465.tonto: -DSPEC_CPU_P64
 470.lbm: -DSPEC_CPU_P64
 481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
-Qauto-ilp32 /F1000000000

C++ benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlW64Mt.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
/F1000000000

Benchmarks using both Fortran and C:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
-Qauto-ilp32 /F1000000000



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 37.7

Supermicro X8DAI (Intel Xeon W3570, 3.2 GHz)

SPECfp_base2006 = 36.8

CPU2006 license: 13

Test date: Mar-2009

Test sponsor: Intel Corporation

Hardware Availability: Mar-2009

Tested by: Intel Corporation

Software Availability: Nov-2007

Peak Compiler Invocation

C benchmarks:

icl -Qvc9 -Qstd=c99

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch
-Qansi-alias -Qscalar-rep- -Qauto-ilp32 /F1000000000
shlW64Mt.lib -link /FORCE:MULTIPLE

450.soplex: basepeak = yes

453.povray: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32
/F1000000000 shlW64Mt.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 37.7

Supermicro X8DAI (Intel Xeon W3570, 3.2 GHz)

SPECfp_base2006 = 36.8

CPU2006 license: 13

Test date: Mar-2009

Test sponsor: Intel Corporation

Hardware Availability: Mar-2009

Tested by: Intel Corporation

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

416.gamess: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias
-Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
/F1000000000

436.cactusADM: basepeak = yes

454.calculix: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qauto-ilp32 /F1000000000

481.wrf: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel
-Qauto-ilp32 /F1000000000

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-winx64-revA.html>

<http://www.spec.org/cpu2006/flags/Intel-Winx64-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-winx64-revA.xml>

<http://www.spec.org/cpu2006/flags/Intel-Winx64-Platform.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:20:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 March 2009.