SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

NTT Tytan S8 Series (Intel Xeon E5410)

SPECfp®_rate2006 = 71.8

SPECfp_rate_base2006 = 65.9

CPU2006 license: 9013
Test sponsor: NTT System S. A.
Tested by: NTT System S. A.

Test date: Jan-2009
Hardware Availability: Dec-2008
Software Availability: Dec-2008

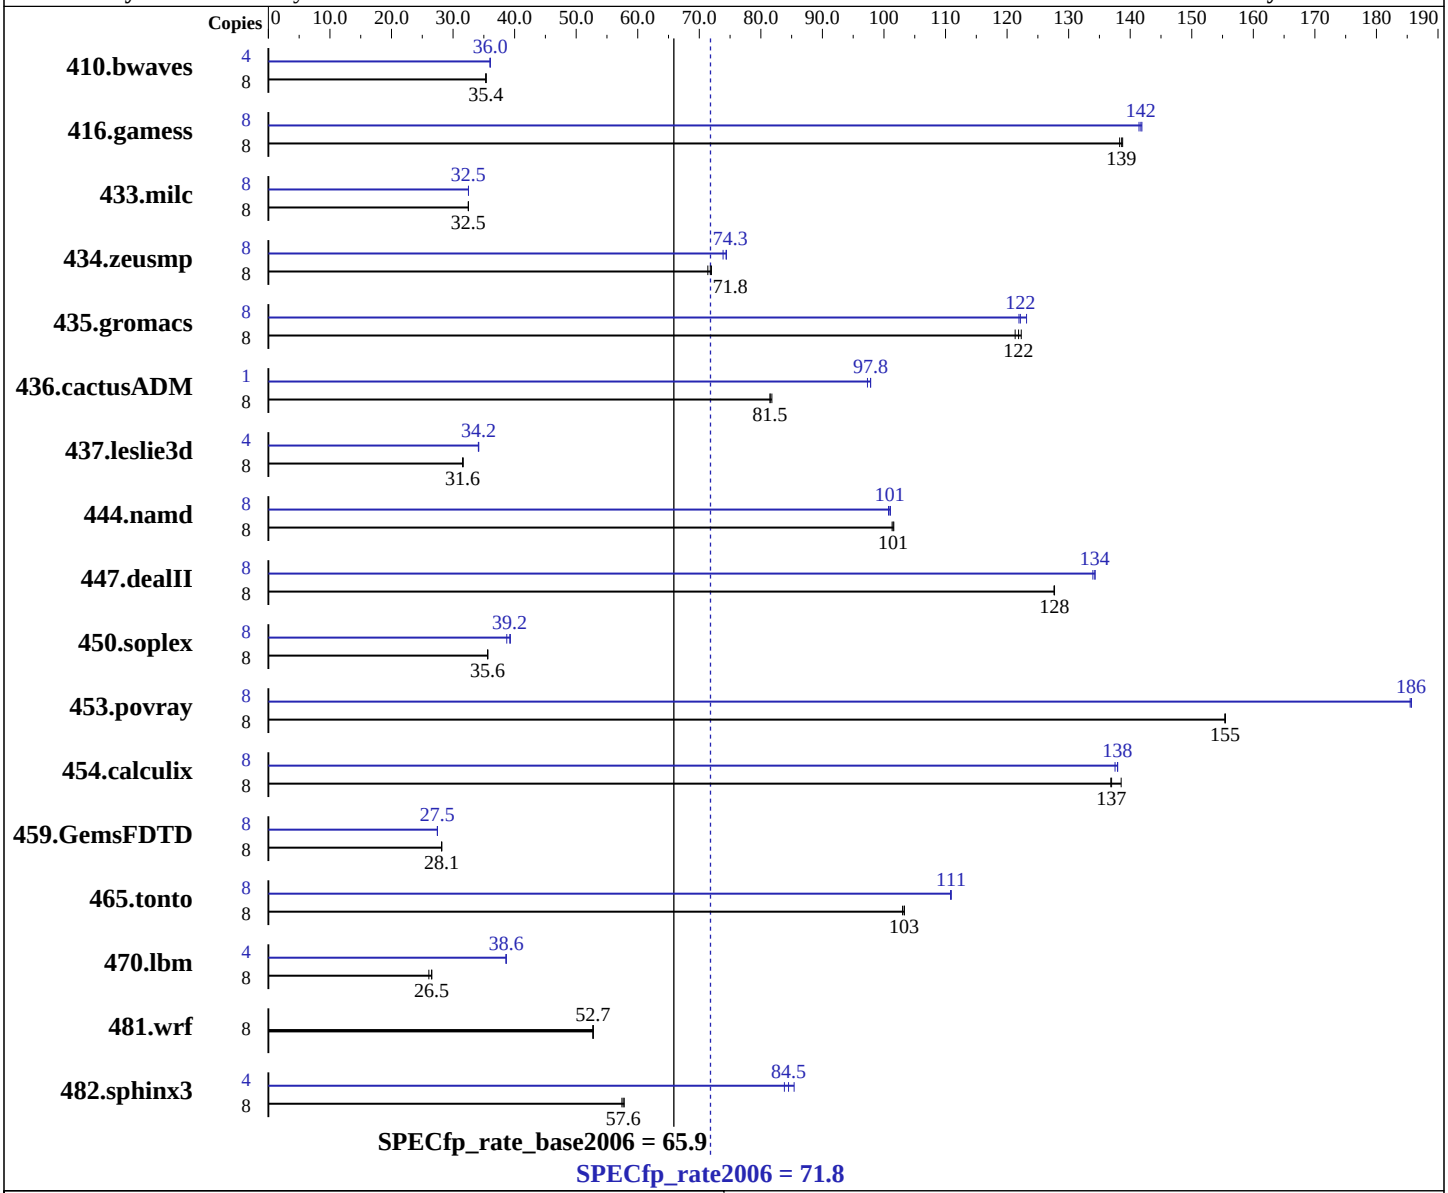

Hardware

CPU Name:	Intel Xeon E5410
CPU Characteristics:	2.33 GHz, 2x6 MB P2 shared, 1333 MHz System Bus
CPU MHz:	2333
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SuSe Linux Enterprise Server 10 SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066, l_cprof_p_11.0.066
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

NTT Tytan S8 Series (Intel Xeon E5410)

SPECfp_rate2006 = 71.8

SPECfp_rate_base2006 = 65.9

CPU2006 license: 9013
Test sponsor: NTT System S. A.
Tested by: NTT System S. A.

Test date: Jan-2009
Hardware Availability: Dec-2008
Software Availability: Dec-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (4 x 4GB DDR2-667 FBDIMM)
Disk Subsystem: 300 GB SATA, 7200RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	**3075**	**35.4**	3073	35.4	3079	35.3	4	**1508**	**36.0**	1508	36.0	1509	36.0
416.gamess	8	1133	138	**1130**	**139**	1129	139	8	**1105**	**142**	1108	141	1104	142
433.milc	8	2261	32.5	**2260**	**32.5**	2260	32.5	8	**2259**	**32.5**	2260	32.5	2259	32.5
434.zeusmp	8	1020	71.4	1011	72.0	**1014**	**71.8**	8	**979**	**74.3**	978	74.4	986	73.9
435.gromacs	8	471	121	**469**	**122**	467	122	8	464	123	**468**	**122**	468	122
436.cactusADM	8	1173	81.5	**1173**	**81.5**	1169	81.8	1	**122**	**97.8**	122	97.8	123	97.3
437.leslie3d	8	**2381**	**31.6**	2377	31.6	2383	31.6	4	1101	34.2	1102	34.1	**1101**	**34.2**
444.namd	8	633	101	**632**	**101**	632	102	8	637	101	**635**	**101**	635	101
447.dealII	8	717	128	**717**	**128**	717	128	8	**682**	**134**	681	134	683	134
450.soplex	8	1874	35.6	1872	35.6	**1872**	**35.6**	8	1723	38.7	1697	39.3	**1701**	**39.2**
453.povray	8	274	155	274	155	**274**	**155**	8	**229**	**186**	229	186	229	185
454.calculix	8	476	139	**482**	**137**	482	137	8	**478**	**138**	480	138	478	138
459.GemsFDTD	8	3017	28.1	3015	28.2	**3015**	**28.1**	8	3092	27.4	**3090**	**27.5**	3090	27.5
465.tonto	8	764	103	762	103	**762**	**103**	8	710	111	710	111	**710**	**111**
470.lbm	8	4217	26.1	**4143**	**26.5**	4143	26.5	4	1423	38.6	**1423**	**38.6**	1423	38.6
481.wrf	8	**1694**	**52.7**	1695	52.7	1693	52.8	8	**1694**	**52.7**	1695	52.7	1693	52.8
482.sphinx3	8	2697	57.8	**2705**	**57.6**	2715	57.4	4	930	83.8	913	85.4	**923**	**84.5**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 taskset was used to bind processes to cores except
 for 436.cactusADM peak
```

Operating System Notes

```
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: -m32 -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -m32 -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static

437.leslie3d: -m32 -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.03.html
http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.03.xml
http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

NTT Tytan S8 Series (Intel Xeon E5410)

SPECfp_rate2006 = 71.8

SPECfp_rate_base2006 = 65.9

CPU2006 license: 9013
Test sponsor: NTT System S. A.
Tested by: NTT System S. A.

Test date: Jan-2009
Hardware Availability: Dec-2008
Software Availability: Dec-2008

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:41:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 April 2009.