SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7450)

SPECfp®_rate2006 = 106

SPECfp_rate_base2006 = 98.0

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Apr-2009
Hardware Availability: Feb-2009
Software Availability: Nov-2008

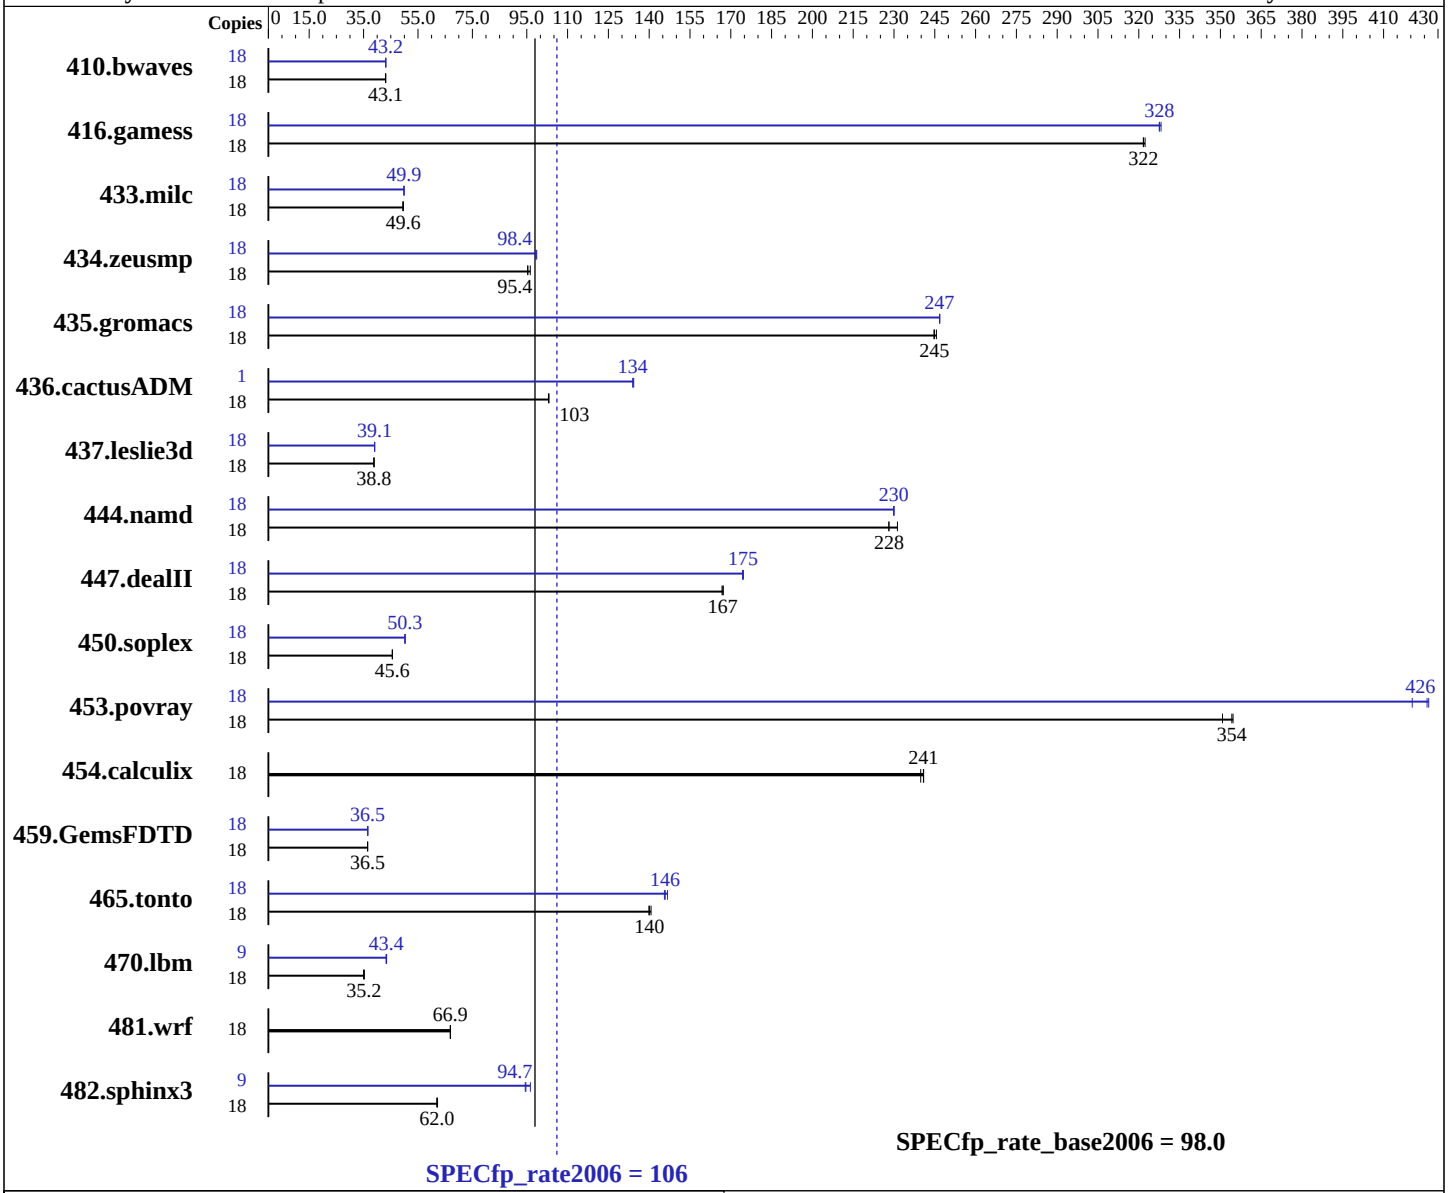

Hardware

CPU Name:	Intel Xeon E7450
CPU Characteristics:	1066 MHz system bus
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	18 cores, 3 chips, 6 cores/chip
CPU(s) orderable:	1,2,3,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	9 MB I+D on chip per chip, 3 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20081105 Package ID: l_cproc_p_11.0.074, l_cprof_p_11.0.074
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7450)

SPECfp_rate2006 = 106

SPECfp_rate_base2006 = 98.0

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Apr-2009
Hardware Availability: Feb-2009
Software Availability: Nov-2008

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (16x4 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x146.5 GB SAS, 10000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	18	5682	43.1	**5672**	**43.1**	5672	43.1	18	5672	43.1	5667	43.2	**5667**	**43.2**
416.gamess	18	1096	322	**1095**	**322**	1093	322	18	**1076**	**328**	1074	328	1076	328
433.milc	18	3341	49.5	3333	49.6	**3334**	**49.6**	18	3318	49.8	3312	49.9	**3313**	**49.9**
434.zeusmp	18	1718	95.3	**1717**	**95.4**	1701	96.3	18	1668	98.2	1661	98.6	**1664**	**98.4**
435.gromacs	18	**525**	**245**	523	246	525	245	18	**521**	**247**	521	247	521	247
436.cactusADM	18	2089	103	2086	103	**2087**	**103**	1	**89.2**	**134**	89.0	134	89.2	134
437.leslie3d	18	4362	38.8	**4357**	**38.8**	4354	38.9	18	4337	39.0	**4330**	**39.1**	4328	39.1
444.namd	18	**633**	**228**	624	231	633	228	18	**628**	**230**	628	230	628	230
447.dealII	18	**1232**	**167**	1235	167	1231	167	18	**1180**	**175**	1181	174	1179	175
450.soplex	18	3296	45.5	**3293**	**45.6**	3290	45.6	18	2985	50.3	**2987**	**50.3**	2993	50.2
453.povray	18	270	355	273	351	**270**	**354**	18	224	427	228	421	**225**	**426**
454.calculix	18	616	241	619	240	**617**	**241**	18	616	241	619	240	**617**	**241**
459.GemsFDTD	18	5237	36.5	**5234**	**36.5**	5233	36.5	18	5229	36.5	5226	36.5	**5228**	**36.5**
465.tonto	18	1266	140	**1264**	**140**	1259	141	18	1207	147	**1214**	**146**	1216	146
470.lbm	18	7064	35.0	**7030**	**35.2**	7015	35.3	9	2858	43.3	**2849**	**43.4**	2845	43.5
481.wrf	18	**3004**	**66.9**	3007	66.9	3003	67.0	18	**3004**	**66.9**	3007	66.9	3003	67.0
482.sphinx3	18	5661	62.0	**5660**	**62.0**	5641	62.2	9	1821	96.3	1857	94.4	**1853**	**94.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 taskset was used to bind processes to cores except
 for 436.cactusADM peak
 For peak modules using 1/2 the number of available cores, copies
 were each assigned to a single L2 cache using mysubmit.pl script.
 See the flags description file for mysubmit.pl details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M
```

Platform Notes

```
Bios settings:
Hardware Prefetcher:              Disabled
Adjacent Cache Line Prefetch:     Disabled
FSB High Bandwidth Optimization:   Enabled
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:
`-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

482.sphinx3: `/opt/intel/Compiler/11.0/074/bin/ia32/icc -L/opt/intel/Compiler/11.0/074/ipp/ia32/lib -I/opt/intel/Compiler/11.0/074/ipp/ia32/include`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/Compiler/11.0/074/bin/ia32/icpc -L/opt/intel/Compiler/11.0/074/ipp/ia32/lib -I/opt/intel/Compiler/11.0/074/ipp/ia32/include`

Fortran benchmarks (except as noted below):
`ifort`

437.leslie3d: `/opt/intel/Compiler/11.0/074/bin/ia32/ifort -L/opt/intel/Compiler/11.0/074/ipp/ia32/lib -I/opt/intel/Compiler/11.0/074/ipp/ia32/include`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -fno-alias

470.lbm: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -ansi-alias
-scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch

Continued on next page

Peak Optimization Flags (Continued)

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSSE3 -ipo -O3 -no-prec-div -static -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSSE3 -ipo -O3 -no-prec-div -static -unroll2 -opt-prefetch -parallel -auto-ilp32`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revG.html
http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revG.xml
http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revD.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:45:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 May 2009.