




SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R905 (AMD Opteron 8389, 2.90 GHz)

SPECint®2006 = 21.7

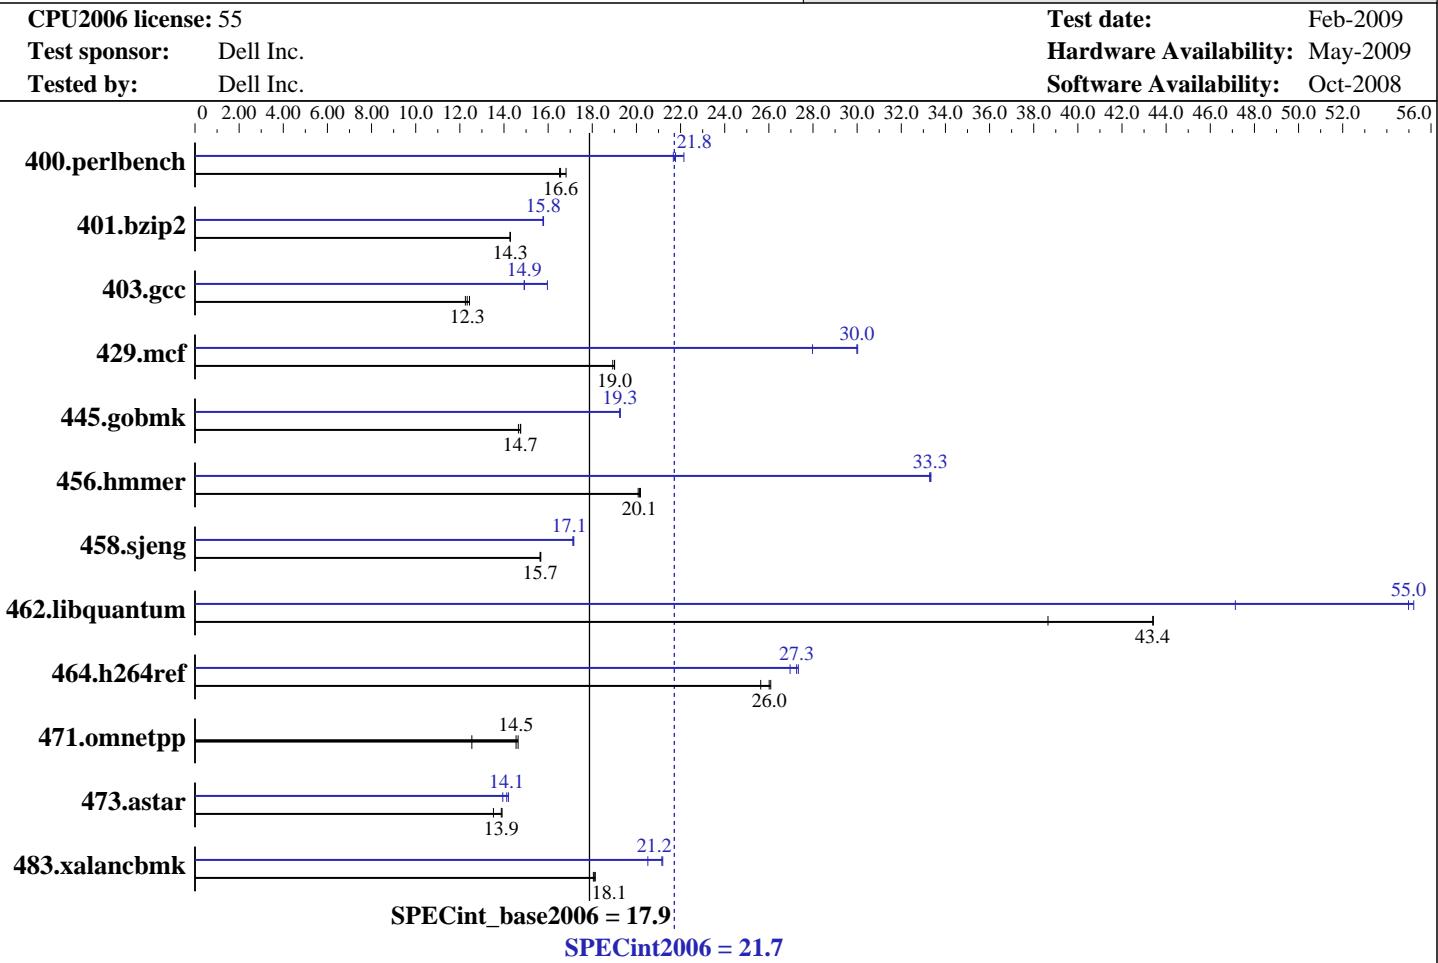

Hardware

CPU Name:	AMD Opteron 8389
CPU Characteristics:	
CPU MHz:	2900
FPU:	Integrated
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip
CPU(s) orderable:	4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	64 GB (16 x 4 GB DDR2-800)
Disk Subsystem:	1 x 73 GB 10000 RPM SAS
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	PGI Server Complete Version 7.2
Auto Parallel:	PathScale Compiler Suite Version 3.2
File System:	No
System State:	ReiserFS
Base Pointers:	Run level 3 (multi-user)
Peak Pointers:	32/64-bit
Other Software:	32/64-bit
	binutils 2.18
	32-bit and 64-bit libhugetlbfs libraries
	SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 21.7

PowerEdge R905 (AMD Opteron 8389, 2.90 GHz)

SPECint_base2006 = 17.9

CPU2006 license: 55

Test date: Feb-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
400.perlbench	581	16.8	591	16.5	590	16.6	449	21.8	441	22.2	451	21.7
401.bzip2	675	14.3	675	14.3	676	14.3	612	15.8	611	15.8	612	15.8
403.gcc	653	12.3	657	12.3	647	12.4	540	14.9	539	14.9	504	16.0
429.mcf	482	18.9	480	19.0	480	19.0	304	30.0	326	28.0	304	30.0
445.gobmk	712	14.7	716	14.7	711	14.8	545	19.3	545	19.2	545	19.3
456.hmmer	463	20.1	462	20.2	465	20.1	280	33.3	280	33.3	280	33.3
458.sjeng	772	15.7	774	15.6	773	15.7	705	17.2	706	17.1	706	17.1
462.libquantum	536	38.6	477	43.4	478	43.4	375	55.2	440	47.1	377	55.0
464.h264ref	848	26.1	863	25.6	851	26.0	821	27.0	810	27.3	812	27.3
471.omnetpp	498	12.5	430	14.5	427	14.6	498	12.5	430	14.5	427	14.6
473.astar	505	13.9	506	13.9	519	13.5	503	13.9	494	14.2	497	14.1
483.xalancbmk	381	18.1	382	18.0	380	18.1	336	20.5	326	21.2	326	21.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores

Operating System Notes

The libhugetlbfs libraries were installed using the installation RPMs that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=14336 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_MORECORE = "yes"

LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd909gh-libs/64:/root/cpu2006-1.1/amd909gh-libs/32"



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 21.7

PowerEdge R905 (AMD Opteron 8389, 2.90 GHz)

SPECint_base2006 = 17.9

CPU2006 license: 55

Test date: Feb-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64  
401.bzip2: -DSPEC_CPU_LP64  
403.gcc: -DSPEC_CPU_LP64  
429.mcf: -DSPEC_CPU_LP64  
445.gobmk: -DSPEC_CPU_LP64  
456.hammer: -DSPEC_CPU_LP64  
458.sjeng: -DSPEC_CPU_LP64  
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX  
464.h264ref: -DSPEC_CPU_LP64  
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-Mvect=cachesize:6291456 -fastsse -Msmartralloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

C++ benchmarks:

```
-Mvect=cachesize:6291456 -fastsse -Msmartralloc=huge -Mfprelaxed  
--zc_eh -Mipa=fast -Mipa=inline:10 -tp barcelona-32 -Bstatic_pgi
```

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):

pathcc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 21.7

PowerEdge R905 (AMD Opteron 8389, 2.90 GHz)

SPECint_base2006 = 17.9

CPU2006 license: 55

Test date: Feb-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Compiler Invocation (Continued)

456.hmmmer: pgcc

462.libquantum: pgcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2)
               -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
               -L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000
               -IPA:field_reorder=on -LNO:opt=0 -WOPT:if_conv=0
               -CG:local_sched_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast
            -OPT:goto=off -INLINE:aggressive=on -CG:local_sched_alg=1
            -m3dnow
            -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
            -L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=1
          -LNO:trip_count=256 -LNO:prefetch_ahead=10
          -CG:prefer_lru_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
          -CG:gcm=off -GRA:prioritize_by_density=on -m32
          -L/usr/lib -lhugetlbfs
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R905 (AMD Opteron 8389, 2.90 GHz)

SPECint2006 = 21.7

CPU2006 license: 55

Test date: Feb-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Optimization Flags (Continued)

```
445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2)
           -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
           -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict
           -LNO:prefetch=1 -LNO:ignore_feedback=off -CG:p2align=on
```

```
456.hmmr: -Mvect=cachesize:6291456 -fastsse -Mvect=partial
           -Munroll=n:8 -Msmaralloc=huge -Msafeptr -Mprefetch=t0
           -Mfrelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline
           -tp barcelona-64 -Bstatic_pgi
```

```
458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2)
           -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
           -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa
           -LNO:ignore_feedback=off -LNO:full_unroll=10 -LNO:fusion=0
           -LNO:fission=2 -IPA:pu_reorder=2 -CG:ptr_load_use=0
           -OPT:unroll_times_max=8 -INLINE:aggressive=on
```

```
462.libquantum: -Mvect=cachesize:6291456 -fastsse -Munroll=m:8
                -Msmaralloc=huge -Mprefetch=distance:4 -Mfrelaxed
                -Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
                -Bstatic_pgi
```

```
464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
              -fb_opt fbdata(pass 2)
              -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
              -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000
              -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
              -CG:push_pop_int_saved_regs=off -CG:prefer_lru_reg=off
```

C++ benchmarks:

```
471.omnetpp: basepeak = yes
```

```
473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
           -Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse
           -O4 -Msmaralloc=huge -Msafeptr=global -Mfrelaxed
           --zc_eh -tp barcelona-32 -Bstatic_pgi
```

```
483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
                 -L/root/work/libraries/SmartHeap_8.1/lib -lsmartheap
```

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R905 (AMD Opteron 8389, 2.90 GHz)

SPECint2006 = 21.7

CPU2006 license: 55

Test date: Feb-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Other Flags (Continued)

456.hmmer: -Mipa=jobs:4

462.libquantum: -Mipa=jobs:4

C++ benchmarks (except as noted below):

-Mipa=jobs:4(pass 2)

483.xalancbmk: No flags used

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.html

<http://www.spec.org/cpu2006/flags/pathscale32-flags.html>

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.xml

<http://www.spec.org/cpu2006/flags/pathscale32-flags.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 00:05:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 May 2009.