SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX920 S1, Intel Xeon L5506, 2.13 GHz

SPECfp®_rate2006 = 119

SPECfp_rate_base2006 = 114

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Apr-2009
Hardware Availability: May-2009
Software Availability: Feb-2009

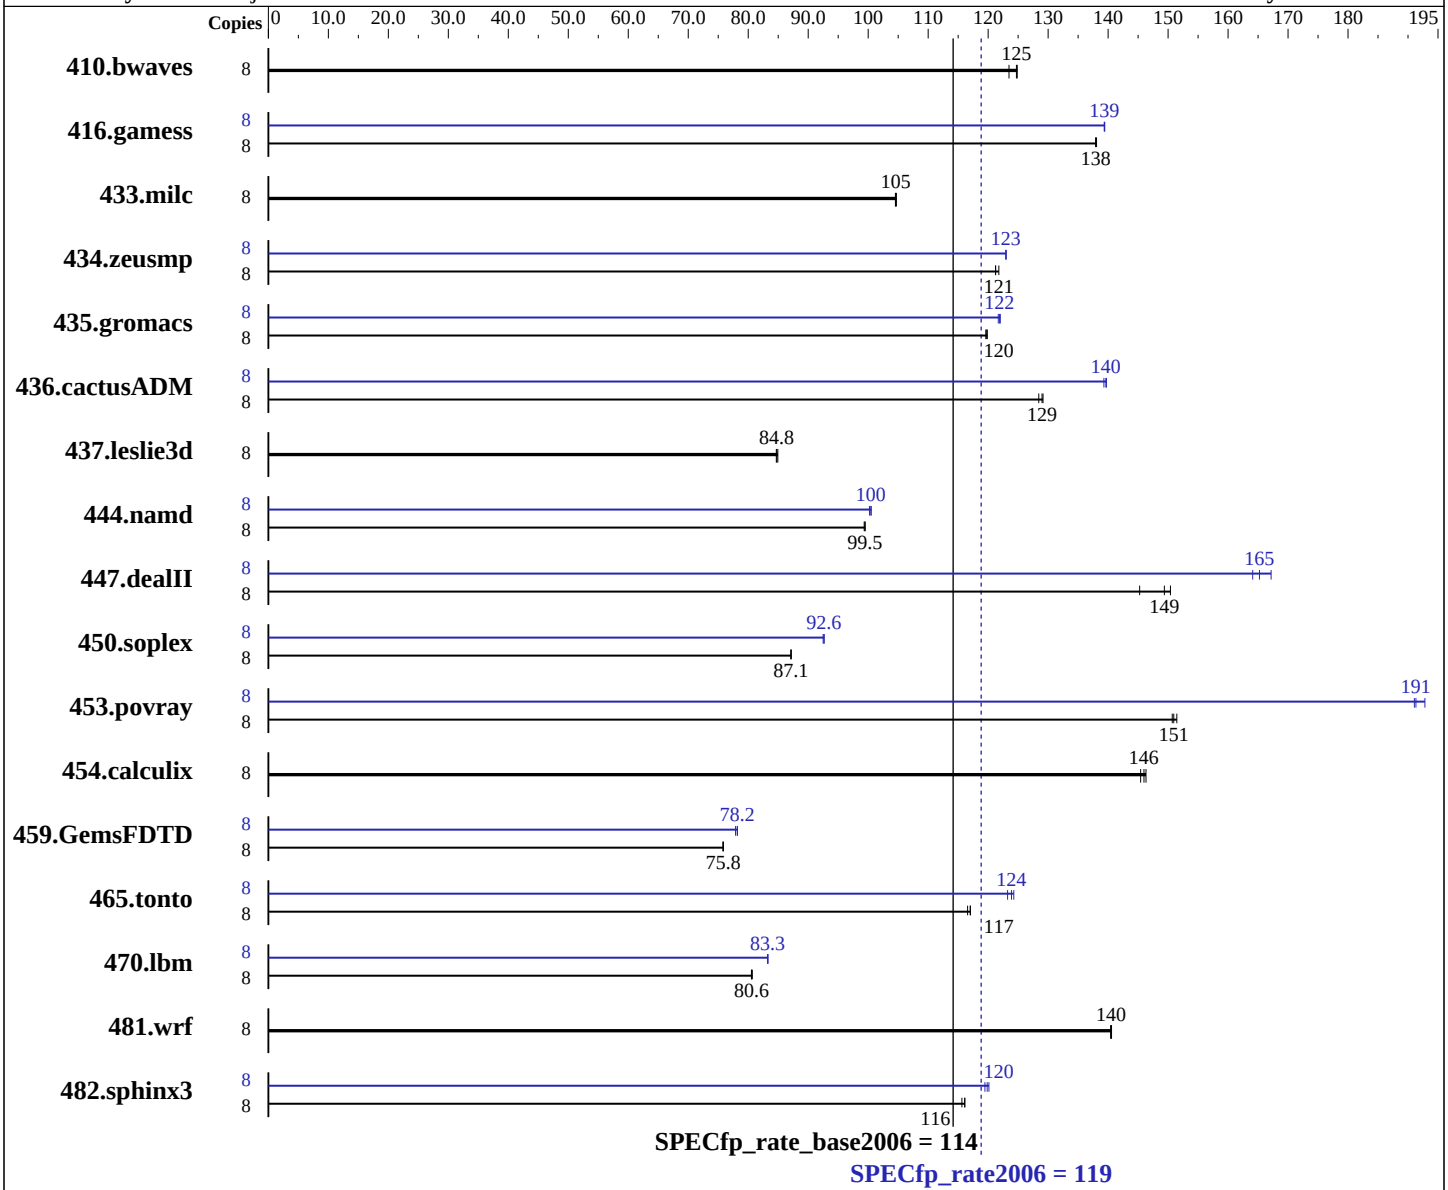

Hardware

CPU Name:	Intel Xeon L5506
CPU Characteristics:	
CPU MHz:	2133
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
Auto Parallel:	No
File System:	ext3
System State:	Multi-User Run Level 3
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX920 S1, Intel Xeon L5506, 2.13 GHz

SPECfp_rate2006 = 119

SPECfp_rate_base2006 = 114

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Apr-2009
Hardware Availability: May-2009
Software Availability: Feb-2009

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 36 GB (9x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)
Disk Subsystem: 1 x SATA, 250 GB, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	880	123	871	125	**872**	**125**	8	880	123	871	125	**872**	**125**
416.gamess	8	1134	138	1136	138	**1135**	**138**	8	**1124**	**139**	1123	139	1124	139
433.milc	8	701	105	**702**	**105**	703	105	8	701	105	**702**	**105**	703	105
434.zeusmp	8	**600**	**121**	598	122	601	121	8	**592**	**123**	592	123	592	123
435.gromacs	8	477	120	**477**	**120**	478	120	8	469	122	**469**	**122**	468	122
436.cactusADM	8	744	128	740	129	**741**	**129**	8	**685**	**140**	684	140	686	139
437.leslie3d	8	885	84.9	888	84.7	**887**	**84.8**	8	885	84.9	888	84.7	**887**	**84.8**
444.namd	8	646	99.3	**645**	**99.5**	645	99.5	8	640	100	**639**	**100**	638	101
447.dealII	8	609	150	**613**	**149**	630	145	8	558	164	**554**	**165**	547	167
450.soplex	8	766	87.2	766	87.1	**766**	**87.1**	8	720	92.6	**720**	**92.6**	721	92.5
453.povray	8	**282**	**151**	281	151	282	151	8	223	191	221	193	**222**	**191**
454.calculix	8	454	145	451	146	**452**	**146**	8	454	145	451	146	**452**	**146**
459.GemsFDTD	8	1119	75.8	**1119**	**75.8**	1120	75.8	8	1085	78.2	1090	77.9	**1086**	**78.2**
465.tonto	8	**673**	**117**	673	117	675	117	8	633	124	639	123	**635**	**124**
470.lbm	8	1362	80.7	**1364**	**80.6**	1365	80.5	8	**1320**	**83.3**	1320	83.3	1320	83.3
481.wrf	8	636	140	636	141	**636**	**140**	8	636	140	636	141	**636**	**140**
482.sphinx3	8	1343	116	**1343**	**116**	1349	116	8	1298	120	1305	119	**1301**	**120**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
```

Platform Notes

```
The system automatically configures the memory to run at 800 MHz.
```

General Notes

For information about Fujitsu please visit: http://www.fujitsu.com

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

433.milc: basepeak = yes

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

436.cactusADM: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -opt-prefetch -auto-ilp32`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:15:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 May 2009.