SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

Proliant DL165 G6
(2.6 GHz AMD Opteron 2435)

SPECfp®_rate2006 = 72.0

SPECfp_rate_base2006 = 65.1

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2009
Hardware Availability: Jun-2009
Software Availability: Apr-2009

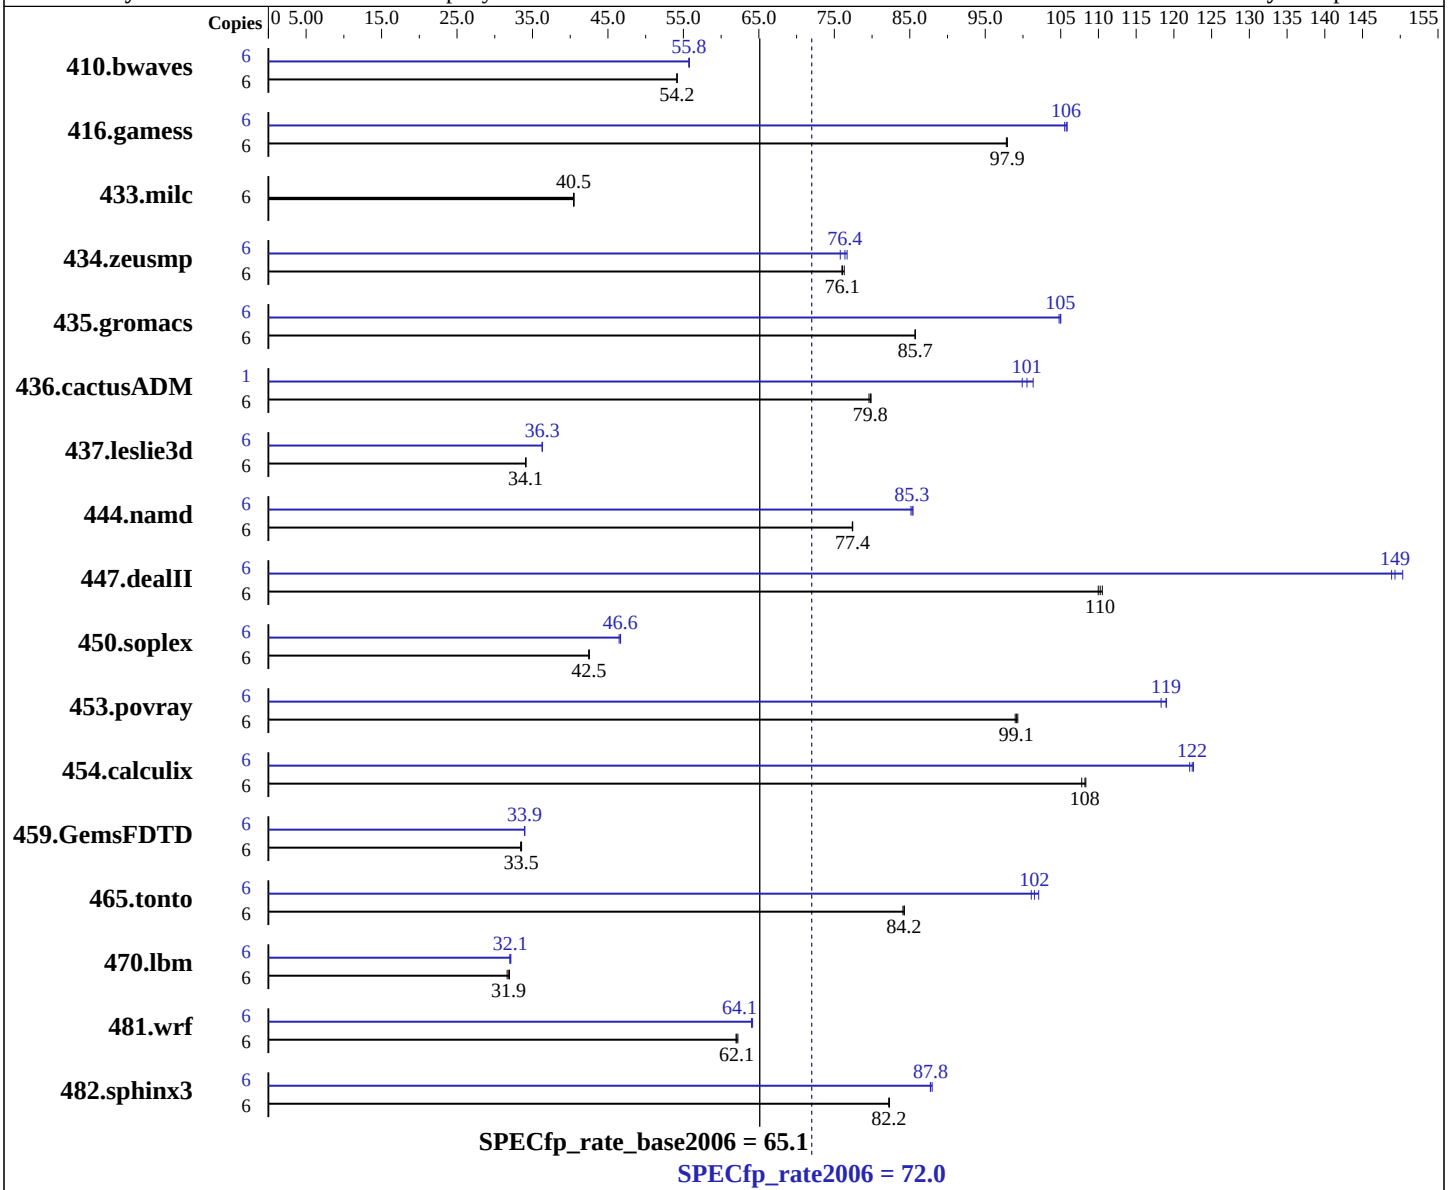

Hardware

CPU Name:	AMD Opteron 2435
CPU Characteristics:	
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	6 cores, 1 chip, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

Proliant DL165 G6
(2.6 GHz AMD Opteron 2435)

SPECfp_rate2006 = 72.0

SPECfp_rate_base2006 = 65.1

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2009
Hardware Availability: Jun-2009
Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (4x4 GB, PC2-6400P CL5)
Disk Subsystem: 1 x 500 GB 5.4 K RPM SATA
Other Hardware: None

Other Software: binutils 2.18

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	6	1506	54.1	**1506**	**54.2**	1505	54.2	6	1461	55.8	**1462**	**55.8**	1464	55.7
416.gamess	6	1201	97.8	1200	97.9	**1200**	**97.9**	6	1110	106	1113	106	**1111**	**106**
433.milc	6	1361	40.5	1360	40.5	**1361**	**40.5**	6	1361	40.5	1360	40.5	**1361**	**40.5**
434.zeusmp	6	715	76.3	718	76.0	**718**	**76.1**	6	**715**	**76.4**	720	75.8	712	76.7
435.gromacs	6	500	85.7	**500**	**85.7**	500	85.8	6	**408**	**105**	409	105	408	105
436.cactusADM	6	**899**	**79.8**	898	79.9	901	79.6	1	**119**	**101**	120	99.9	118	101
437.leslie3d	6	**1653**	**34.1**	1653	34.1	1653	34.1	6	1554	36.3	**1554**	**36.3**	1554	36.3
444.namd	6	621	77.4	**622**	**77.4**	622	77.4	6	565	85.2	563	85.4	**564**	**85.3**
447.dealII	6	621	111	624	110	**623**	**110**	6	461	149	**460**	**149**	457	150
450.soplex	6	1178	42.5	1177	42.5	**1177**	**42.5**	6	1076	46.5	1072	46.7	**1073**	**46.6**
453.povray	6	321	99.3	323	99.0	**322**	**99.1**	6	270	118	**268**	**119**	268	119
454.calculix	6	**457**	**108**	457	108	459	108	6	404	123	**404**	**122**	405	122
459.GemsFDTD	6	**1899**	**33.5**	1904	33.4	1897	33.6	6	**1875**	**33.9**	1873	34.0	1876	33.9
465.tonto	6	**701**	**84.2**	700	84.3	702	84.1	6	**582**	**102**	578	102	584	101
470.lbm	6	**2588**	**31.9**	2605	31.6	2580	32.0	6	2576	32.0	2566	32.1	**2571**	**32.1**
481.wrf	6	1081	62.0	**1080**	**62.1**	1077	62.2	6	1044	64.2	**1046**	**64.1**	1047	64.0
482.sphinx3	6	1421	82.3	1422	82.2	**1422**	**82.2**	6	**1332**	**87.8**	1329	88.0	1333	87.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.
```

Operating System Notes

```
 'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152'  was used to set environment locked pages in memory limit
 The libhugetlbfs libraries were installed using the
 installation rpms that came with the distribution.

 Set vm/nr_hugepages=2700 in /etc/sysctl.conf
 mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

```
BIOS configuration:
  Power Regulator set to Static High Performance Mode
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/cpu2006/amd0905is-libs/64:/cpu2006/amd0905is-libs/32"
NCPUS = "6"
PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64.
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Fortran benchmarks:
pgf95

Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page

Base Portability Flags (Continued)

482.sphinx3: `-DSPEC_CPU_LP64`

Base Optimization Flags

C benchmarks:
`-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi`

C++ benchmarks:
`-fastsse -Msmartalloc=huge -Mfprelaxed --zc_eh -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi`

Fortran benchmarks:
`-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi`

Benchmarks using both Fortran and C:
`-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64 -Mvect=short -Bstatic_pgi`

Base Other Flags

C benchmarks:
`-Mipa=jobs:4`

C++ benchmarks:
`-Mipa=jobs:4`

Fortran benchmarks:
`-Mipa=jobs:4`

Benchmarks using both Fortran and C:
`-Mipa=jobs:4`

Peak Compiler Invocation

C benchmarks:
`pgcc`

C++ benchmarks (except as noted below):
`openCC`

444.namd: `pgcpp`

Continued on next page

Peak Compiler Invocation (Continued)

Fortran benchmarks (except as noted below):
openf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):
pgcc pgf95

435.gromacs: opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64
-Bstatic_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
-Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc_eh
-tp shanghai-64 -Bstatic_pgi

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed
-Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0
-Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8
-Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

Continued on next page

Peak Optimization Flags (Continued)

436.cactusADM: `-fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi`

454.calculix: `-Mpfi=indirect`(pass 1) `-Mpfo=indirect`(pass 2) `-Mipa=fast`(pass 2) `-Mipa=inline`(pass 2) `-fastsse -Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre -Mfprelaxed -tp shanghai-64 -Bstatic_pgi`

481.wrf: `-fastsse -Mvect=noaltcode -Msmartalloc=huge -Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi`

Peak Other Flags

C benchmarks:
`-Mipa=jobs:4`(pass 2)

C++ benchmarks:

444.namd: `-Mipa=jobs:4`(pass 2)

Fortran benchmarks:

410.bwaves: `-Mipa=jobs:4`

434.zeusmp: `-Mipa=jobs:4`

437.leslie3d: `-Mipa=jobs:4`(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: `-Mipa=jobs:4`

454.calculix: `-Mipa=jobs:4`(pass 2)

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.00.html
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.00.xml
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:13:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 June 2009.