SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R905 (AMD Opteron 8435, 2.60 GHz)

SPECfp®_rate2006 = 272

SPECfp_rate_base2006 = 247

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2009
Hardware Availability: Jul-2009
Software Availability: Apr-2009

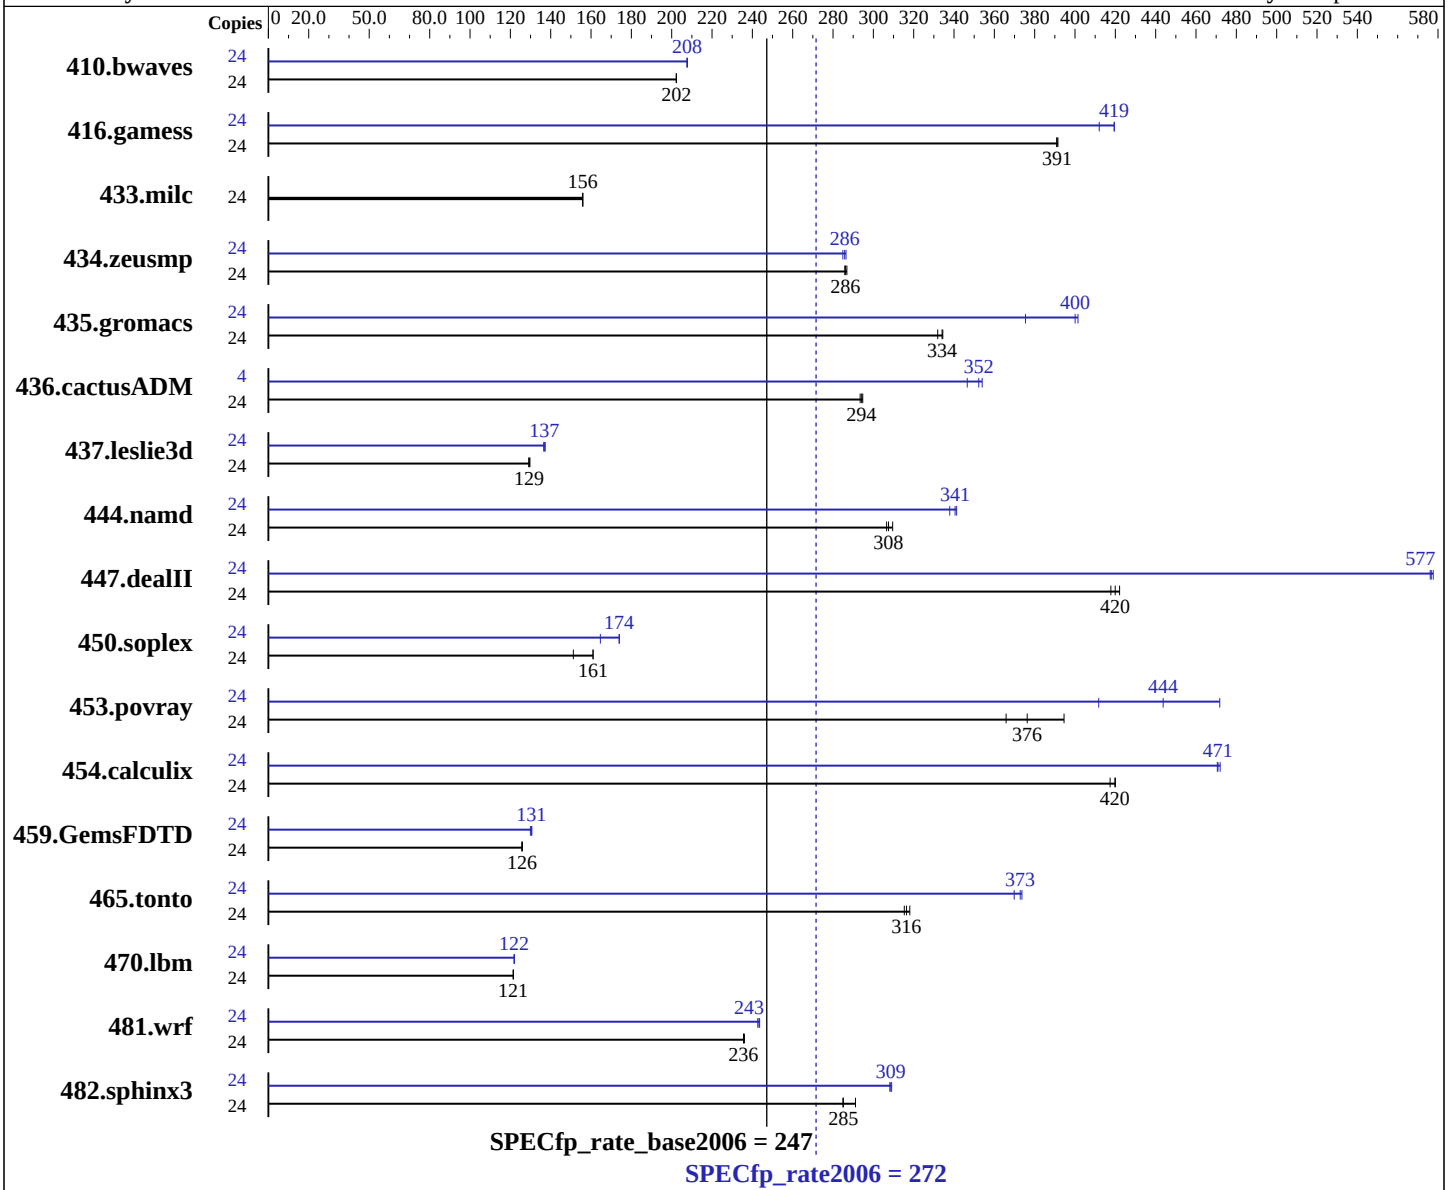

Hardware

CPU Name:	AMD Opteron 8435
CPU Characteristics:	
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	24 cores, 4 chips, 6 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R905 (AMD Opteron 8435, 2.60 GHz)

SPECfp_rate2006 = 272

SPECfp_rate_base2006 = 247

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2009
Hardware Availability: Jul-2009
Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (16 x 4 GB DDR2-800)
Disk Subsystem: 1 x 73 GB 15000 RPM SAS
Other Hardware: None

Other Software: binutils 2.18

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1613	202	1612	202	**1612**	**202**	24	**1571**	**208**	1569	208	1571	208
416.gamess	24	1202	391	**1202**	**391**	1200	392	24	1120	419	1141	412	**1120**	**419**
433.milc	24	1413	156	1414	156	**1413**	**156**	24	1413	156	1414	156	**1413**	**156**
434.zeusmp	24	764	286	761	287	**763**	**286**	24	**764**	**286**	767	285	762	286
435.gromacs	24	516	332	512	334	**513**	**334**	24	**428**	**400**	456	375	427	401
436.cactusADM	24	973	295	**975**	**294**	977	293	4	138	347	**136**	**352**	135	354
437.leslie3d	24	**1744**	**129**	1739	130	1748	129	24	1644	137	1653	137	**1647**	**137**
444.namd	24	628	307	**626**	**308**	622	310	24	570	338	**565**	**341**	564	341
447.dealII	24	657	418	**654**	**420**	650	422	24	475	578	**476**	**577**	477	576
450.soplex	24	1324	151	**1243**	**161**	1243	161	24	1216	165	**1151**	**174**	1150	174
453.povray	24	**339**	**376**	349	366	324	395	24	**288**	**444**	310	412	271	472
454.calculix	24	474	417	**472**	**420**	471	420	24	421	471	420	472	**420**	**471**
459.GemsFDTD	24	2025	126	**2025**	**126**	2022	126	24	1960	130	1949	131	**1951**	**131**
465.tonto	24	749	315	742	318	**746**	**316**	24	**633**	**373**	639	370	632	374
470.lbm	24	2716	121	**2715**	**121**	2714	121	24	2703	122	2706	122	**2705**	**122**
481.wrf	24	1138	236	1136	236	**1138**	**236**	24	1100	244	**1102**	**243**	1105	243
482.sphinx3	24	**1640**	**285**	1607	291	1642	285	24	1513	309	1518	308	**1515**	**309**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.
```

Operating System Notes

```
 'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152'  was used to set environment locked pages in memory limit

 Set vm/nr_hugepages=10800 in /etc/sysctl.conf
 mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd0905is-libs/64:/root/cpu2006-1.1/amd0905is-libs/32"
NCPUS = "6"
PGI_HUGE_PAGES = "450"
The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Fortran benchmarks:
pgf95

Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Bstatic_pgi

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-fastsse -Msmartalloc=huge -Mfprelaxed --zc_eh -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi`

Fortran benchmarks:
`-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi`

Benchmarks using both Fortran and C:
`-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64 -Mvect=short -Bstatic_pgi`

Base Other Flags

C benchmarks:
`-Mipa=jobs:4`

C++ benchmarks:
`-Mipa=jobs:4`

Fortran benchmarks:
`-Mipa=jobs:4`

Benchmarks using both Fortran and C:
`-Mipa=jobs:4`

Peak Compiler Invocation

C benchmarks:
`pgcc`

C++ benchmarks (except as noted below):
`openCC`

444.namd: `pgcpp`

Fortran benchmarks (except as noted below):
`openf95`

410.bwaves: `pgf95`

434.zeusmp: `pgf95`

Continued on next page

Peak Compiler Invocation (Continued)

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):
pgcc pgf95

435.gromacs: opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64
-Bstatic_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
-Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc_eh
-tp shanghai-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed
-Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0
-Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8
-Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre
-Mfprelaxed -tp shanghai-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `-fastsse -Mvect=noaltcode -Msmartalloc=huge -Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi`

Peak Other Flags

C benchmarks:
`-Mipa=jobs:4`(pass 2)

C++ benchmarks:

444.namd: `-Mipa=jobs:4`(pass 2)

Fortran benchmarks:

410.bwaves: `-Mipa=jobs:4`

434.zeusmp: `-Mipa=jobs:4`

437.leslie3d: `-Mipa=jobs:4`(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: `-Mipa=jobs:4`

454.calculix: `-Mipa=jobs:4`(pass 2)

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.html
http://www.spec.org/cpu2006/flags/amd-platform.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.xml
http://www.spec.org/cpu2006/flags/amd-platform.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R905 (AMD Opteron 8435, 2.60 GHz)

SPECfp_rate2006 = 272

SPECfp_rate_base2006 = 247

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2009
Hardware Availability: Jul-2009
Software Availability: Apr-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:10:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 June 2009.