SPEC® CFP2006 Result

Hewlett-Packard Company

ProLiant DL385 G6
(2.6 GHz AMD Opteron 2435)

SPECfp®_rate2006 = 141

SPECfp_rate_base2006 = 127

CPU2006 license:	3	**Test date:**	May-2009
Test sponsor:	Hewlett-Packard Company	**Hardware Availability:**	Jun-2009
Tested by:	Hewlett-Packard Company	**Software Availability:**	Apr-2009

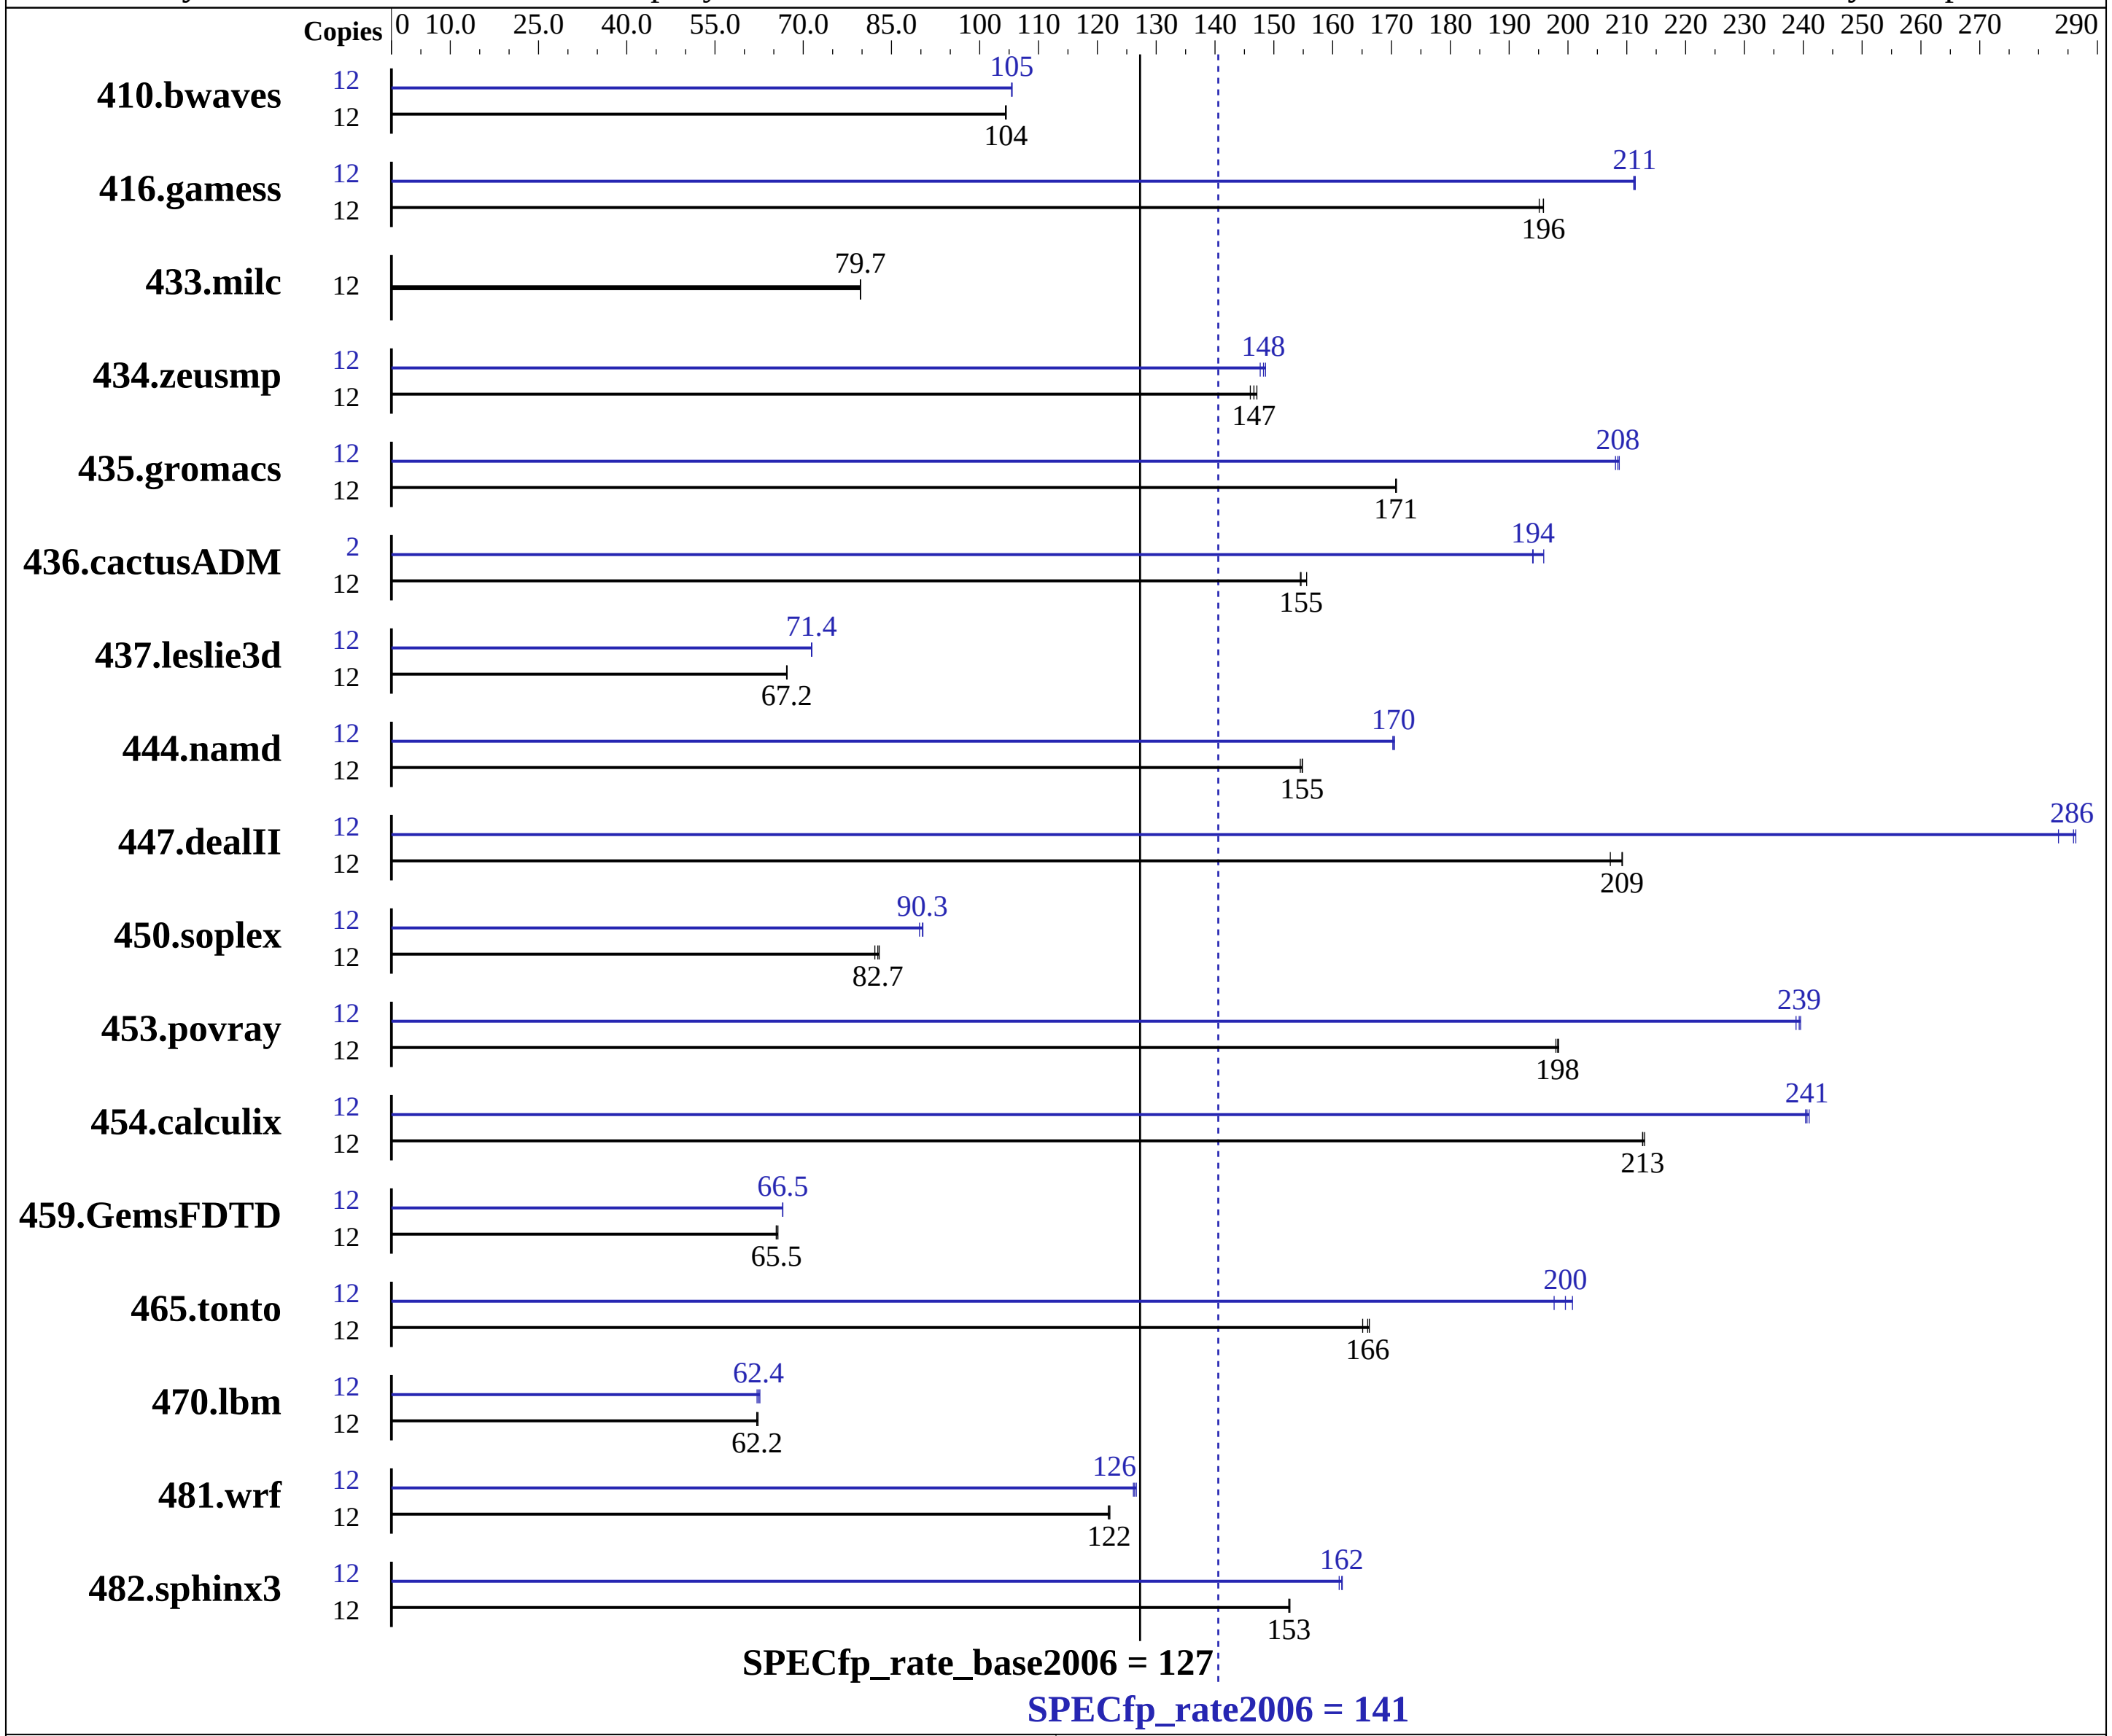

Hardware

CPU Name:	AMD Opteron 2435
CPU Characteristics:	
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Hewlett-Packard Company

ProLiant DL385 G6
(2.6 GHz AMD Opteron 2435)

SPECfp_rate2006 = 141

SPECfp_rate_base2006 = 127

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company
Test date: May-2009
Hardware Availability: Jun-2009
Software Availability: Apr-2009

L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (8x4 GB, PC2-6400P CL5)
Disk Subsystem:	1 x 120 GB SFF SATA, 5400 RPM
Other Hardware:	None

Other Software: binutils 2.18

Results Table

	Base							Peak						
Benchmark	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
410.bwaves	12	**1561**	**104**	1562	104	1561	104	12	1547	105	**1546**	**105**	1546	106
416.gamess	12	**1200**	**196**	1200	196	1204	195	12	1113	211	1111	211	**1112**	**211**
433.milc	12	**1382**	**79.7**	1382	79.7	1382	79.7	12	**1382**	**79.7**	1382	79.7	1382	79.7
434.zeusmp	12	748	146	**745**	**147**	742	147	12	739	148	**737**	**148**	735	149
435.gromacs	12	**502**	**171**	501	171	502	171	12	411	209	**411**	**208**	412	208
436.cactusADM	12	922	156	**927**	**155**	928	155	2	122	196	123	194	**123**	**194**
437.leslie3d	12	1677	67.3	**1679**	**67.2**	1679	67.2	12	**1579**	**71.4**	1580	71.4	1578	71.5
444.namd	12	621	155	623	154	**622**	**155**	12	565	170	**565**	**170**	564	171
447.dealII	12	663	207	656	209	**656**	**209**	12	**480**	**286**	484	283	479	286
450.soplex	12	1218	82.2	**1210**	**82.7**	1207	82.9	12	1115	89.8	**1109**	**90.3**	1108	90.3
453.povray	12	**322**	**198**	322	198	323	198	12	267	239	**267**	**239**	267	240
454.calculix	12	465	213	465	213	**465**	**213**	12	411	241	412	240	**411**	**241**
459.GemsFDTD	12	1947	65.4	**1945**	**65.5**	1938	65.7	12	1914	66.5	**1914**	**66.5**	1914	66.5
465.tonto	12	710	166	715	165	**711**	**166**	12	588	201	597	198	**592**	**200**
470.lbm	12	**2653**	**62.2**	2655	62.1	2646	62.3	12	**2641**	**62.4**	2633	62.6	2653	62.2
481.wrf	12	**1099**	**122**	1100	122	1098	122	12	**1061**	**126**	1059	127	1063	126
482.sphinx3	12	1533	153	**1533**	**153**	1531	153	12	1452	161	1447	162	**1448**	**162**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores
 See the configuration file for details.
```

Operating System Notes

```
 'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152'  was used to set environment locked pages in memory limit

 Set vm/nr_hugepages=5400 in /etc/sysctl.conf
 mount -t hugetlbfs nodev /mnt/hugepages
```

Hewlett-Packard Company

ProLiant DL385 G6
(2.6 GHz AMD Opteron 2435)

SPECfp_rate2006 = 141

SPECfp_rate_base2006 = 127

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2009
Hardware Availability: Jun-2009
Software Availability: Apr-2009

Platform Notes

```
BIOS configuration:
  Power Regulator set to HP Static High Performance Mode
  Memory channel mode set to Independent
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/cpu2006/amd0905is-libs/64:/cpu2006/amd0905is-libs/32"
NCPUS = "6"
PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64.
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Fortran benchmarks:
pgf95

Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

C++ benchmarks:
-fastsse -Msmartalloc=huge -Mfprelaxed --zc_eh -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

Fortran benchmarks:
-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

Benchmarks using both Fortran and C:
-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64 -Mvect=short -Bstatic_pgi

Base Other Flags

C benchmarks:
-Mipa=jobs:4

C++ benchmarks:
-Mipa=jobs:4

Fortran benchmarks:
-Mipa=jobs:4

Benchmarks using both Fortran and C:
-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks (except as noted below):
openCC

Continued on next page

Peak Compiler Invocation (Continued)

444.namd: `pgcpp`

Fortran benchmarks (except as noted below):
`openf95`

410.bwaves: `pgf95`

434.zeusmp: `pgf95`

437.leslie3d: `pgf95`

Benchmarks using both Fortran and C (except as noted below):
`pgcc pgf95`

435.gromacs: `opencc openf95`

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32 -Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2) -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse -Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc_eh -tp shanghai-64 -Bstatic_pgi

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on -LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll_times_max=8 -OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on -OPT:malloc_alg=1 -CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on -HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2) -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse -Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2 -LNO:prefetch_ahead=1 -CG:load_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

Continued on next page

Peak Optimization Flags (Continued)

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2) -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse -Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre -Mfprelaxed -tp shanghai-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc=huge -Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi

Peak Other Flags

C benchmarks:
-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.html
http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.00.html
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.xml
http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.00.xml
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:06:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 June 2009.