



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint®2006 = 21.4

Intel DQ45CB motherboard (Intel Core 2 Duo E7200)

SPECint_base2006 = 19.6

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Apr-2009

Hardware Availability: May-2009

Software Availability: Nov-2008

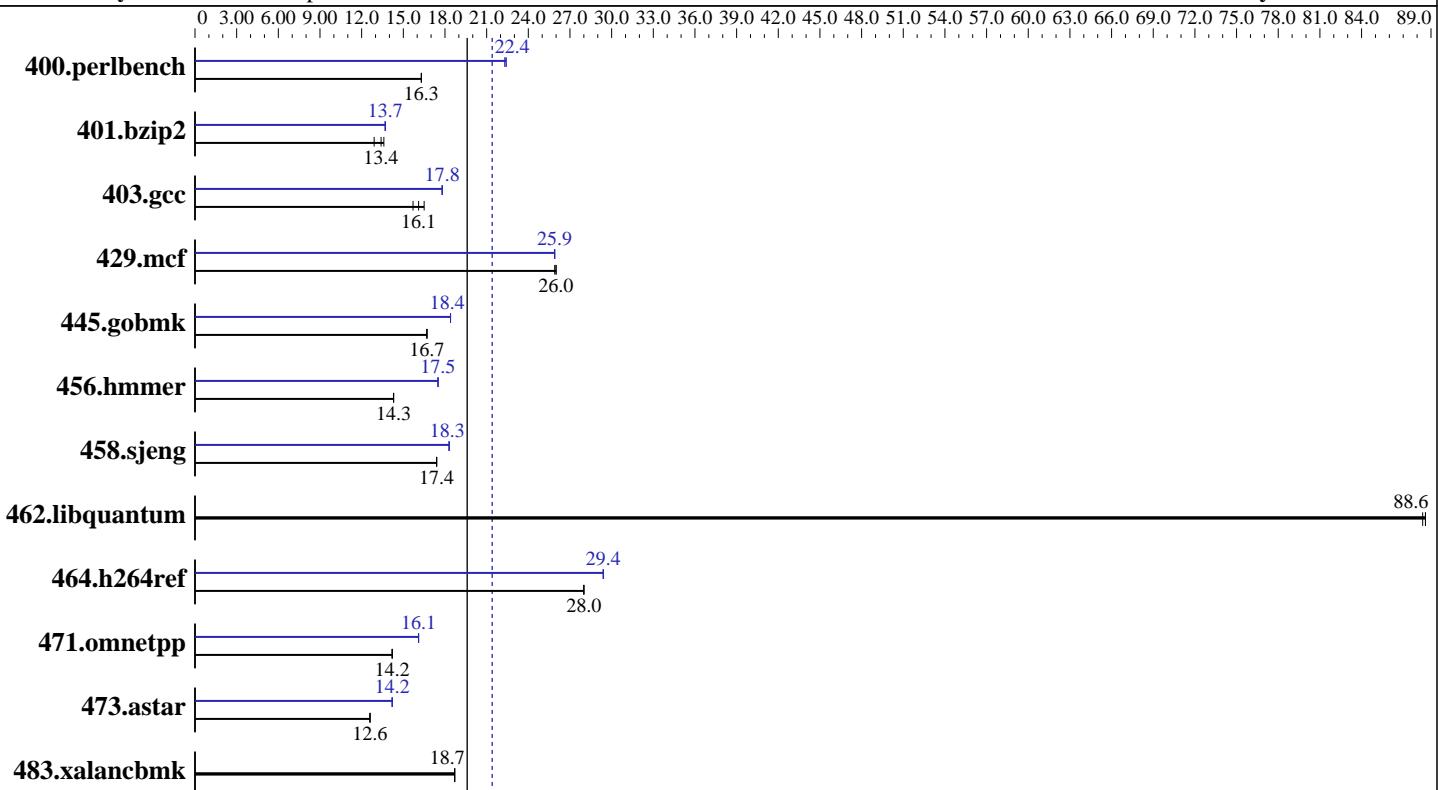

Hardware

CPU Name: Intel Core 2 Duo E7200
CPU Characteristics:
CPU MHz: 2533
FPU: Integrated
CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 3 MB I+D on chip per chip
L3 Cache: None
Other Cache: None
Memory: 4 GB (4x1GB DDR2-800 CL5)
Disk Subsystem: Seagate 320 GB SATA, 7200RPM
Other Hardware: None

Software

Operating System: Windows Vista Ultimate w/ SP1 (64-bit)
Compiler: Intel C++ Compiler Professional 11.0 for IA32 Build 20080930 Package ID: w_cproc_p_11.0.054 Microsoft Visual Studio 2008 (for libraries)
Auto Parallel: Yes
File System: NTFS
System State: Default
Base Pointers: 32-bit
Peak Pointers: 32-bit
Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 21.4

Intel DQ45CB motherboard (Intel Core 2 Duo E7200)

SPECint_base2006 = 19.6

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
400.perlbench	601	16.3	600	16.3	601	16.3	437	22.4	437	22.4	437	22.3
401.bzip2	718	13.4	746	12.9	709	13.6	706	13.7	706	13.7	703	13.7
403.gcc	500	16.1	487	16.5	514	15.7	452	17.8	453	17.8	452	17.8
429.mcf	352	25.9	351	26.0	351	26.0	352	25.9	352	25.9	352	25.9
445.gobmk	628	16.7	628	16.7	628	16.7	569	18.4	569	18.4	569	18.4
456.hammer	652	14.3	652	14.3	652	14.3	534	17.5	534	17.5	534	17.5
458.sjeng	695	17.4	695	17.4	695	17.4	662	18.3	662	18.3	662	18.3
462.libquantum	234	88.4	234	88.6	234	88.6	234	88.4	234	88.6	234	88.6
464.h264ref	792	28.0	791	28.0	791	28.0	753	29.4	754	29.4	754	29.4
471.omnetpp	441	14.2	441	14.2	441	14.2	389	16.1	388	16.1	388	16.1
473.astar	556	12.6	556	12.6	556	12.6	496	14.2	496	14.2	496	14.2
483.xalancbmk	370	18.7	369	18.7	370	18.7	370	18.7	369	18.7	370	18.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with Shin-G ATX case,
Antec Truepower Trio power supply TP3-650

Binaries were built on Windows Vista Ultimate (32-bit)

Binaries were built on Windows Vista Ultimate (32-bit)

OMP_NUM_THREADS set to number of logical processors as seen by the OS
KMP_AFFINITY set to physical,0

Base Compiler Invocation

C benchmarks:
 icl -Qvc9 -Qc99

C++ benchmarks:
 icl -Qvc9

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32

464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ45CB motherboard (Intel Core 2 Duo E7200)

SPECint2006 = 21.4

SPECint_base2006 = 19.6

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Apr-2009

Hardware Availability: May-2009

Software Availability: Nov-2008

Base Optimization Flags

C benchmarks:

```
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel  
-Qpar-runtime-control -Qvec-guard-write /F512000000
```

C++ benchmarks:

```
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qc99
```

C++ benchmarks:

```
icl -Qvc9
```

Peak Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
```

```
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
```

```
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE
```

```
401.bzip2: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias  
/F512000000
```

```
403.gcc: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)  
-Qipo -O3 -Qprec-div- /F512000000
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 21.4

Intel DQ45CB motherboard (Intel Core 2 Duo E7200)

SPECint_base2006 = 19.6

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

429.mcf: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

445.gobmk: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmr: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qunroll12 -Qansi-alias
/F512000000

458.sjeng: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll14 /F512000000

462.libquantum: basepeak = yes

464.h264ref: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll12 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F5120000000 shlw32m.lib
-link /FORCE:MULTIPLE

473.astar: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=routine /F5120000000 shlw32m.lib
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gnu: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ45CB motherboard (Intel Core 2 Duo E7200)

SPECint2006 = 21.4

SPECint_base2006 = 19.6

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Apr-2009

Hardware Availability: May-2009

Software Availability: Nov-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 01:12:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 June 2009.