SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom II X4 940)

SPECfp®_rate2006 = 42.4

SPECfp_rate_base2006 = 41.6

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: May-2009
Hardware Availability: Jan-2009
Software Availability: Nov-2008

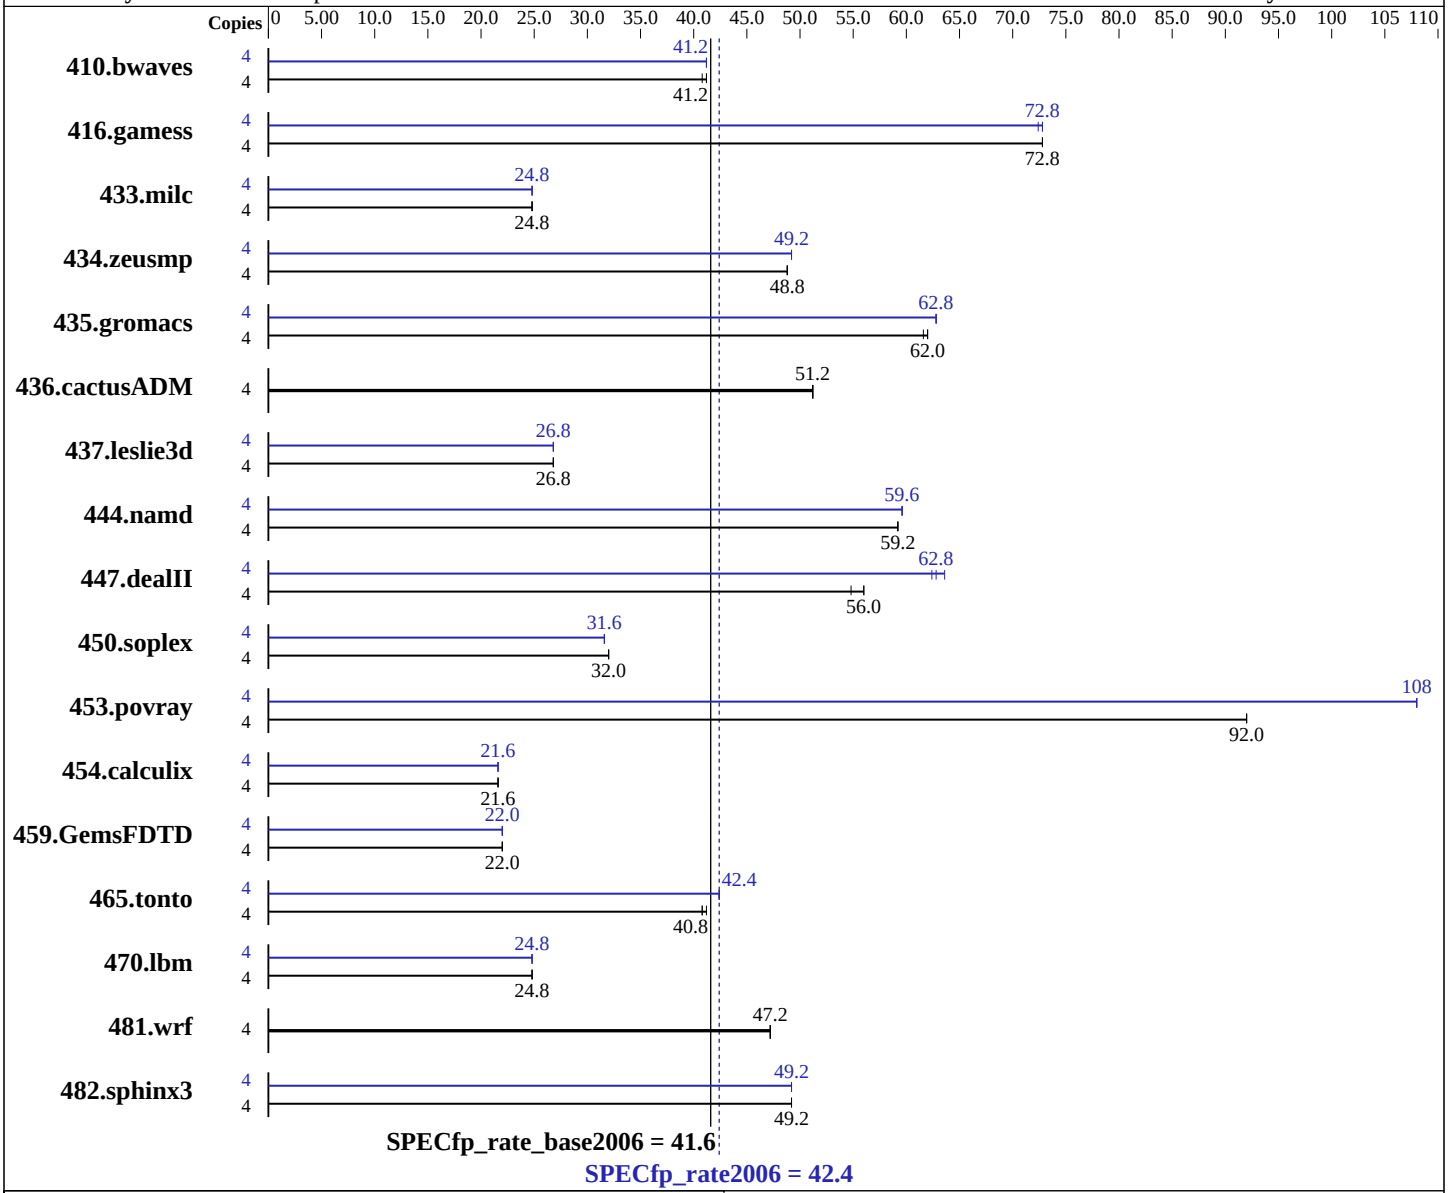

Hardware

CPU Name:	AMD Phenom II X4 940
CPU Characteristics:	
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	Windows Vista Ultimate w/ SP1 (64-bit)
Compiler:	Intel C++ Compiler Professional 11.0 for IA32 Build 20080930 Package ID: w_cproc_p_11.0.054 Intel Visual Fortran Compiler Professional 11.0 for IA32 Build 20080930 Package ID: w_cprof_p_11.0.054 Microsoft Visual Studio 2008 (for libraries)
Auto Parallel:	No
File System:	NTFS

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom II X4 940)

SPECfp_rate2006 = 42.4

SPECfp_rate_base2006 = 41.6

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: May-2009
Hardware Availability: Jan-2009
Software Availability: Nov-2008

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 4 GB (4x1GB DDR2-800 CL5)
Disk Subsystem: Seagate 320 GB SATA, 7200RPM
Other Hardware: None

System State: Default
Base Pointers: 32-bit
Peak Pointers: 32-bit
Other Software: SmartHeap Library Version 8.1 from http://www.microquill.com/

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1326	40.8	1316	41.2	**1317**	**41.2**	4	1318	41.2	**1316**	**41.2**	1316	41.2
416.gamess	4	**1076**	**72.8**	1076	72.8	1076	72.8	4	1079	72.8	**1079**	**72.8**	1079	72.4
433.milc	4	1481	24.8	1482	24.8	**1482**	**24.8**	4	1478	24.8	1479	24.8	**1478**	**24.8**
434.zeusmp	4	746	48.8	**744**	**48.8**	743	48.8	4	740	49.2	**741**	**49.2**	742	49.2
435.gromacs	4	462	62.0	463	61.6	**462**	**62.0**	4	**455**	**62.8**	456	62.8	455	62.8
436.cactusADM	4	931	51.2	932	51.2	**931**	**51.2**	4	931	51.2	932	51.2	**931**	**51.2**
437.leslie3d	4	**1411**	**26.8**	1411	26.8	1410	26.8	4	1411	26.8	**1411**	**26.8**	1411	26.8
444.namd	4	542	59.2	**542**	**59.2**	542	59.2	4	**540**	**59.6**	540	59.6	539	59.6
447.dealII	4	**817**	**56.0**	833	54.8	815	56.0	4	**729**	**62.8**	721	63.6	731	62.4
450.soplex	4	1046	32.0	**1041**	**32.0**	1040	32.0	4	1053	31.6	1050	31.6	**1052**	**31.6**
453.povray	4	231	92.0	**231**	**92.0**	232	92.0	4	197	108	**197**	**108**	197	108
454.calculix	4	1541	21.6	1540	21.6	**1541**	**21.6**	4	1541	21.6	1541	21.6	**1541**	**21.6**
459.GemsFDTD	4	1942	22.0	1943	22.0	**1942**	**22.0**	4	1944	22.0	**1944**	**22.0**	1944	22.0
465.tonto	4	963	40.8	**962**	**40.8**	960	41.2	4	932	42.4	**929**	**42.4**	926	42.4
470.lbm	4	**2222**	**24.8**	2222	24.8	2222	24.8	4	2222	24.8	**2222**	**24.8**	2222	24.8
481.wrf	4	945	47.2	943	47.2	**943**	**47.2**	4	945	47.2	943	47.2	**943**	**47.2**
482.sphinx3	4	1583	49.2	1587	49.2	**1584**	**49.2**	4	1586	49.2	**1586**	**49.2**	1582	49.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

General Notes

```
Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Binaries were built on Windows Vista Ultimate (32-bit)
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qc99
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
```
icl -Qvc9
```

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icl -Qvc9 -Qc99 ifort
```

Base Portability Flags

436.cactusADM: `-Qlowercase /assume:underscore`
444.namd: `-TP`
447.dealII: `-DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG`
453.povray: `-DSPEC_CPU_WINDOWS_ICL`
454.calculix: `-DSPEC_CPU_NOZMODIFIER -Qlowercase`
481.wrf: `-DSPEC_CPU_WINDOWS_ICL`

Base Optimization Flags

C benchmarks:
```
/arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000
```

C++ benchmarks:
```
/arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F1000000000 shlw32m.lib            -link /FORCE:MULTIPLE
```

Fortran benchmarks:
```
/arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000
```

Benchmarks using both Fortran and C:
```
/arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000
```

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc9 -Qc99
```

C++ benchmarks:
```
icl -Qvc9
```

Fortran benchmarks:
```
ifort
```

Continued on next page

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icl -Qvc9 -Qc99 ifort

Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Peak Optimization Flags

C benchmarks:

433.milc: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa /F1000000000

470.lbm: /arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F1000000000

482.sphinx3: /arch:SSE2 -Qipo -O3 -Qprec-div- -Qunroll2 /F1000000000

C++ benchmarks:

444.namd: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

447.dealII: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
-Qscalar-rep- /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

450.soplex: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

453.povray: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias /F1000000000
shlw32m.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves: /arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

416.gamess: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep- /F1000000000

434.zeusmp: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- /F1000000000

437.leslie3d: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

459.GemsFDTD: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qopt-prefetch /F1000000000

465.tonto: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

436.cactusADM: basepeak = yes

454.calculix: /arch:SSE2 -Qipo -O3 -Qprec-div- /F1000000000

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:19:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 June 2009.