SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom X3 8750)

SPECfp®_rate2006 = 29.6

SPECfp_rate_base2006 = 28.9

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jan-2009
Hardware Availability: Apr-2008
Software Availability: Nov-2008

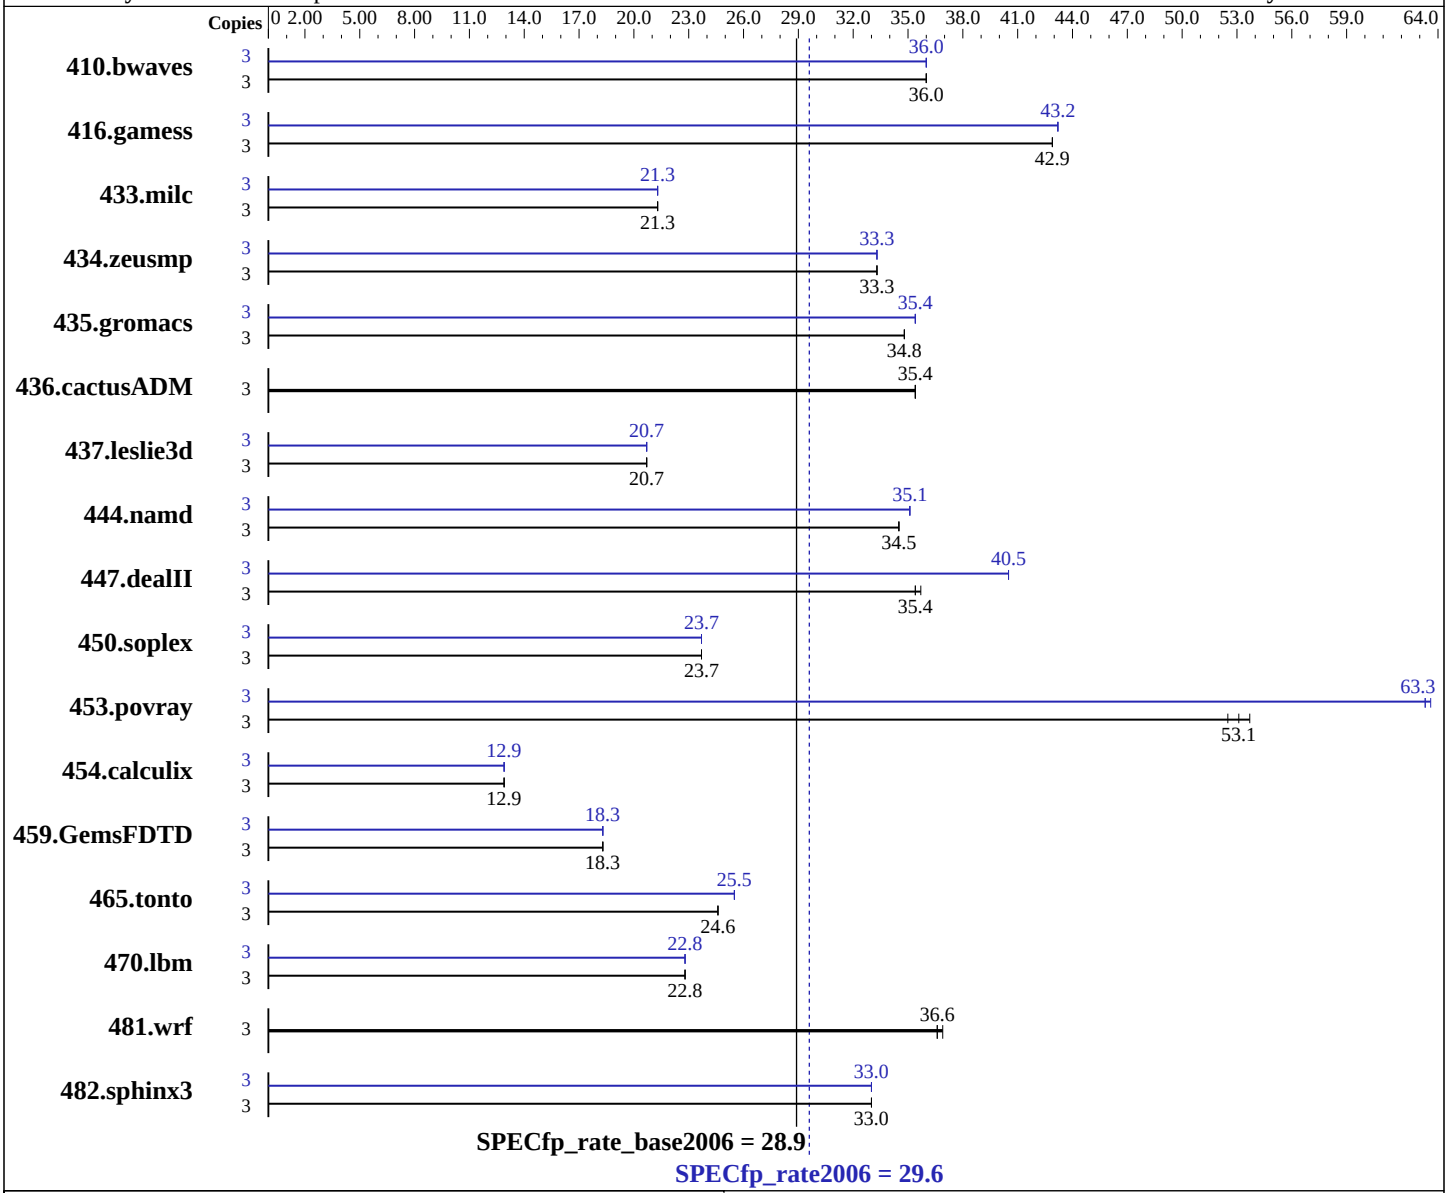

Hardware

CPU Name:	AMD Phenom X3 8750
CPU Characteristics:	
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	3 cores, 1 chip, 3 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	Windows Vista Ultimate w/ SP1 (64-bit)
Compiler:	Intel C++ Compiler Professional 11.0 for IA32 Build 20080930 Package ID: w_cproc_p_11.0.054 Intel Visual Fortran Compiler Professional 11.0 for IA32 Build 20080930 Package ID: w_cprof_p_11.0.054 Microsoft Visual Studio 2008 (for libraries)
Auto Parallel:	No
File System:	NTFS

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.
(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom X3 8750)

SPECfp_rate2006 = 29.6

SPECfp_rate_base2006 = 28.9

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jan-2009
Hardware Availability: Apr-2008
Software Availability: Nov-2008

L3 Cache: 2 MB I+D on chip per chip
Other Cache: None
Memory: 4 GB (4x1GB DDR2-800 CL5)
Disk Subsystem: Seagate 320 GB SATA, 7200RPM
Other Hardware: None

System State: Default
Base Pointers: 32-bit
Peak Pointers: 32-bit
Other Software: SmartHeap Library Version 8.1 from http://www.microquill.com/

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	3	1135	36.0	**1136**	**36.0**	1136	36.0	3	1135	36.0	1135	36.0	**1135**	**36.0**
416.gamess	3	1367	42.9	1366	42.9	**1366**	**42.9**	3	**1363**	**43.2**	1363	43.2	1363	43.2
433.milc	3	1285	21.3	1287	21.3	**1286**	**21.3**	3	1287	21.3	**1286**	**21.3**	1286	21.3
434.zeusmp	3	**821**	**33.3**	820	33.3	821	33.3	3	816	33.3	817	33.3	**817**	**33.3**
435.gromacs	3	**618**	**34.8**	618	34.8	618	34.8	3	607	35.4	**607**	**35.4**	607	35.4
436.cactusADM	3	**1015**	**35.4**	1014	35.4	1016	35.4	3	**1015**	**35.4**	1014	35.4	1016	35.4
437.leslie3d	3	1354	20.7	1355	20.7	**1354**	**20.7**	3	1353	20.7	**1353**	**20.7**	1353	20.7
444.namd	3	**697**	**34.5**	696	34.5	697	34.5	3	**685**	**35.1**	685	35.1	685	35.1
447.dealII	3	**969**	**35.4**	969	35.4	965	35.7	3	847	40.5	**847**	**40.5**	846	40.5
450.soplex	3	**1059**	**23.7**	1058	23.7	1060	23.7	3	**1059**	**23.7**	1059	23.7	1059	23.7
453.povray	3	**301**	**53.1**	304	52.5	297	53.7	3	251	63.6	**252**	**63.3**	252	63.3
454.calculix	3	1908	12.9	1908	12.9	**1908**	**12.9**	3	1908	12.9	**1908**	**12.9**	1908	12.9
459.GemsFDTD	3	**1745**	**18.3**	1745	18.3	1746	18.3	3	1746	18.3	**1746**	**18.3**	1748	18.3
465.tonto	3	**1195**	**24.6**	1197	24.6	1195	24.6	3	1156	25.5	**1154**	**25.5**	1151	25.5
470.lbm	3	1797	22.8	1797	22.8	**1797**	**22.8**	3	1797	22.8	1796	22.8	**1796**	**22.8**
481.wrf	3	**913**	**36.6**	914	36.6	909	36.9	3	**913**	**36.6**	914	36.6	909	36.9
482.sphinx3	3	**1776**	**33.0**	1776	33.0	1773	33.0	3	1778	33.0	**1778**	**33.0**	1779	33.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

General Notes

```
Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Binaries were built on Windows Vista Ultimate (32-bit)
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qc99
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
```
icl -Qvc9
```

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icl -Qvc9 -Qc99 ifort
```

Base Portability Flags

436.cactusADM: `-Qlowercase /assume:underscore`
444.namd: `-TP`
447.dealII: `-DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG`
453.povray: `-DSPEC_CPU_WINDOWS_ICL`
454.calculix: `-DSPEC_CPU_NOZMODIFIER -Qlowercase`
481.wrf: `-DSPEC_CPU_WINDOWS_ICL`

Base Optimization Flags

C benchmarks:
```
/arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000
```

C++ benchmarks:
```
/arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F1000000000 shlw32m.lib            -link /FORCE:MULTIPLE
```

Fortran benchmarks:
```
/arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000
```

Benchmarks using both Fortran and C:
```
/arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000
```

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc9 -Qc99
```

C++ benchmarks:
```
icl -Qvc9
```

Fortran benchmarks:
```
ifort
```

Continued on next page

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icl -Qvc9 -Qc99 ifort

Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Peak Optimization Flags

C benchmarks:

433.milc: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa /F1000000000

470.lbm: /arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F1000000000

482.sphinx3: /arch:SSE2 -Qipo -O3 -Qprec-div- -Qunroll2 /F1000000000

C++ benchmarks:

444.namd: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

447.dealII: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
-Qscalar-rep- /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

450.soplex: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

453.povray: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias /F1000000000
shlw32m.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves: /arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

416.gamess: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep- /F1000000000

434.zeusmp: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- /F1000000000

437.leslie3d: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

459.GemsFDTD: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qopt-prefetch /F1000000000

465.tonto: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

436.cactusADM: basepeak = yes

454.calculix: /arch:SSE2 -Qipo -O3 -Qprec-div- /F1000000000

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:21:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 June 2009.