SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R905 (AMD Opteron 8431, 2.40 GHz)

SPECfp®_rate2006 = 263

SPECfp_rate_base2006 = 240

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2009
Hardware Availability: Jul-2009
Software Availability: Apr-2009

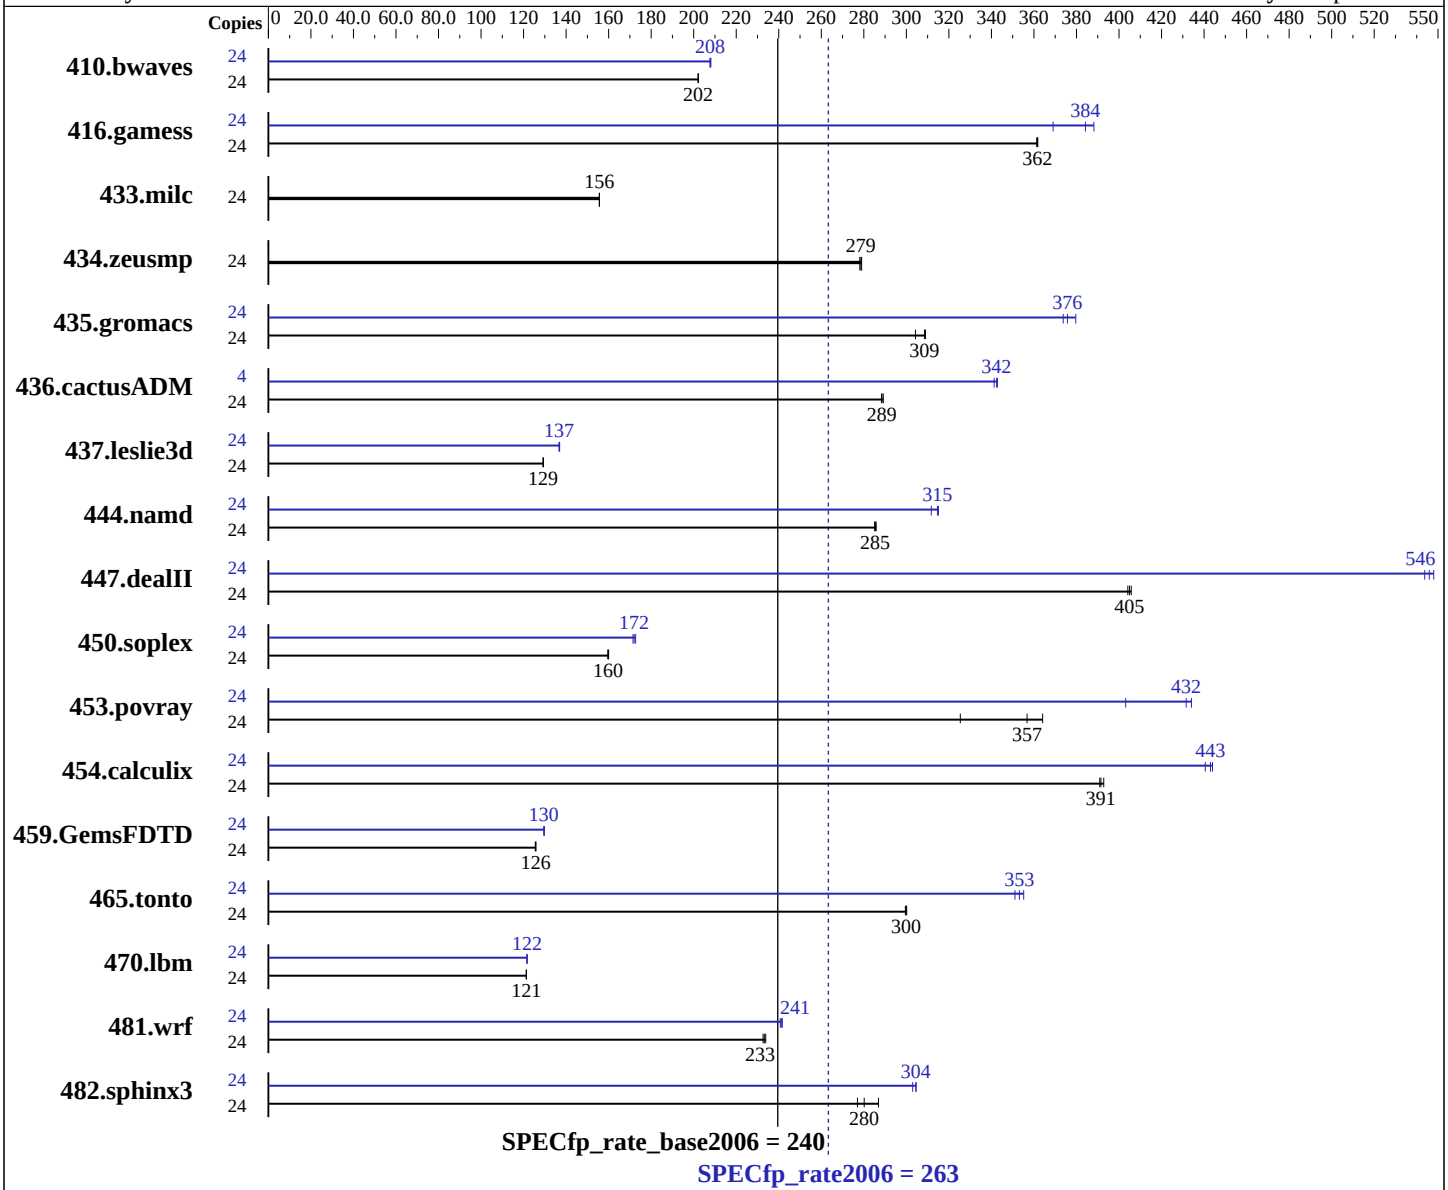

Hardware

CPU Name:	AMD Opteron 8431
CPU Characteristics:	
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	24 cores, 4 chips, 6 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R905 (AMD Opteron 8431, 2.40 GHz)

SPECfp_rate2006 = 263

SPECfp_rate_base2006 = 240

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2009
Hardware Availability: Jul-2009
Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (16 x 4 GB DDR2-800)
Disk Subsystem: 1 x 73 GB 15000 RPM SAS
Other Hardware: None

Other Software: binutils 2.18

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1614	202	**1614**	**202**	1613	202	24	1567	208	**1570**	**208**	1570	208
416.gamess	24	1301	361	**1299**	**362**	1299	362	24	1210	388	**1223**	**384**	1273	369
433.milc	24	1415	156	1416	156	**1415**	**156**	24	1415	156	1416	156	**1415**	**156**
434.zeusmp	24	783	279	785	278	**784**	**279**	24	783	279	785	278	**784**	**279**
435.gromacs	24	555	309	**555**	**309**	563	304	24	458	374	451	380	**456**	**376**
436.cactusADM	24	992	289	**994**	**289**	995	288	4	140	341	**140**	**342**	139	343
437.leslie3d	24	**1746**	**129**	1744	129	1746	129	24	**1650**	**137**	1650	137	1647	137
444.namd	24	675	285	673	286	**674**	**285**	24	617	312	**612**	**315**	611	315
447.dealII	24	677	406	679	404	**678**	**405**	24	501	548	**503**	**546**	505	544
450.soplex	24	1251	160	**1253**	**160**	1254	160	24	**1164**	**172**	1167	171	1159	173
453.povray	24	351	364	**358**	**357**	392	325	24	**296**	**432**	317	403	294	434
454.calculix	24	506	391	504	393	**506**	**391**	24	449	441	**447**	**443**	446	444
459.GemsFDTD	24	**2025**	**126**	2025	126	2029	125	24	1963	130	**1965**	**130**	1965	130
465.tonto	24	788	300	787	300	**788**	**300**	24	665	355	673	351	**669**	**353**
470.lbm	24	2718	121	2719	121	**2718**	**121**	24	**2711**	**122**	2712	122	2711	122
481.wrf	24	**1150**	**233**	1146	234	1152	233	24	1114	241	**1111**	**241**	1109	242
482.sphinx3	24	**1670**	**280**	1630	287	1689	277	24	**1536**	**304**	1544	303	1536	305

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd0905is-libs/64:/root/cpu2006-1.1/amd0905is-libs/32"
NCPUS = "6"
PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64
```

Base Compiler Invocation

C benchmarks:
`pgcc`

C++ benchmarks:
`pgcpp`

Fortran benchmarks:
`pgf95`

Benchmarks using both Fortran and C:
`pgcc pgf95`

Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -Mnomain`
436.cactusADM: `-DSPEC_CPU_LP64 -Mnomain`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
450.soplex: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -Mnomain`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`
482.sphinx3: `-DSPEC_CPU_LP64`

Base Optimization Flags

C benchmarks:
```
-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Bstatic_pgi
```

C++ benchmarks:
```
-fastsse -Msmartalloc=huge -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi
```

Fortran benchmarks:
```
-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi
```

Benchmarks using both Fortran and C:
```
-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Mvect=short -Bstatic_pgi
```

Base Other Flags

C benchmarks:
```
-Mipa=jobs:4
```

C++ benchmarks:
```
-Mipa=jobs:4
```

Fortran benchmarks:
```
-Mipa=jobs:4
```

Benchmarks using both Fortran and C:
```
-Mipa=jobs:4
```

Peak Compiler Invocation

C benchmarks:
```
pgcc
```

C++ benchmarks (except as noted below):
```
openCC
```

444.namd: `pgcpp`

Fortran benchmarks (except as noted below):
```
openf95
```

410.bwaves: `pgf95`

Continued on next page

Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):
pgcc pgf95

435.gromacs: opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64
-Bstatic_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
-Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc_eh
-tp shanghai-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed
-Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: basepeak = yes

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8
-Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre
-Mfprelaxed -tp shanghai-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `-fastsse -Mvect=noaltcode -Msmartalloc=huge -Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi`

Peak Other Flags

C benchmarks:
`-Mipa=jobs:4`(pass 2)

C++ benchmarks:

444.namd: `-Mipa=jobs:4`(pass 2)

Fortran benchmarks:

410.bwaves: `-Mipa=jobs:4`

434.zeusmp: `-Mipa=jobs:4`

437.leslie3d: `-Mipa=jobs:4`(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: `-Mipa=jobs:4`

454.calculix: `-Mipa=jobs:4`(pass 2)

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revA.20090710.html
http://www.spec.org/cpu2006/flags/amd-platform.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revA.20090710.xml
http://www.spec.org/cpu2006/flags/amd-platform.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R905 (AMD Opteron 8431, 2.40 GHz)

SPECfp_rate2006 = 263

SPECfp_rate_base2006 = 240

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2009
Hardware Availability: Jul-2009
Software Availability: Apr-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 02:27:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 July 2009.