SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R805 (AMD Opteron 2423 HE, 2.00 GHz)

SPECfp®_rate2006 = 125

SPECfp_rate_base2006 = 113

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2009
Hardware Availability: Aug-2009
Software Availability: Apr-2009

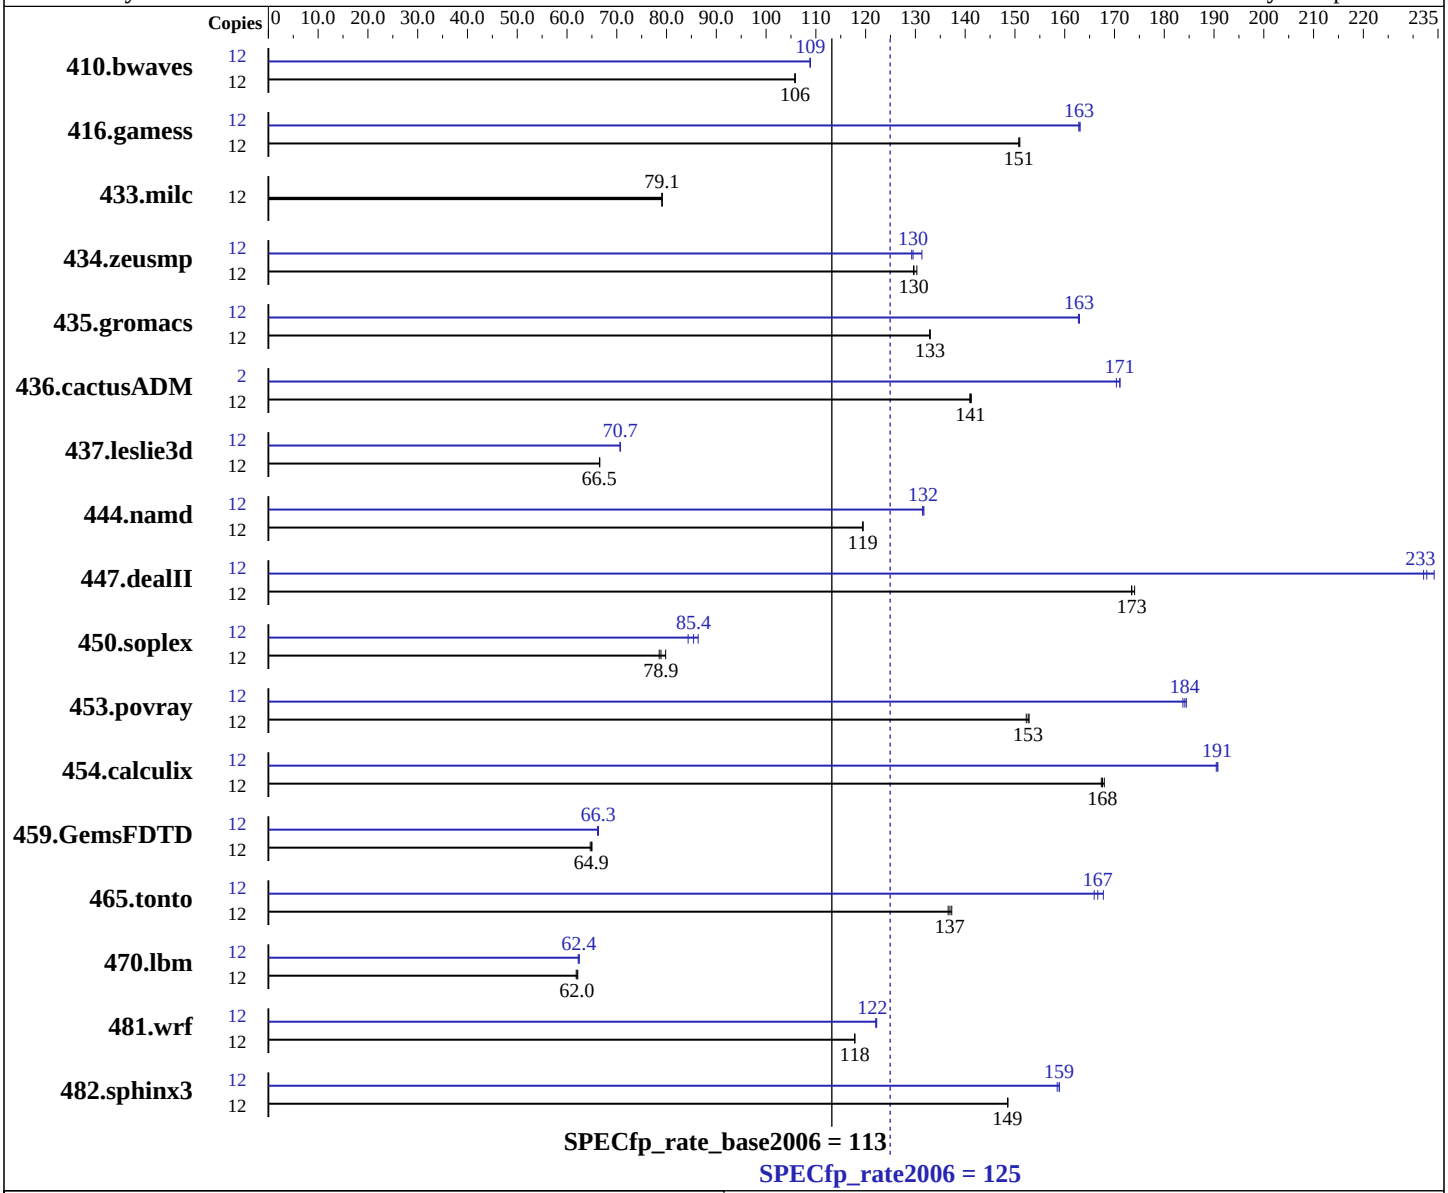

Hardware

CPU Name:	AMD Opteron 2423 HE
CPU Characteristics:	
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R805 (AMD Opteron 2423 HE, 2.00 GHz)

SPECfp_rate2006 = 125

SPECfp_rate_base2006 = 113

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2009
Hardware Availability: Aug-2009
Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8 x 4 GB DDR2-800)
Disk Subsystem: 1 x 73 GB 15000 RPM SAS
Other Hardware: None

Other Software: binutils 2.18

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1542	106	**1541**	**106**	1541	106	12	**1497**	**109**	1497	109	1499	109
416.gamess	12	1558	151	1556	151	**1558**	**151**	12	**1442**	**163**	1443	163	1441	163
433.milc	12	**1393**	**79.1**	1393	79.1	1393	79.1	12	**1393**	**79.1**	1393	79.1	1393	79.1
434.zeusmp	12	**842**	**130**	838	130	842	130	12	832	131	845	129	**843**	**130**
435.gromacs	12	645	133	644	133	**644**	**133**	12	526	163	**526**	**163**	526	163
436.cactusADM	12	**1016**	**141**	1018	141	1015	141	2	**140**	**171**	140	170	140	171
437.leslie3d	12	**1696**	**66.5**	1696	66.5	1694	66.6	12	**1596**	**70.7**	1595	70.7	1596	70.7
444.namd	12	**806**	**119**	806	119	805	120	12	**732**	**132**	732	131	731	132
447.dealII	12	**791**	**173**	789	174	792	173	12	591	232	**590**	**233**	586	234
450.soplex	12	1274	78.5	**1269**	**78.9**	1254	79.8	12	1187	84.3	**1171**	**85.4**	1159	86.4
453.povray	12	419	152	**418**	**153**	418	153	12	**347**	**184**	347	184	346	184
454.calculix	12	592	167	**591**	**168**	589	168	12	519	191	520	190	**519**	**191**
459.GemsFDTD	12	1969	64.7	1958	65.0	**1961**	**64.9**	12	**1921**	**66.3**	1926	66.1	1920	66.3
465.tonto	12	860	137	**862**	**137**	865	137	12	**709**	**167**	704	168	712	166
470.lbm	12	2652	62.2	**2658**	**62.0**	2666	61.9	12	2640	62.5	2649	62.2	**2642**	**62.4**
481.wrf	12	**1138**	**118**	1137	118	1138	118	12	1098	122	**1097**	**122**	1097	122
482.sphinx3	12	1574	149	1575	149	**1575**	**149**	12	**1472**	**159**	1476	158	1472	159

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd0905is-libs/64:/root/cpu2006-1.1/amd0905is-libs/32"
NCPUS = "6"
PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64
```

Base Compiler Invocation

C benchmarks:
`pgcc`

C++ benchmarks:
`pgcpp`

Fortran benchmarks:
`pgf95`

Benchmarks using both Fortran and C:
`pgcc pgf95`

Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -Mnomain`
436.cactusADM: `-DSPEC_CPU_LP64 -Mnomain`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
450.soplex: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -Mnomain`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`
482.sphinx3: `-DSPEC_CPU_LP64`

Base Optimization Flags

C benchmarks:
```
-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Bstatic_pgi
```

C++ benchmarks:
```
-fastsse -Msmartalloc=huge -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi
```

Fortran benchmarks:
```
-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi
```

Benchmarks using both Fortran and C:
```
-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Mvect=short -Bstatic_pgi
```

Base Other Flags

C benchmarks:
```
-Mipa=jobs:4
```

C++ benchmarks:
```
-Mipa=jobs:4
```

Fortran benchmarks:
```
-Mipa=jobs:4
```

Benchmarks using both Fortran and C:
```
-Mipa=jobs:4
```

Peak Compiler Invocation

C benchmarks:
```
pgcc
```

C++ benchmarks (except as noted below):
```
openCC
```

444.namd: `pgcpp`

Fortran benchmarks (except as noted below):
```
openf95
```

410.bwaves: `pgf95`

Continued on next page

Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):
pgcc pgf95

435.gromacs: opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64
-Bstatic_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
-Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc_eh
-tp shanghai-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed
-Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0
-Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8
-Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre

Continued on next page

Peak Optimization Flags (Continued)

454.calculix (continued):
`-Mfprelaxed -tp shanghai-64 -Bstatic_pgi`

481.wrf: `-fastsse -Mvect=noaltcode -Msmartalloc=huge -Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi`

Peak Other Flags

C benchmarks:
`-Mipa=jobs:4`(pass 2)

C++ benchmarks:

444.namd: `-Mipa=jobs:4`(pass 2)

Fortran benchmarks:

410.bwaves: `-Mipa=jobs:4`

434.zeusmp: `-Mipa=jobs:4`

437.leslie3d: `-Mipa=jobs:4`(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: `-Mipa=jobs:4`

454.calculix: `-Mipa=jobs:4`(pass 2)

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revB.html
http://www.spec.org/cpu2006/flags/amd-platform.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revB.xml
http://www.spec.org/cpu2006/flags/amd-platform.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R805 (AMD Opteron 2423 HE, 2.00 GHz)

SPECfp_rate2006 = 125

SPECfp_rate_base2006 = 113

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2009
Hardware Availability: Aug-2009
Software Availability: Apr-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:19:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 August 2009.