SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun Fire X4440 (AMD Opteron 8435 2.6GHz)

SPECfp®_rate2006 = 252

SPECfp_rate_base2006 = 228

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Aug-2009
Hardware Availability: Jul-2009
Software Availability: Apr-2009

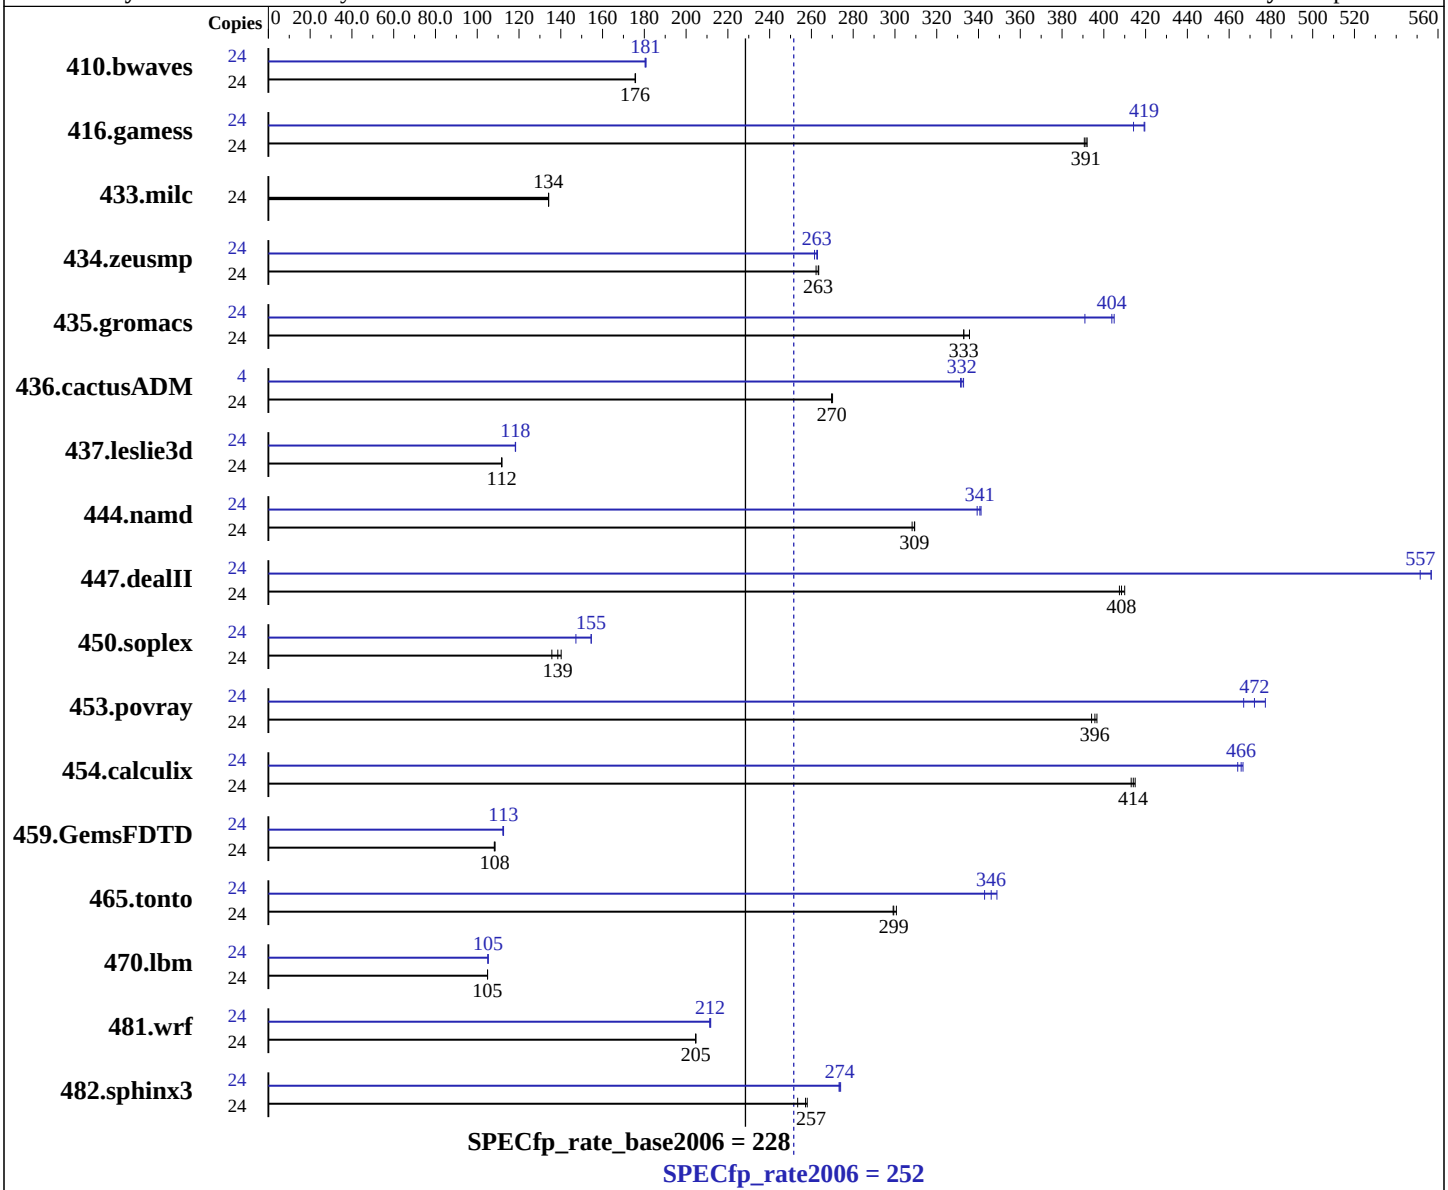

Hardware

CPU Name:	AMD Opteron 8435
CPU Characteristics:	
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	24 cores, 4 chips, 6 cores/chip
CPU(s) orderable:	2 or 4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5 for x86_64
Compiler:	PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun Fire X4440 (AMD Opteron 8435 2.6GHz)

SPECfp_rate2006 = 252

SPECfp_rate_base2006 = 228

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Aug-2009
Hardware Availability: Jul-2009
Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (16x4GB, DDR2-667, CL5, Reg, Dual Rank)
Disk Subsystem: 1 x 146 GB SATA 10 K RPM
Other Hardware: None

Other Software: binutils 2.18

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	**1856**	**176**	1855	176	1857	176	24	1808	180	**1807**	**181**	1804	181
416.gamess	24	1199	392	**1200**	**391**	1203	391	24	1120	420	**1121**	**419**	1134	414
433.milc	24	**1642**	**134**	1642	134	1642	134	24	**1642**	**134**	1642	134	1642	134
434.zeusmp	24	833	262	**830**	**263**	829	264	24	835	261	**832**	**263**	831	263
435.gromacs	24	515	333	510	336	**515**	**333**	24	**424**	**404**	438	391	423	405
436.cactusADM	24	1062	270	**1063**	**270**	1064	270	4	144	331	144	333	**144**	**332**
437.leslie3d	24	**2019**	**112**	2021	112	2018	112	24	1908	118	**1907**	**118**	1906	118
444.namd	24	625	308	622	309	**622**	**309**	24	567	339	564	341	**565**	**341**
447.dealII	24	674	407	**672**	**408**	670	410	24	498	551	493	557	**493**	**557**
450.soplex	24	1475	136	**1444**	**139**	1428	140	24	1359	147	**1295**	**155**	1295	155
453.povray	24	322	397	**323**	**396**	324	394	24	273	467	**270**	**472**	267	477
454.calculix	24	479	413	477	415	**478**	**414**	24	424	467	**425**	**466**	427	464
459.GemsFDTD	24	2348	108	2354	108	**2349**	**108**	24	2261	113	**2262**	**113**	2268	112
465.tonto	24	789	299	**789**	**299**	785	301	24	**682**	**346**	677	349	689	343
470.lbm	24	**3143**	**105**	3142	105	3143	105	24	3136	105	**3136**	**105**	3135	105
481.wrf	24	1310	205	1310	205	**1310**	**205**	24	1269	211	**1267**	**212**	1266	212
482.sphinx3	24	1813	258	**1819**	**257**	1846	253	24	1712	273	**1710**	**274**	1707	274

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

```
Default BIOS settings used except:
DCT Unganged Mode set to "Always" to enable Unganged Mode
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/data1/SPECcpu2006v1.1/amd0905is-libs/64:/data1/SPECcpu2006v1.1/amd0905is-libs/32"
NCPUS = "6"
PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<a href="http://developer.amd.com/cpu/open64">http://developer.amd.com/cpu/open64</a>.
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Fortran benchmarks:
pgf95

Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page

Base Portability Flags (Continued)

482.sphinx3: `-DSPEC_CPU_LP64`

Base Optimization Flags

C benchmarks:
`-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi`

C++ benchmarks:
`-fastsse -Msmartalloc=huge -Mfprelaxed --zc_eh -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi`

Fortran benchmarks:
`-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi`

Benchmarks using both Fortran and C:
`-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64 -Mvect=short -Bstatic_pgi`

Base Other Flags

C benchmarks:
`-Mipa=jobs:4`

C++ benchmarks:
`-Mipa=jobs:4`

Fortran benchmarks:
`-Mipa=jobs:4`

Benchmarks using both Fortran and C:
`-Mipa=jobs:4`

Peak Compiler Invocation

C benchmarks:
`pgcc`

C++ benchmarks (except as noted below):
`openCC`

444.namd: `pgcpp`

Continued on next page

Peak Compiler Invocation (Continued)

Fortran benchmarks (except as noted below):
openf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):
pgcc pgf95

435.gromacs: opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64
-Bstatic_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
-Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc_eh
-tp shanghai-64 -Bstatic_pgi

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed
-Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0
-Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8
-Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

Continued on next page

Peak Optimization Flags (Continued)

436.cactusADM: `-fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi`

454.calculix: `-Mpfi=indirect`(pass 1) `-Mpfo=indirect`(pass 2) `-Mipa=fast`(pass 2) `-Mipa=inline`(pass 2) `-fastsse -Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre -Mfprelaxed -tp shanghai-64 -Bstatic_pgi`

481.wrf: `-fastsse -Mvect=noaltcode -Msmartalloc=huge -Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi`

Peak Other Flags

C benchmarks:
`-Mipa=jobs:4`(pass 2)

C++ benchmarks:

444.namd: `-Mipa=jobs:4`(pass 2)

Fortran benchmarks:

410.bwaves: `-Mipa=jobs:4`

434.zeusmp: `-Mipa=jobs:4`

437.leslie3d: `-Mipa=jobs:4`(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: `-Mipa=jobs:4`

454.calculix: `-Mipa=jobs:4`(pass 2)

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.html
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html
http://www.spec.org/cpu2006/flags/amd-platform.20090710.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.xml
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml
http://www.spec.org/cpu2006/flags/amd-platform.20090710.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun Fire X4440 (AMD Opteron 8435 2.6GHz)

SPECfp_rate2006 = 252

SPECfp_rate_base2006 = 228

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Aug-2009
Hardware Availability: Jul-2009
Software Availability: Apr-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 02:11:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 September 2009.