



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 208

Dell Precision T7500 (Intel Xeon W5590, 3.33 GHz)

SPECfp_rate_base2006 = 201

CPU2006 license: 55


Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: May-2009

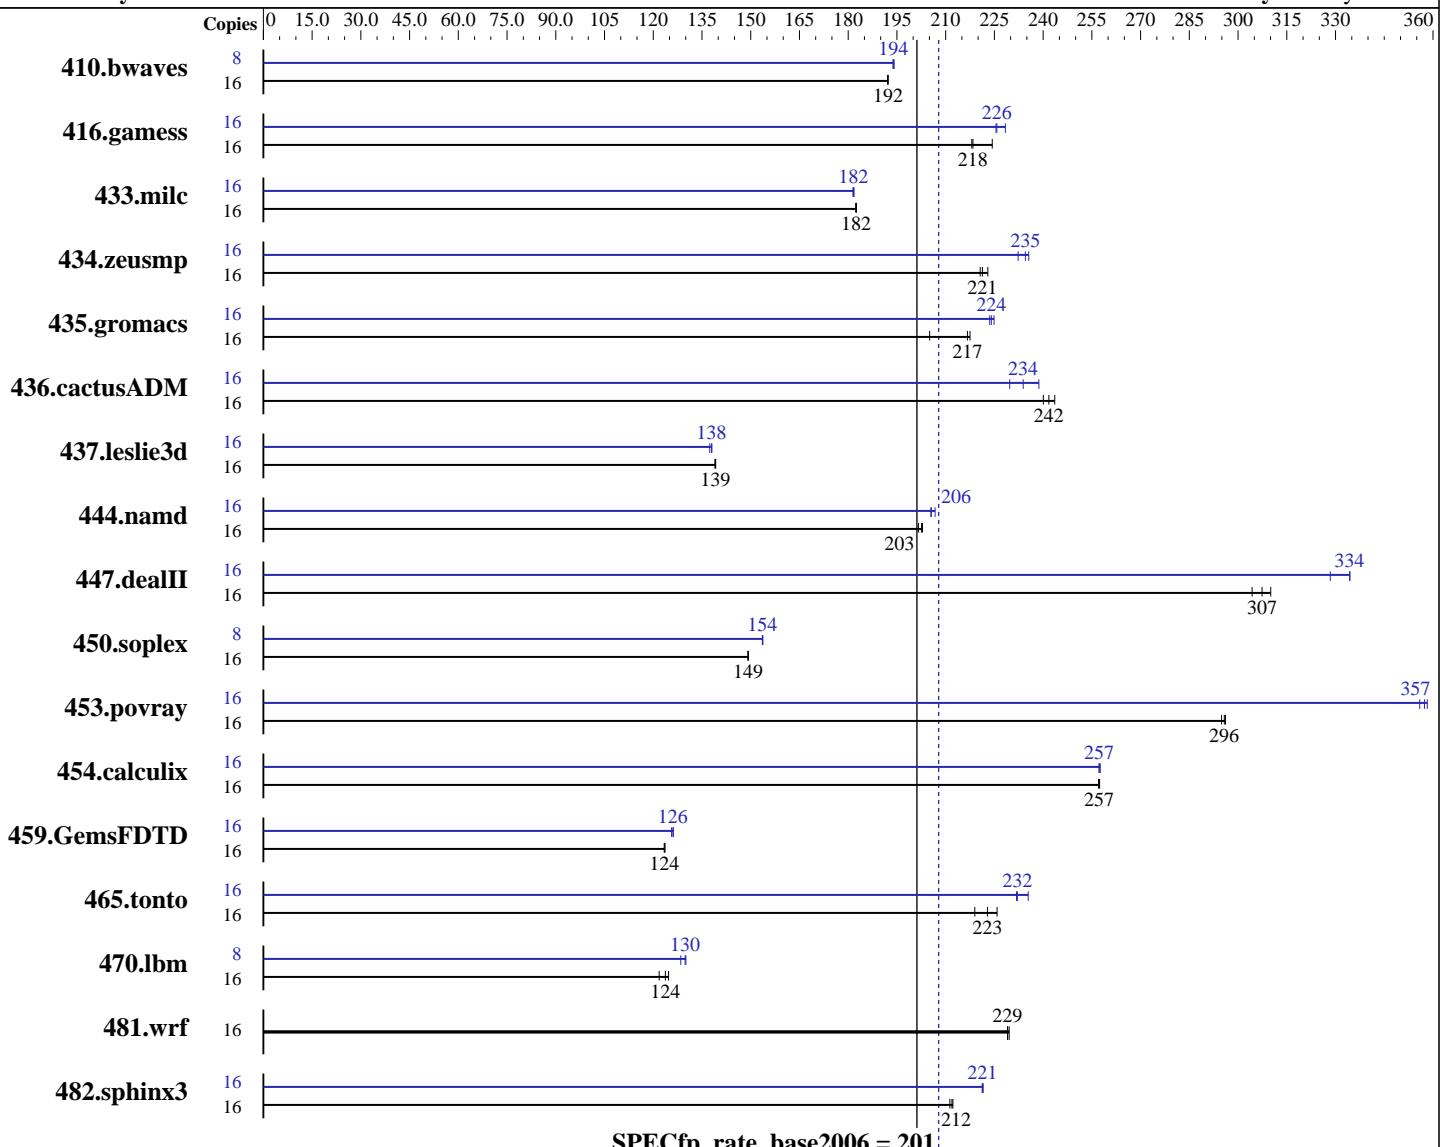

Hardware

CPU Name: Intel Xeon W5590
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz: 3333
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Client release 5.3, Kernel 2.6.18-128.el5 on an x86_64
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
Auto Parallel: No
File System: ext3
System State: Run level 3 (multi-user)
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 208

Dell Precision T7500 (Intel Xeon W5590, 3.33 GHz)

SPECfp_rate_base2006 = 201

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: May-2009

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB PC3-10600R)
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1131	192	<u>1131</u>	<u>192</u>	1132	192	8	561	194	<u>561</u>	<u>194</u>	560	194
416.gamess	16	1437	218	1396	224	<u>1434</u>	<u>218</u>	16	<u>1388</u>	<u>226</u>	1372	228	1389	225
433.milc	16	806	182	<u>805</u>	<u>182</u>	805	183	16	<u>809</u>	<u>182</u>	808	182	809	181
434.zeusmp	16	660	221	653	223	<u>658</u>	<u>221</u>	16	<u>621</u>	<u>235</u>	618	236	627	232
435.gromacs	16	557	205	<u>527</u>	<u>217</u>	525	217	16	<u>510</u>	<u>224</u>	511	224	508	225
436.cactusADM	16	<u>791</u>	<u>242</u>	785	244	796	240	16	832	230	<u>818</u>	<u>234</u>	801	239
437.leslie3d	16	1082	139	<u>1081</u>	<u>139</u>	1080	139	16	1095	137	<u>1090</u>	<u>138</u>	1090	138
444.namd	16	<u>633</u>	<u>203</u>	633	203	636	202	16	621	207	<u>624</u>	<u>206</u>	625	205
447.dealII	16	601	304	<u>595</u>	<u>307</u>	590	310	16	<u>547</u>	<u>334</u>	557	328	547	334
450.soplex	16	895	149	894	149	<u>894</u>	<u>149</u>	8	434	154	<u>434</u>	<u>154</u>	434	154
453.povray	16	<u>288</u>	<u>296</u>	287	296	289	295	16	239	356	238	358	<u>238</u>	<u>357</u>
454.calculix	16	<u>513</u>	<u>257</u>	514	257	513	257	16	513	257	<u>513</u>	<u>257</u>	512	258
459.GemsFDTD	16	<u>1374</u>	<u>124</u>	1374	124	1376	123	16	1351	126	<u>1347</u>	<u>126</u>	1345	126
465.tonto	16	719	219	697	226	<u>706</u>	<u>223</u>	16	679	232	<u>678</u>	<u>232</u>	669	235
470.lbm	16	1763	125	<u>1777</u>	<u>124</u>	1805	122	8	845	130	<u>847</u>	<u>130</u>	856	128
481.wrf	16	780	229	<u>780</u>	<u>229</u>	779	230	16	780	229	<u>780</u>	<u>229</u>	779	230
482.sphinx3	16	1469	212	1476	211	<u>1471</u>	<u>212</u>	16	<u>1409</u>	<u>221</u>	1408	222	1410	221

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 numactl was used to bind copies to the cores

Platform Notes

BIOS Settings:

Memory Node Interleaving: NUMA

Hyper-threading: ENABLE



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision T7500 (Intel Xeon W5590, 3.33 GHz)

SPECfp_rate2006 = 208

SPECfp_rate_base2006 = 201

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2009

Hardware Availability: Aug-2009

Software Availability: May-2009

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision T7500 (Intel Xeon W5590, 3.33 GHz)

SPECfp_rate2006 = 208

SPECfp_rate_base2006 = 201

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2009

Hardware Availability: Aug-2009

Software Availability: May-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias

470.lbm: -xsse4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision T7500 (Intel Xeon W5590, 3.33 GHz)

SPECfp_rate2006 = 208

SPECfp_rate_base2006 = 201

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2009

Hardware Availability: Aug-2009

Software Availability: May-2009

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision T7500 (Intel Xeon W5590, 3.33 GHz)

SPECfp_rate2006 = 208

SPECfp_rate_base2006 = 201

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2009

Hardware Availability: Aug-2009

Software Availability: May-2009

Peak Optimization Flags (Continued)

436.cactusADM: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -opt-prefetch -auto-ilp32

454.calculix: -xsse4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/dell.flags.ic11.0.lin.20090915.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/dell.flags.ic11.0.lin.20090915.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 02:44:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 15 September 2009.