SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/iR110a-1
(Intel Xeon L3360)

SPECfp®2006 = 24.3

SPECfp_base2006 = 23.5

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Sep-2009
Hardware Availability: May-2009
Software Availability: Nov-2008

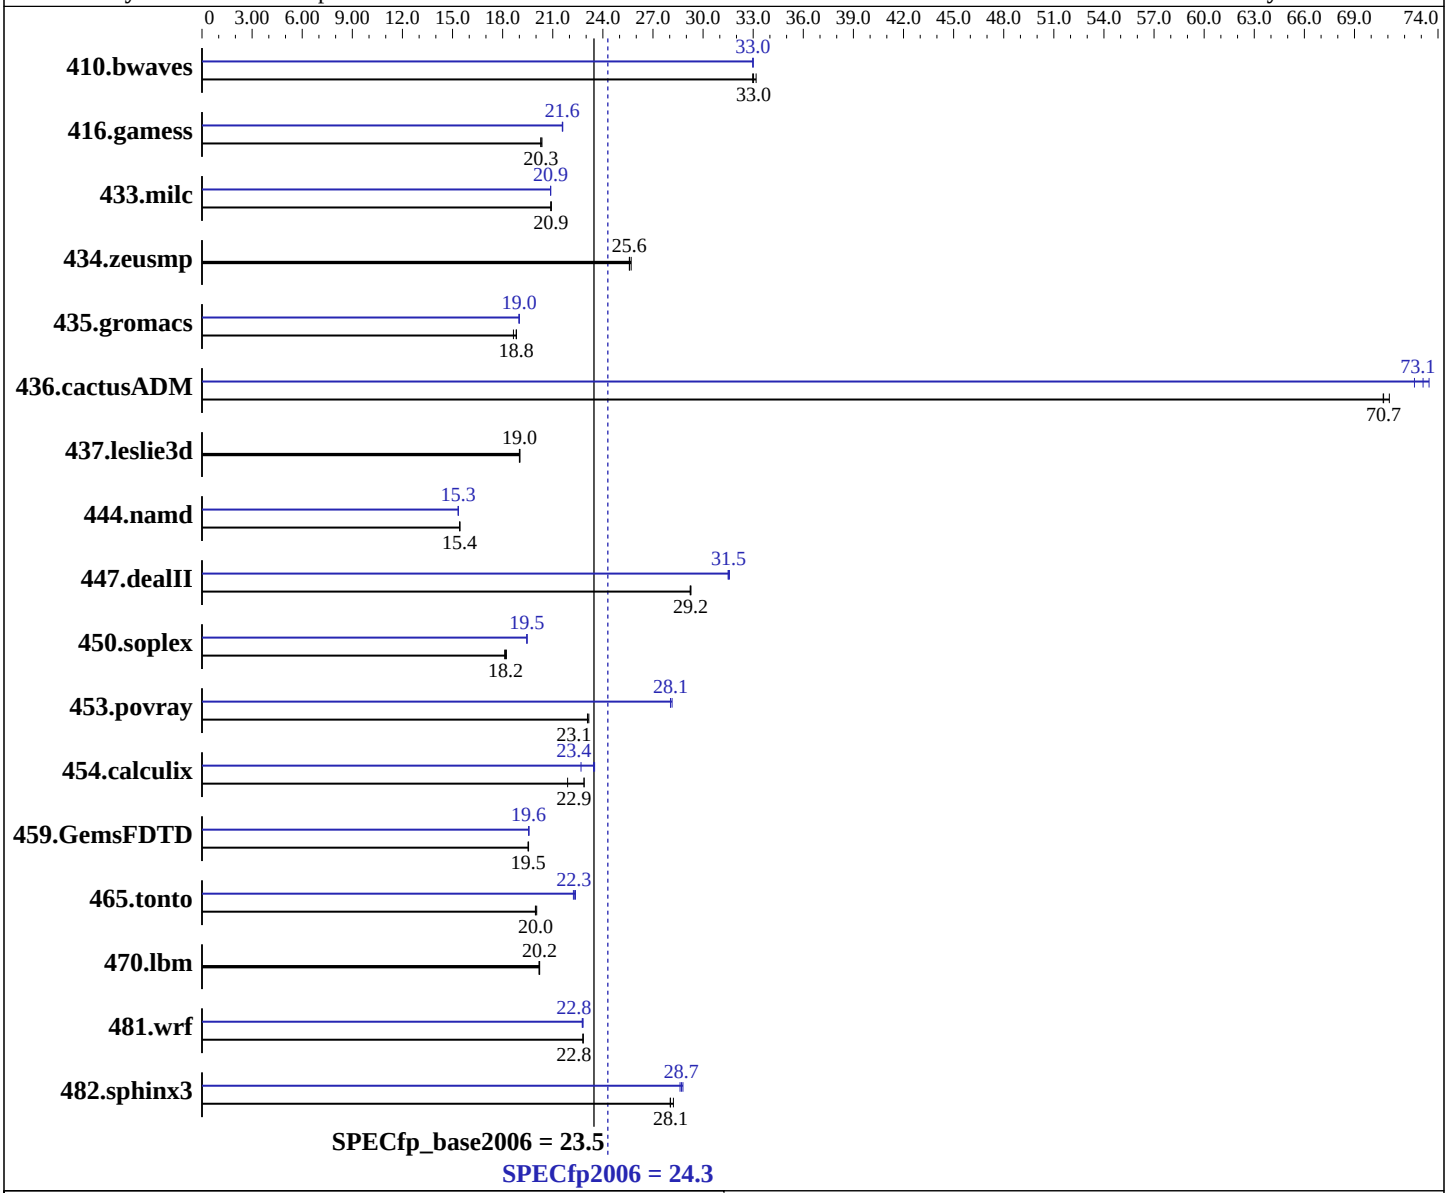

Hardware

CPU Name:	Intel Xeon L3360
CPU Characteristics:	1333 MHz system bus
CPU MHz:	2833
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ and Fortran Compiler Professional 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.069, l_fproc_p_11.0.069
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/iR110a-1
(Intel Xeon L3360)

SPECfp2006 = 24.3

SPECfp_base2006 = 23.5

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Sep-2009
Hardware Availability: May-2009
Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 8 GB (4x2 GB PC2-6400E, 2 rank, CL6-6-6, ECC)
Disk Subsystem: 1x160 GB SATA2, 7200 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	410	33.2	412	33.0	**412**	**33.0**	412	33.0	412	33.0	**412**	**33.0**
416.gamess	965	20.3	962	20.4	**965**	**20.3**	908	21.6	906	21.6	**907**	**21.6**
433.milc	439	20.9	**439**	**20.9**	440	20.9	440	20.9	**440**	**20.9**	440	20.9
434.zeusmp	**356**	**25.6**	354	25.7	356	25.6	**356**	**25.6**	354	25.7	356	25.6
435.gromacs	383	18.6	379	18.8	**380**	**18.8**	376	19.0	**376**	**19.0**	376	19.0
436.cactusADM	169	70.7	**169**	**70.7**	168	71.1	163	73.5	**163**	**73.1**	165	72.6
437.leslie3d	**494**	**19.0**	494	19.0	495	19.0	**494**	**19.0**	494	19.0	495	19.0
444.namd	520	15.4	**520**	**15.4**	520	15.4	523	15.3	**523**	**15.3**	523	15.3
447.dealII	**391**	**29.2**	391	29.3	391	29.2	362	31.6	**363**	**31.5**	363	31.5
450.soplex	458	18.2	**459**	**18.2**	460	18.1	429	19.5	**429**	**19.5**	429	19.4
453.povray	230	23.2	**230**	**23.1**	231	23.1	190	28.0	189	28.1	**190**	**28.1**
454.calculix	377	21.9	**361**	**22.9**	361	22.9	364	22.7	351	23.5	**352**	**23.4**
459.GemsFDTD	543	19.5	543	19.6	**543**	**19.5**	**542**	**19.6**	542	19.6	542	19.6
465.tonto	491	20.0	**492**	**20.0**	493	20.0	440	22.4	**441**	**22.3**	443	22.2
470.lbm	681	20.2	**680**	**20.2**	680	20.2	681	20.2	**680**	**20.2**	680	20.2
481.wrf	490	22.8	**490**	**22.8**	490	22.8	490	22.8	491	22.8	**490**	**22.8**
482.sphinx3	**695**	**28.1**	691	28.2	695	28.0	677	28.8	681	28.6	**679**	**28.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 200M
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

Continued on next page

Peak Compiler Invocation (Continued)

482.sphinx3: /opt/intel/Compiler/11.0/069/bin/ia32/icc
-L/opt/intel/Compiler/11.0/069/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/069/ipp/ia32/include

C++ benchmarks (except as noted below):
icpc

450.soplex: /opt/intel/Compiler/11.0/069/bin/ia32/icpc
-L/opt/intel/Compiler/11.0/069/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/069/ipp/ia32/include

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -scalar-rep- -opt-prefetch

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revH.html
http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revH.xml
http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:02:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 September 2009.