SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX200 S5, Intel Xeon E5502, 1.87 GHz

SPECfp®_rate2006 = 36.4

SPECfp_rate_base2006 = 35.1

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Aug-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2009

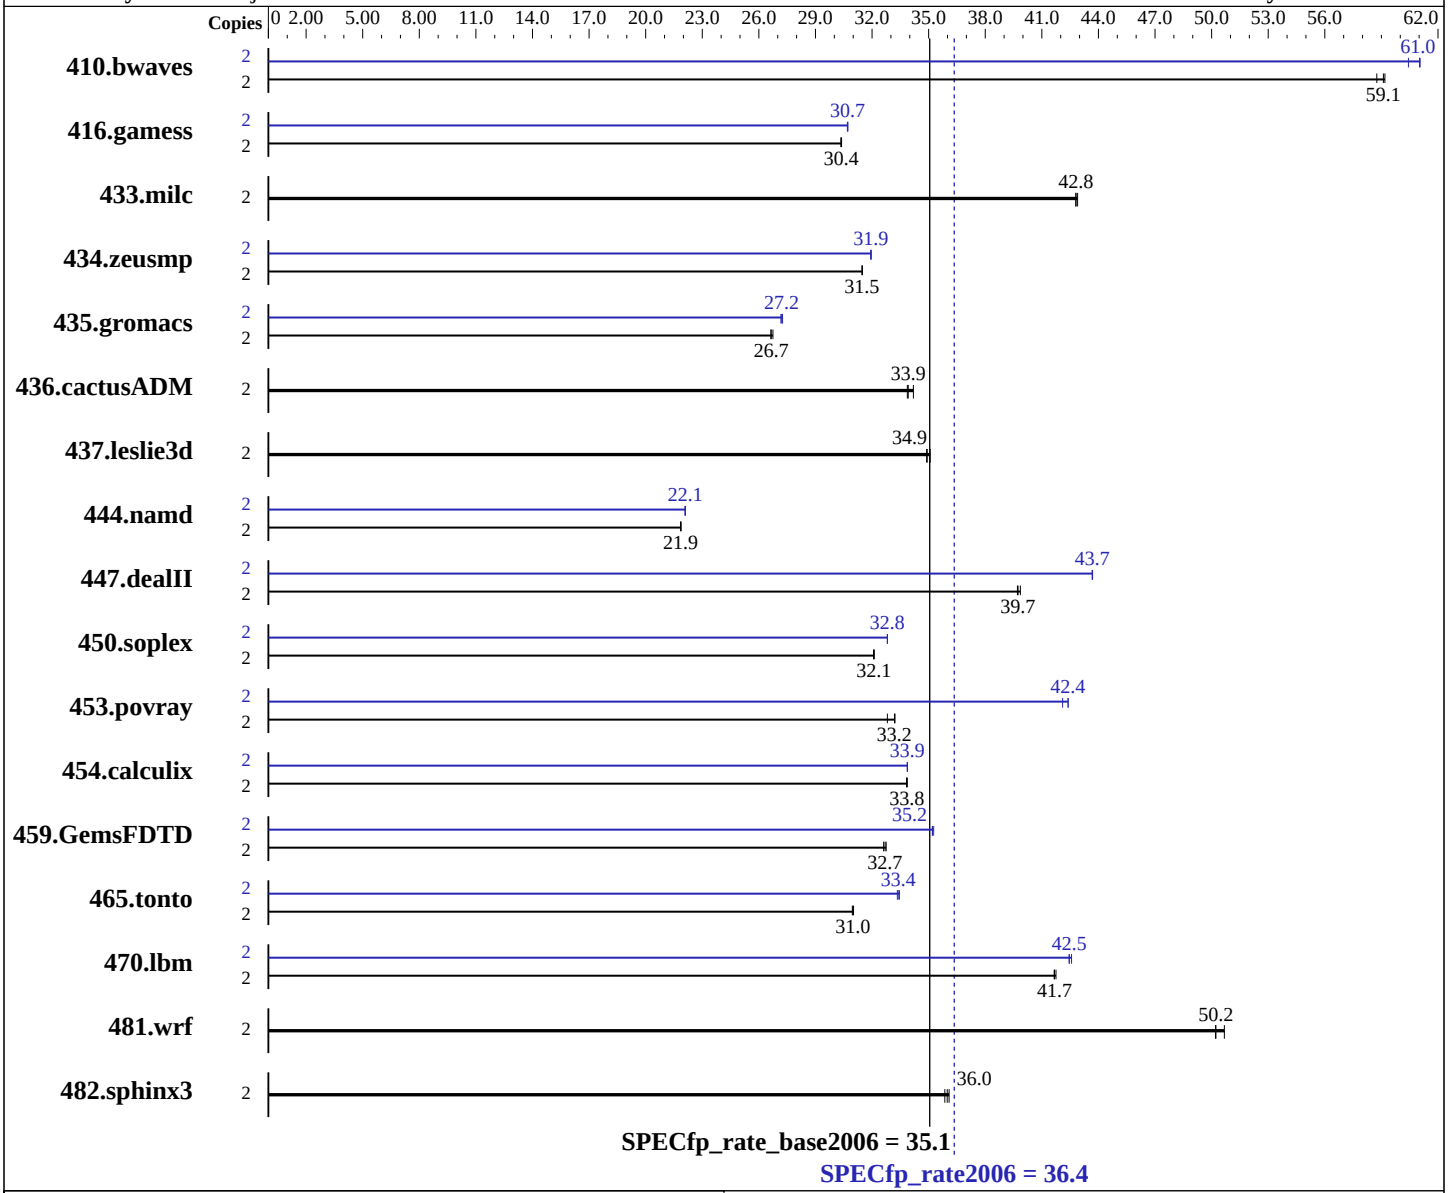

Hardware

CPU Name:	Intel Xeon E5502
CPU Characteristics:	
CPU MHz:	1867
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
Auto Parallel:	No
File System:	ext3
System State:	Multi-User Run Level 3
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX200 S5, Intel Xeon E5502, 1.87 GHz

SPECfp_rate2006 = 36.4

SPECfp_rate_base2006 = 35.1

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Aug-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2009

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6x4 GB PC3-8500R, 2 rank, CL7-7-7, ECC, see add'l detail in notes)
Disk Subsystem: 1 x SATA, 250 GB, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	459	59.2	**460**	**59.1**	463	58.8	2	450	60.4	445	61.1	**445**	**61.0**
416.gamess	2	1289	30.4	**1289**	**30.4**	1291	30.3	2	**1275**	**30.7**	1275	30.7	1276	30.7
433.milc	2	428	42.9	**429**	**42.8**	429	42.8	2	428	42.9	**429**	**42.8**	429	42.8
434.zeusmp	2	578	31.5	**578**	**31.5**	578	31.5	2	570	31.9	**570**	**31.9**	570	32.0
435.gromacs	2	536	26.6	534	26.7	**536**	**26.7**	2	**525**	**27.2**	524	27.3	526	27.2
436.cactusADM	2	**705**	**33.9**	699	34.2	706	33.9	2	**705**	**33.9**	699	34.2	706	33.9
437.leslie3d	2	539	34.9	536	35.1	**538**	**34.9**	2	539	34.9	536	35.1	**538**	**34.9**
444.namd	2	733	21.9	734	21.9	**734**	**21.9**	2	**726**	**22.1**	726	22.1	726	22.1
447.dealII	2	574	39.9	576	39.7	**576**	**39.7**	2	524	43.7	**524**	**43.7**	524	43.7
450.soplex	2	520	32.1	**520**	**32.1**	519	32.1	2	508	32.8	508	32.8	**508**	**32.8**
453.povray	2	320	33.2	**321**	**33.2**	324	32.8	2	251	42.4	**251**	**42.4**	253	42.1
454.calculix	2	487	33.9	488	33.8	**487**	**33.8**	2	**487**	**33.9**	487	33.9	487	33.9
459.GemsFDTD	2	648	32.7	**649**	**32.7**	651	32.6	2	**603**	**35.2**	602	35.3	603	35.2
465.tonto	2	634	31.0	**635**	**31.0**	636	31.0	2	588	33.5	590	33.3	**589**	**33.4**
470.lbm	2	658	41.7	**659**	**41.7**	660	41.7	2	645	42.6	647	42.5	**647**	**42.5**
481.wrf	2	441	50.7	**445**	**50.2**	445	50.2	2	441	50.7	**445**	**50.2**	445	50.2
482.sphinx3	2	1087	35.9	**1083**	**36.0**	1080	36.1	2	1087	35.9	**1083**	**36.0**	1080	36.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

The system automatically configures the memory to run at 800 MHz.

General Notes

For information about Fujitsu please visit: http://www.fujitsu.com

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks (except as noted below):
icpc

450.soplex: icpc -m32

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.15.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.15.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 04:40:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 October 2009.