SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R110a-1
(Intel Pentium Dual-Core E2160)

SPECfp®_rate2006 = 21.3

SPECfp_rate_base2006 = 20.6

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Sep-2009
Hardware Availability: May-2009
Software Availability: Nov-2008

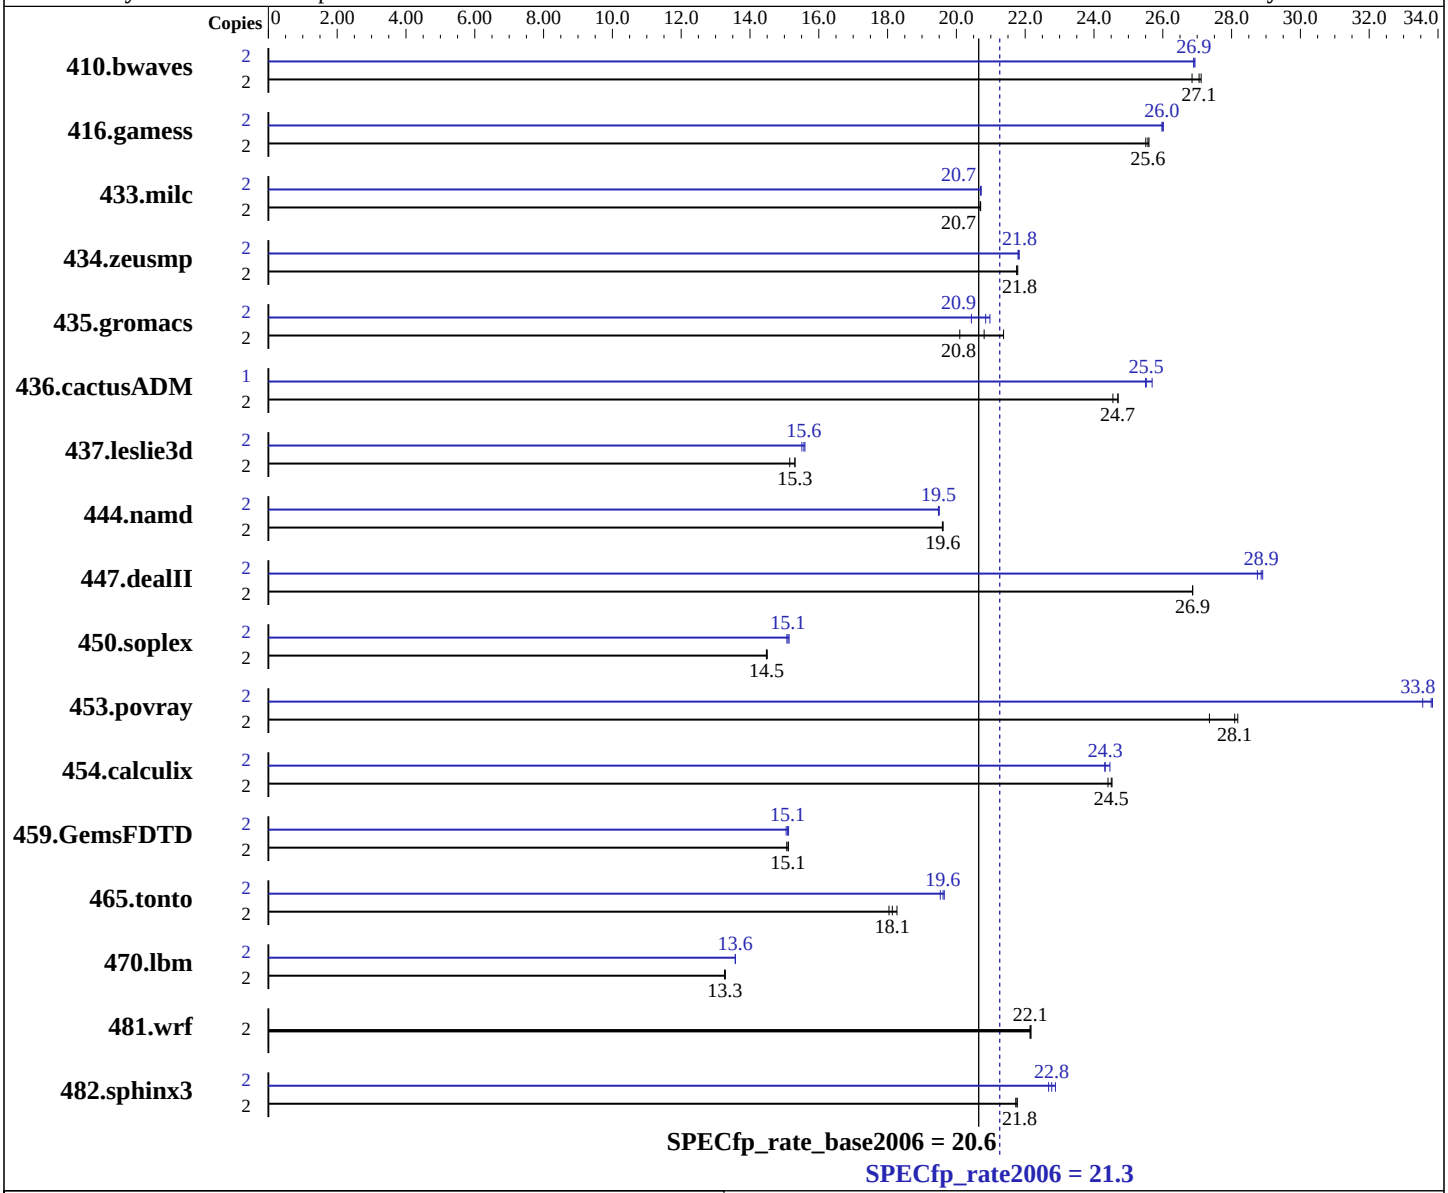

Hardware

CPU Name:	Intel Pentium Dual-Core E2160
CPU Characteristics:	1.80 GHz, 1 MB L2, 800 MHz bus
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per chip

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.069, l_cprof_p_11.0.069
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R110a-1
(Intel Pentium Dual-Core E2160)

SPECfp_rate2006 = 21.3

SPECfp_rate_base2006 = 20.6

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Sep-2009
Hardware Availability: May-2009
Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 8 GB (4x2 GB PC2-6400E, 2 rank, CL6-6-6, ECC)
Disk Subsystem: 1x160 GB SATA2, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	**1005**	**27.1**	1002	27.1	1012	26.9	2	1011	26.9	1009	26.9	**1010**	**26.9**
416.gamess	2	1530	25.6	**1532**	**25.6**	1535	25.5	2	1505	26.0	**1507**	**26.0**	1507	26.0
433.milc	2	887	20.7	887	20.7	**887**	**20.7**	2	886	20.7	887	20.7	**887**	**20.7**
434.zeusmp	2	835	21.8	**836**	**21.8**	837	21.8	2	834	21.8	835	21.8	**835**	**21.8**
435.gromacs	2	668	21.4	**686**	**20.8**	710	20.1	2	**685**	**20.9**	699	20.4	681	21.0
436.cactusADM	2	974	24.5	968	24.7	**968**	**24.7**	1	465	25.7	**468**	**25.5**	469	25.5
437.leslie3d	2	1228	15.3	**1228**	**15.3**	1240	15.2	2	**1208**	**15.6**	1205	15.6	1212	15.5
444.namd	2	**818**	**19.6**	819	19.6	818	19.6	2	**823**	**19.5**	823	19.5	822	19.5
447.dealII	2	852	26.9	852	26.9	**852**	**26.9**	2	796	28.7	**793**	**28.9**	792	28.9
450.soplex	2	1152	14.5	1150	14.5	**1152**	**14.5**	2	1102	15.1	**1104**	**15.1**	1107	15.1
453.povray	2	378	28.2	**379**	**28.1**	389	27.4	2	**315**	**33.8**	314	33.8	317	33.6
454.calculix	2	676	24.4	673	24.5	**673**	**24.5**	2	679	24.3	674	24.5	**678**	**24.3**
459.GemsFDTD	2	1408	15.1	1404	15.1	**1405**	**15.1**	2	**1406**	**15.1**	1403	15.1	1410	15.1
465.tonto	2	1077	18.3	1091	18.0	**1085**	**18.1**	2	**1003**	**19.6**	1002	19.6	1008	19.5
470.lbm	2	2072	13.3	**2070**	**13.3**	2069	13.3	2	2024	13.6	**2024**	**13.6**	2025	13.6
481.wrf	2	**1009**	**22.1**	1009	22.1	1008	22.2	2	**1009**	**22.1**	1009	22.1	1008	22.2
482.sphinx3	2	1794	21.7	1791	21.8	**1791**	**21.8**	2	1704	22.9	**1712**	**22.8**	1719	22.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 taskset was used to bind processes to cores except
 for 436.cactusADM peak
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M
```

Platform Notes

```
Bios settings:
Hardware Prefetcher:              Enabled
Adjacent Cache Line Prefetch:     Enabled
Intel SpeedStep Technology:      Disabled
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:
-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

482.sphinx3: /opt/intel/Compiler/11.0/069/bin/ia32/icc
-L/opt/intel/Compiler/11.0/069/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/069/ipp/ia32/include

C++ benchmarks (except as noted below):
icpc

450.soplex: /opt/intel/Compiler/11.0/069/bin/ia32/icpc
-L/opt/intel/Compiler/11.0/069/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/069/ipp/ia32/include

Fortran benchmarks (except as noted below):
ifort

437.leslie3d: /opt/intel/Compiler/11.0/069/bin/ia32/ifort
-L/opt/intel/Compiler/11.0/069/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/069/ipp/ia32/include

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -fno-alias

470.lbm: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -ansi-alias
-scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch

Continued on next page

Peak Optimization Flags (Continued)

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSSE3 -ipo -O3 -no-prec-div -static -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSSE3 -ipo -O3 -no-prec-div -static -unroll2 -opt-prefetch -parallel -auto-ilp32`

454.calculix: `-xSSSE3 -ipo -O3 -no-prec-div -static -auto-ilp32`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revH.html
http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revH.xml
http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 04:36:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 October 2009.