SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R110a-1
(Intel Xeon E3110)

SPECfp®_rate2006 = 34.6

SPECfp_rate_base2006 = 33.3

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Sep-2009
Hardware Availability: May-2009
Software Availability: Nov-2008

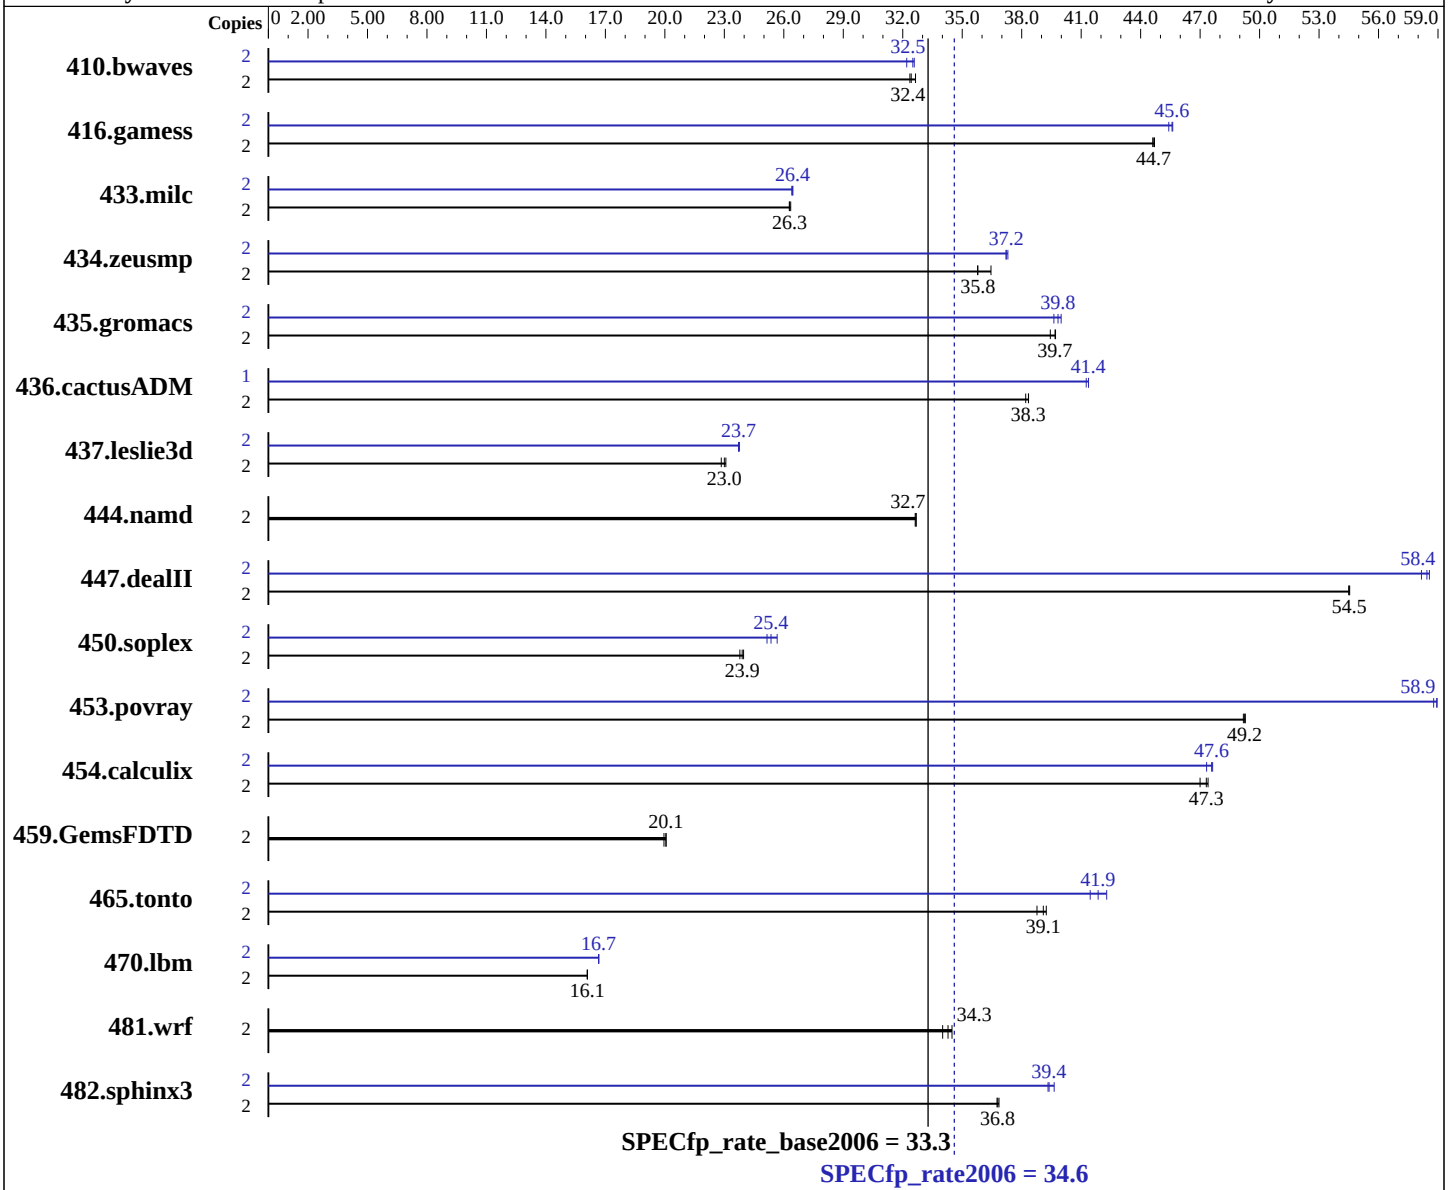

Hardware

CPU Name:	Intel Xeon E3110
CPU Characteristics:	1333 MHz bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.069, l_cprof_p_11.0.069
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R110a-1
(Intel Xeon E3110)

SPECfp_rate2006 = 34.6

SPECfp_rate_base2006 = 33.3

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Sep-2009
Hardware Availability: May-2009
Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 8 GB (4x2 GB PC2-6400E, 2 rank, CL6-6-6, ECC)
Disk Subsystem: 1x160 GB SATA2, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	833	32.6	840	32.4	**838**	**32.4**	2	**836**	**32.5**	834	32.6	844	32.2
416.gamess	2	**877**	**44.7**	878	44.6	876	44.7	2	862	45.4	858	45.6	**859**	**45.6**
433.milc	2	697	26.3	699	26.3	**698**	**26.3**	2	**694**	**26.4**	694	26.5	695	26.4
434.zeusmp	2	499	36.5	**509**	**35.8**	509	35.8	2	**489**	**37.2**	489	37.2	488	37.3
435.gromacs	2	**360**	**39.7**	362	39.4	360	39.7	2	**359**	**39.8**	357	40.0	360	39.6
436.cactusADM	2	**623**	**38.3**	626	38.2	623	38.3	1	290	41.3	289	41.4	**289**	**41.4**
437.leslie3d	2	**817**	**23.0**	823	22.8	815	23.1	2	**793**	**23.7**	793	23.7	791	23.8
444.namd	2	**491**	**32.7**	492	32.6	491	32.7	2	**491**	**32.7**	492	32.6	491	32.7
447.dealII	2	419	54.5	**420**	**54.5**	420	54.5	2	391	58.6	393	58.2	**392**	**58.4**
450.soplex	2	696	24.0	**698**	**23.9**	701	23.8	2	**658**	**25.4**	650	25.7	663	25.2
453.povray	2	216	49.3	216	49.2	**216**	**49.2**	2	181	58.8	180	59.0	**181**	**58.9**
454.calculix	2	351	47.0	**349**	**47.3**	348	47.4	2	**347**	**47.6**	346	47.6	349	47.3
459.GemsFDTD	2	**1058**	**20.1**	1058	20.1	1063	20.0	2	**1058**	**20.1**	1058	20.1	1063	20.0
465.tonto	2	502	39.2	**503**	**39.1**	508	38.8	2	475	41.5	**470**	**41.9**	465	42.3
470.lbm	2	**1707**	**16.1**	1707	16.1	1709	16.1	2	1650	16.7	**1649**	**16.7**	1649	16.7
481.wrf	2	**652**	**34.3**	657	34.0	648	34.5	2	**652**	**34.3**	657	34.0	648	34.5
482.sphinx3	2	1061	36.8	**1059**	**36.8**	1058	36.9	2	991	39.3	983	39.6	**990**	**39.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 taskset was used to bind processes to cores except
 for 436.cactusADM peak
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M
```

Platform Notes

```
Bios settings:
Hardware Prefetcher:              Enabled
Adjacent Cache Line Prefetch:    Disabled
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

482.sphinx3: /opt/intel/Compiler/11.0/069/bin/ia32/icc
-L/opt/intel/Compiler/11.0/069/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/069/ipp/ia32/include

C++ benchmarks (except as noted below):
icpc

450.soplex: /opt/intel/Compiler/11.0/069/bin/ia32/icpc
-L/opt/intel/Compiler/11.0/069/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/069/ipp/ia32/include

Fortran benchmarks (except as noted below):
ifort

437.leslie3d: /opt/intel/Compiler/11.0/069/bin/ia32/ifort
-L/opt/intel/Compiler/11.0/069/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/069/ipp/ia32/include

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -ansi-alias
-scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -auto

Continued on next page

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -opt-prefetch -parallel -auto-ilp32`

454.calculix: `-xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revH.html
http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revH.xml
http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 04:05:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 October 2009.