



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems
Sun SPARC Enterprise M8000**

**SPECfp®_rate2006 = 666
SPECfp_rate_base2006 = 616**

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Oct-2009

Hardware Availability: Nov-2009

Software Availability: Oct-2009

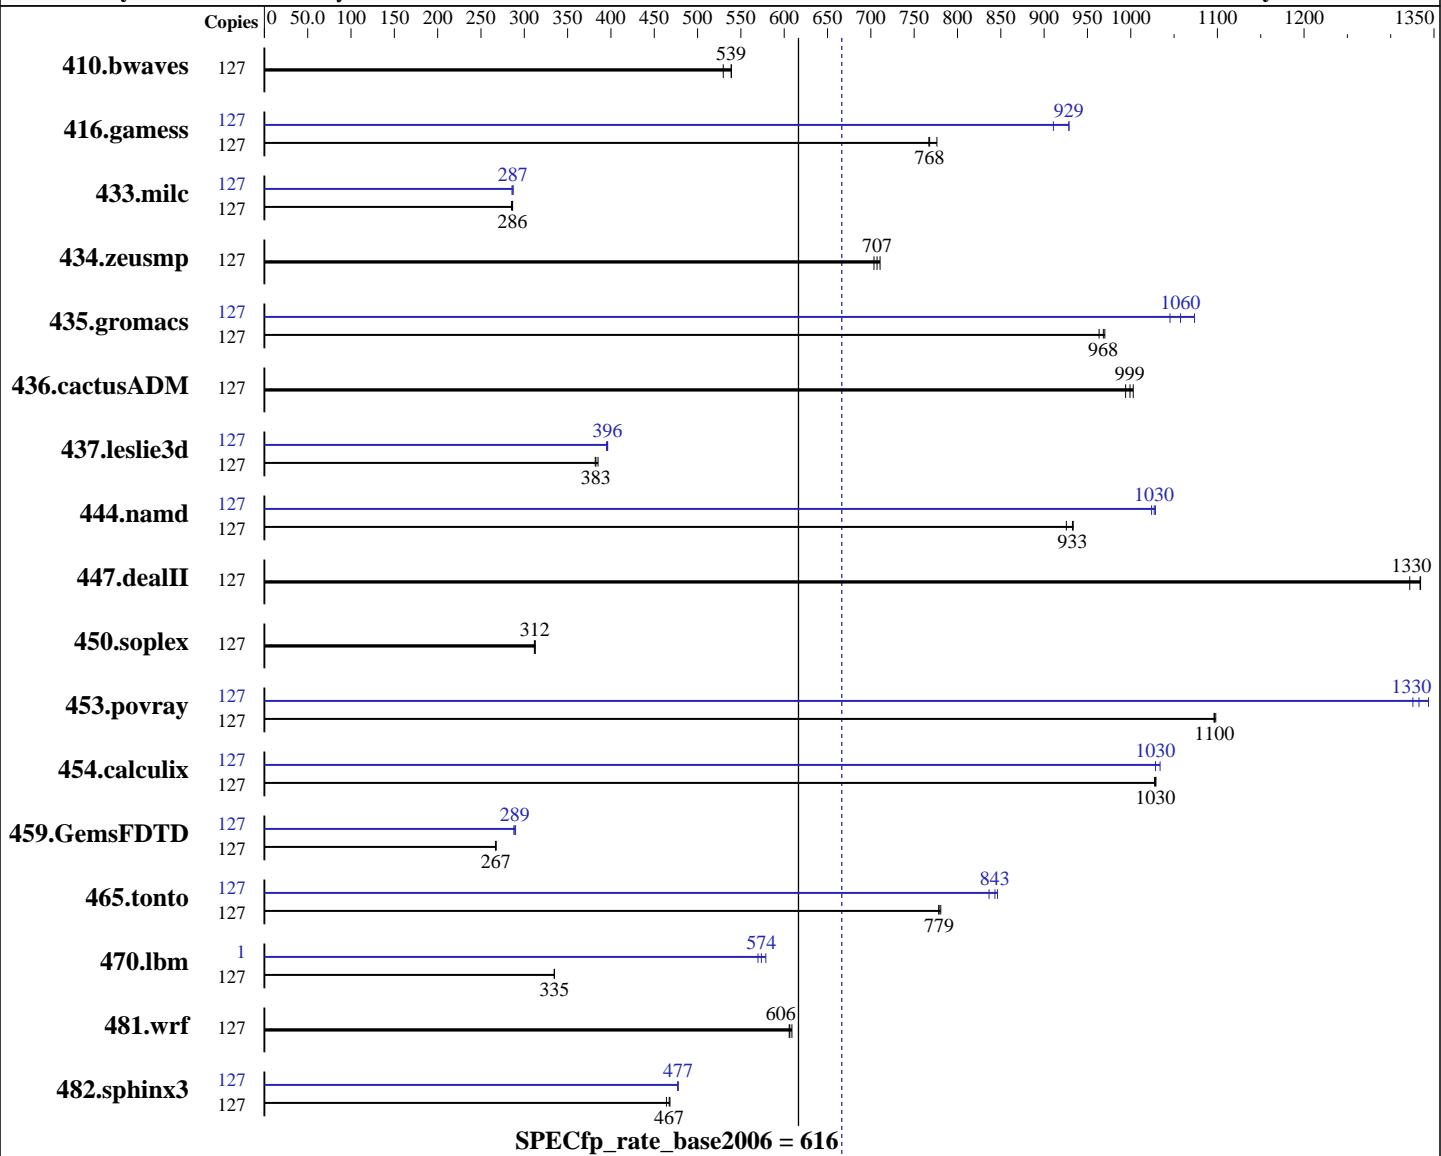

SPECfp_rate_base2006 = 616

SPECfp_rate2006 = 666

Hardware

CPU Name: SPARC64 VII
 CPU Characteristics:
 CPU MHz: 2880
 FPU: Integrated
 CPU(s) enabled: 64 cores, 16 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 to 4 CMUs; each CMU contains 2 or 4 CPU chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip

Software

Operating System: Solaris 10 10/09 (s10s_u8wos_06)
 Compiler: Sun Studio 12 Update 1 plus patches (see notes)
 Auto Parallel: Yes
 File System: ufs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise M8000

SPECfp_rate2006 = 666

SPECfp_rate_base2006 = 616

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Oct-2009

Hardware Availability: Nov-2009

Software Availability: Oct-2009

L3 Cache:	None
Other Cache:	None
Memory:	512 GB (128 x 4 GB), 8-way interleaved
Disk Subsystem:	886 GB mirrored partition on 12 x 146GB 15000RPM SAS disks in each of 2 Sun StorageTek 2530 Array (24 total disk, 12 in each array)
Other Hardware:	None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	127	3259	530	<u>3203</u>	<u>539</u>	3203	539	127	3259	530	<u>3203</u>	<u>539</u>	3203	539	3203	539
416.gamess	127	3203	776	<u>3238</u>	<u>768</u>	3242	767	127	2678	929	<u>2678</u>	<u>929</u>	2731	911		
433.milc	127	4087	285	4069	287	<u>4072</u>	<u>286</u>	127	4062	287	4080	286	<u>4063</u>	<u>287</u>		
434.zeusmp	127	1626	711	1643	704	<u>1634</u>	<u>707</u>	127	1626	711	1643	704	<u>1634</u>	<u>707</u>		
435.gromacs	127	<u>936</u>	<u>968</u>	941	963	935	970	127	867	1050	<u>858</u>	<u>1060</u>	845	1070		
436.cactusADM	127	<u>1519</u>	<u>999</u>	1513	1000	1527	994	127	<u>1519</u>	<u>999</u>	1513	1000	1527	994		
437.leslie3d	127	<u>3120</u>	<u>383</u>	3126	382	3100	385	127	3023	395	3013	396	<u>3015</u>	<u>396</u>		
444.namd	127	1091	934	<u>1092</u>	<u>933</u>	1100	926	127	995	1020	990	1030	<u>992</u>	<u>1030</u>		
447.dealII	127	1099	1320	1089	1330	<u>1089</u>	<u>1330</u>	127	1099	1320	1089	1330	<u>1089</u>	<u>1330</u>		
450.soplex	127	3399	312	3388	313	<u>3393</u>	<u>312</u>	127	3399	312	3388	313	<u>3393</u>	<u>312</u>		
453.povray	127	615	1100	616	1100	<u>616</u>	<u>1100</u>	127	510	1330	<u>507</u>	<u>1330</u>	503	1340		
454.calculix	127	1020	1030	<u>1019</u>	<u>1030</u>	1018	1030	127	1019	1030	<u>1019</u>	<u>1030</u>	1013	1030		
459.GemsFDTD	127	5050	267	5038	267	<u>5043</u>	<u>267</u>	127	4679	288	<u>4661</u>	<u>289</u>	4647	290		
465.tonto	127	<u>1605</u>	<u>779</u>	1601	781	1606	778	127	1494	836	<u>1482</u>	<u>843</u>	1477	846		
470.lbm	127	5214	335	5213	335	<u>5213</u>	<u>335</u>	1	23.7	579	<u>24.0</u>	<u>574</u>	24.1	570		
481.wrf	127	<u>2339</u>	<u>606</u>	2342	606	2330	609	127	<u>2339</u>	<u>606</u>	2342	606	2330	609		
482.sphinx3	127	5334	464	<u>5297</u>	<u>467</u>	5287	468	127	<u>5184</u>	<u>477</u>	5182	478	5190	477		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Sun Studio 12 Update 1 was used, plus patch 119963-17

Sun Studio compiler patches are available at
http://developers.sun.com/sunstudio/downloads/patches/ss12u1_patches.jsp

Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise M8000

SPECfp_rate2006 = 666

SPECfp_rate_base2006 = 616

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Oct-2009

Hardware Availability: Nov-2009

Software Availability: Oct-2009

Submit Notes (Continued)

the pbind commands. (For details, please see the config file.)

Operating System Notes

Other System Settings:

The webconsole service was turned off using
svcadm disable webconsole

Platform Notes

Memory is 8-way interleaved by filling all slots with
the same capacity DIMMs.

This result is measured on a Sun SPARC Enterprise M8000
Server. The Sun SPARC Enterprise M8000 and the Fujitsu
SPARC Enterprise M8000 are electrically equivalent.

General Notes

Environment variables set by runspec before the start of the run:

OMP_NUM_THREADS = "128"
SUNW_MP_PROCBIND = "true"
SUNW_MP_THR_IDLE = "SPIN"

447.dealII (peak): "apache_stdcxx_4_2_1" src.alt was used.

447.dealII (base): "apache_stdcxx_4_2_1" src.alt was used.

Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise M8000

SPECfp_rate2006 = 666

SPECfp_rate_base2006 = 616

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Oct-2009

Hardware Availability: Nov-2009

Software Availability: Oct-2009

Base Optimization Flags

C benchmarks:

```
-fast -fma=fused -xipo=2 -xpagesize=4M -xalias_level=std  
-xprefetch_auto_type=indirect_array_access -xprefetch_level=3
```

C++ benchmarks:

```
-xdepend -fast -fma=fused -xipo=2 -xppagesize=4M  
-xalias_level=compatible -xprefetch=latx:0.5 -library=no%Cstd  
-I/export/home/apache/stdcxx-4.2.1/include  
-I/export/home/apache/stdcxx-4.2.1/build/include  
-L/export/home/apache/stdcxx-4.2.1/build/lib  
-R/export/home/apache/stdcxx-4.2.1/build/lib -lstd8d
```

Fortran benchmarks:

```
-fast -fma=fused -xipo=2 -xpatesize=4M -xprefetch_level=2
```

Benchmarks using both Fortran and C:

```
-fast(cc) -fast(f90) -fma=fused -xipo=2 -xpatesize=4M  
-xalias_level=std -xprefetch_auto_type=indirect_array_access  
-xprefetch_level=3 -xprefetch_level=2
```

Base Other Flags

C benchmarks:

```
-xjobs=32 -V -#
```

C++ benchmarks:

```
-xjobs=32 -verbose=diags,version
```

Fortran benchmarks:

```
-xjobs=32 -V -v
```

Benchmarks using both Fortran and C:

```
-xjobs=32 -V -# -v
```

Peak Compiler Invocation

C benchmarks:

```
cc
```

C++ benchmarks:

```
CC
```

Fortran benchmarks:

```
f90
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise M8000

SPECfp_rate2006 = 666

SPECfp_rate_base2006 = 616

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Oct-2009

Hardware Availability: Nov-2009

Software Availability: Oct-2009

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

cc f90

Peak Optimization Flags

C benchmarks:

```
433.milc: -fast -xpagesize=4M -fma=fused -xipo=2 -xprefetch_level=2  
          -fsimple=1 -xprefetch_auto_type=indirect_array_access  
          -W2,-Ainline:rs=400 -xalias_level=std
```

```
470.lbm: -fast -xpagesize=4M -xprefetch_level=3 -xipo=2 -fma=fused  
          -xvector -xarch=generic -xautopar -xreduction
```

```
482.sphinx3: -xprofile=collect:./feedback(pass 1)  
             -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
             -fma=fused -xipo=2 -xinline= -xprefetch=no%auto  
             -xalias_level=strong -lfast -ll2amm
```

C++ benchmarks:

```
444.namd: -xdepend -xprofile=collect:./feedback(pass 1)  
          -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
          -xalias_level=compatible -library=stlport4 -fma=fused  
          -xipo=2 -xprefetch=no%auto -xlinkopt=2
```

447.dealII: basepeak = yes

450.soplex: basepeak = yes

```
453.povray: -xdepend -xprofile=collect:./feedback(pass 1)  
            -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
            -xalias_level=compatible -library=stlport4 -xipo=2  
            -xlinkopt=2
```

Fortran benchmarks:

410.bwaves: basepeak = yes

```
416.gamess: -xprofile=collect:./feedback(pass 1)  
            -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
            -fma=fused -xipo=2 -xprefetch=no%auto
```

434.zeusmp: basepeak = yes

437.leslie3d: -fast -xpagesize=4M -xprefetch=no

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise M8000

SPECfp_rate2006 = 666

SPECfp_rate_base2006 = 616

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Oct-2009

Hardware Availability: Nov-2009

Software Availability: Oct-2009

Peak Optimization Flags (Continued)

459.GemsFDTD: -fast -xpagesize=4M -fma=fused -fsimple=1 -xprefetch=no

465.tonto: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xipo=2 -xprefetch=no -lfast -ll2amm

Benchmarks using both Fortran and C:

435.gromacs: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xpagesize=4M -fma=fused -xipo=2 -xchip=generic -xinline=
-fsimple=0

436.cactusADM: basepeak = yes

454.calculix: -fast(cc) -fast(f90) -xpagesize=4M -fma=fused -xipo=2
-xprefetch_level=1 -xalias_level=std
-xprefetch_auto_type=indirect_array_access

481.wrf: basepeak = yes

Peak Other Flags

C benchmarks:

-xjobs=32 -V -#

C++ benchmarks:

-xjobs=32 -verbose=diags,version

Fortran benchmarks:

-xjobs=32 -V -v

Benchmarks using both Fortran and C:

-xjobs=32 -V -# -v

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-12u1-and-gccfss4.2.r4.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-12u1-and-gccfss4.2.r4.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 666

Sun SPARC Enterprise M8000

SPECfp_rate_base2006 = 616

CPU2006 license: 6

Test date: Oct-2009

Test sponsor: Sun Microsystems

Hardware Availability: Nov-2009

Tested by: Sun Microsystems

Software Availability: Oct-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 04:23:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 October 2009.