



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint®_rate2006 = 127

Servidor Itautec MX203 (Intel Xeon X5560)

SPECint_rate_base2006 = 119

CPU2006 license: 9001


Test date: Oct-2009

Test sponsor: Itautec

Hardware Availability: Mar-2009

Tested by: Itautec

Software Availability: Feb-2009

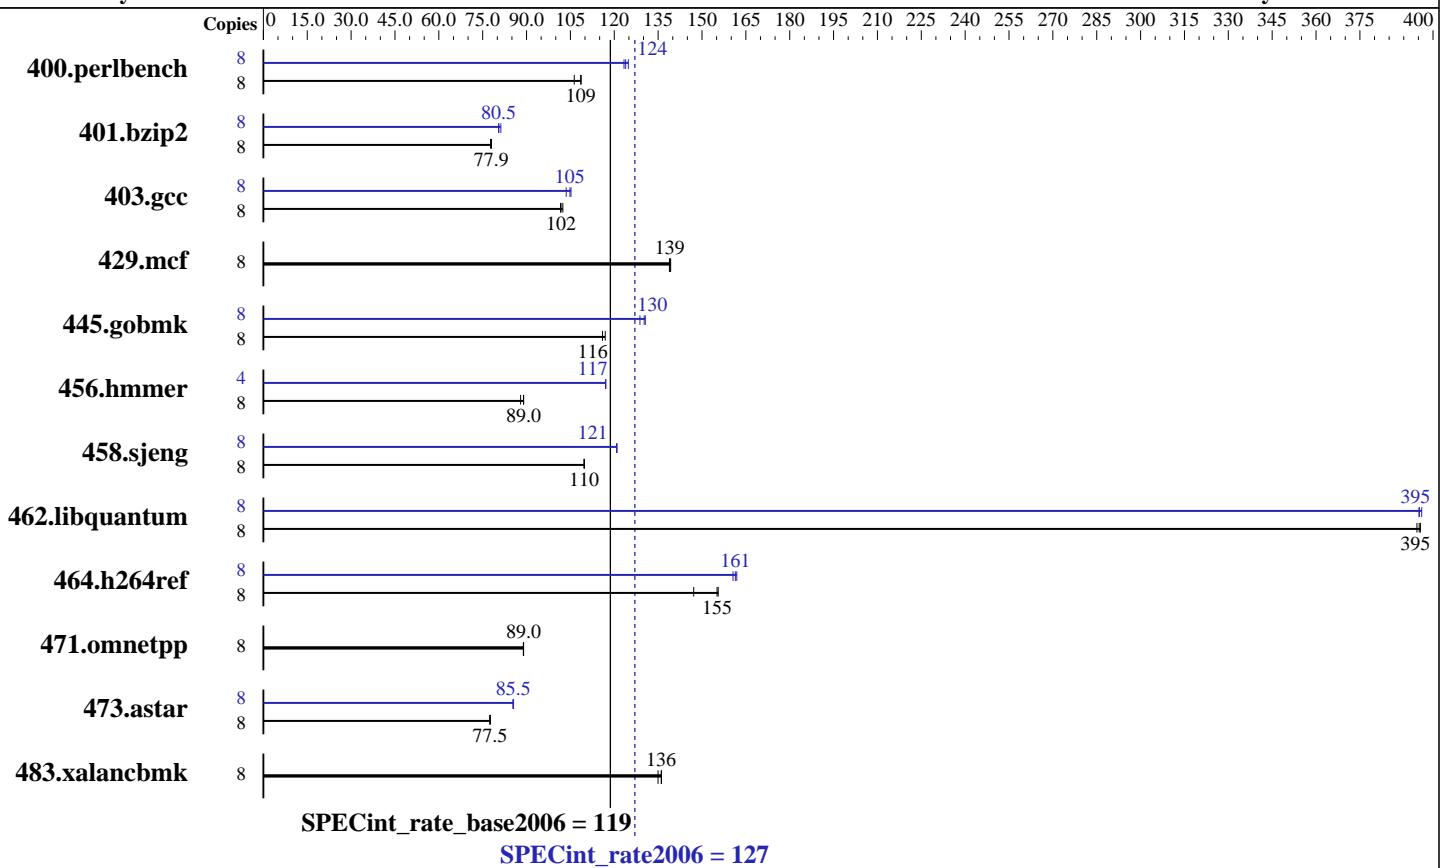

Hardware

CPU Name:	Intel Xeon X5560
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1, 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	12 GB (3 x 4GB DDR3-1333, CL 9, ECC)
Disk Subsystem:	1 x 160 GB SATA-2, 7200RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64)
	SP2 with patch Linux kernel 20090119,
	Kernel 2.6.16.60-0.34-smp
Compiler:	Intel C++ Compiler 11.0 for Linux
	Build 20090131 Package ID: l_cproc_p_11.0.081
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1
	Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 127

Servidor Itautec MX203 (Intel Xeon X5560)

SPECint_rate_base2006 = 119

CPU2006 license: 9001

Test date: Oct-2009

Test sponsor: Itautec

Hardware Availability: Mar-2009

Tested by: Itautec

Software Availability: Feb-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	719	109	735	106	720	109	8	631	124	626	125	634	123
401.bzip2	8	994	77.7	990	78.0	991	77.9	8	959	80.5	959	80.5	950	81.2
403.gcc	8	633	102	629	102	634	102	8	622	104	614	105	612	105
429.mcf	8	525	139	525	139	524	139	8	525	139	525	139	524	139
445.gobmk	8	718	117	724	116	724	116	8	642	131	644	130	652	129
456.hmmer	8	839	89.0	838	89.0	848	88.0	4	319	117	319	117	319	117
458.sjeng	8	882	110	881	110	883	110	8	801	121	801	121	801	121
462.libquantum	8	420	395	419	395	419	396	8	419	395	419	395	418	396
464.h264ref	8	1203	147	1138	156	1141	155	8	1094	162	1097	161	1102	161
471.omnetpp	8	562	89.0	562	89.0	562	88.9	8	562	89.0	562	89.0	562	88.9
473.astar	8	723	77.6	725	77.5	725	77.5	8	658	85.3	657	85.5	656	85.5
483.xalancbmk	8	405	136	406	136	409	135	8	405	136	406	136	409	135

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

General Notes

This result was measured on the Servidor Itautec MX223.
The Servidor Itautec MX203 and the Servidor Itautec MX223 are electronically equivalent.
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX203 (Intel Xeon X5560)

SPECint_rate2006 = 127

CPU2006 license: 9001

Test sponsor: Itautec

Tested by: Itautec

Test date: Oct-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/richard/sh/SmartHeap_8.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc
```

```
401.bzip2: /opt/intel/Compiler/11.0/081/bin/intel64/icc
```

```
456.hmmr: /opt/intel/Compiler/11.0/081/bin/intel64/icc
```

```
458.sjeng: /opt/intel/Compiler/11.0/081/bin/intel64/icc
```

C++ benchmarks (except as noted below):

```
icpc
```

```
473.astar: /opt/intel/Compiler/11.0/081/bin/intel64/icpc
```

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmr: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX203 (Intel Xeon X5560)

SPECint_rate2006 = 127

CPU2006 license: 9001

Test sponsor: Itautec

Tested by: Itautec

Test date: Oct-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
                -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
                -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
          -opt-malloc-options=3

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
            -ipo -no-prec-div -ansi-alias

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
            -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -unroll14 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
                -opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
                -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
                -prof-use(pass 2) -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
            -Wl,-z,muldefs
            -L/home/richard/sh/SmartHeap_8.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX203 (Intel Xeon X5560)

SPECint_rate2006 = 127

CPU2006 license: 9001

Test sponsor: Itautec

Tested by: Itautec

Test date: Oct-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itautec-Intel-ic11.0-int-linux64-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itautec-Intel-ic11.0-int-linux64-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 04:00:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 December 2009.