



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 79.6

PowerEdge T110 (Intel Xeon X3450, 2.66 GHz)

SPECfp_rate_base2006 = 75.6

CPU2006 license: 55


Test date: Sep-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

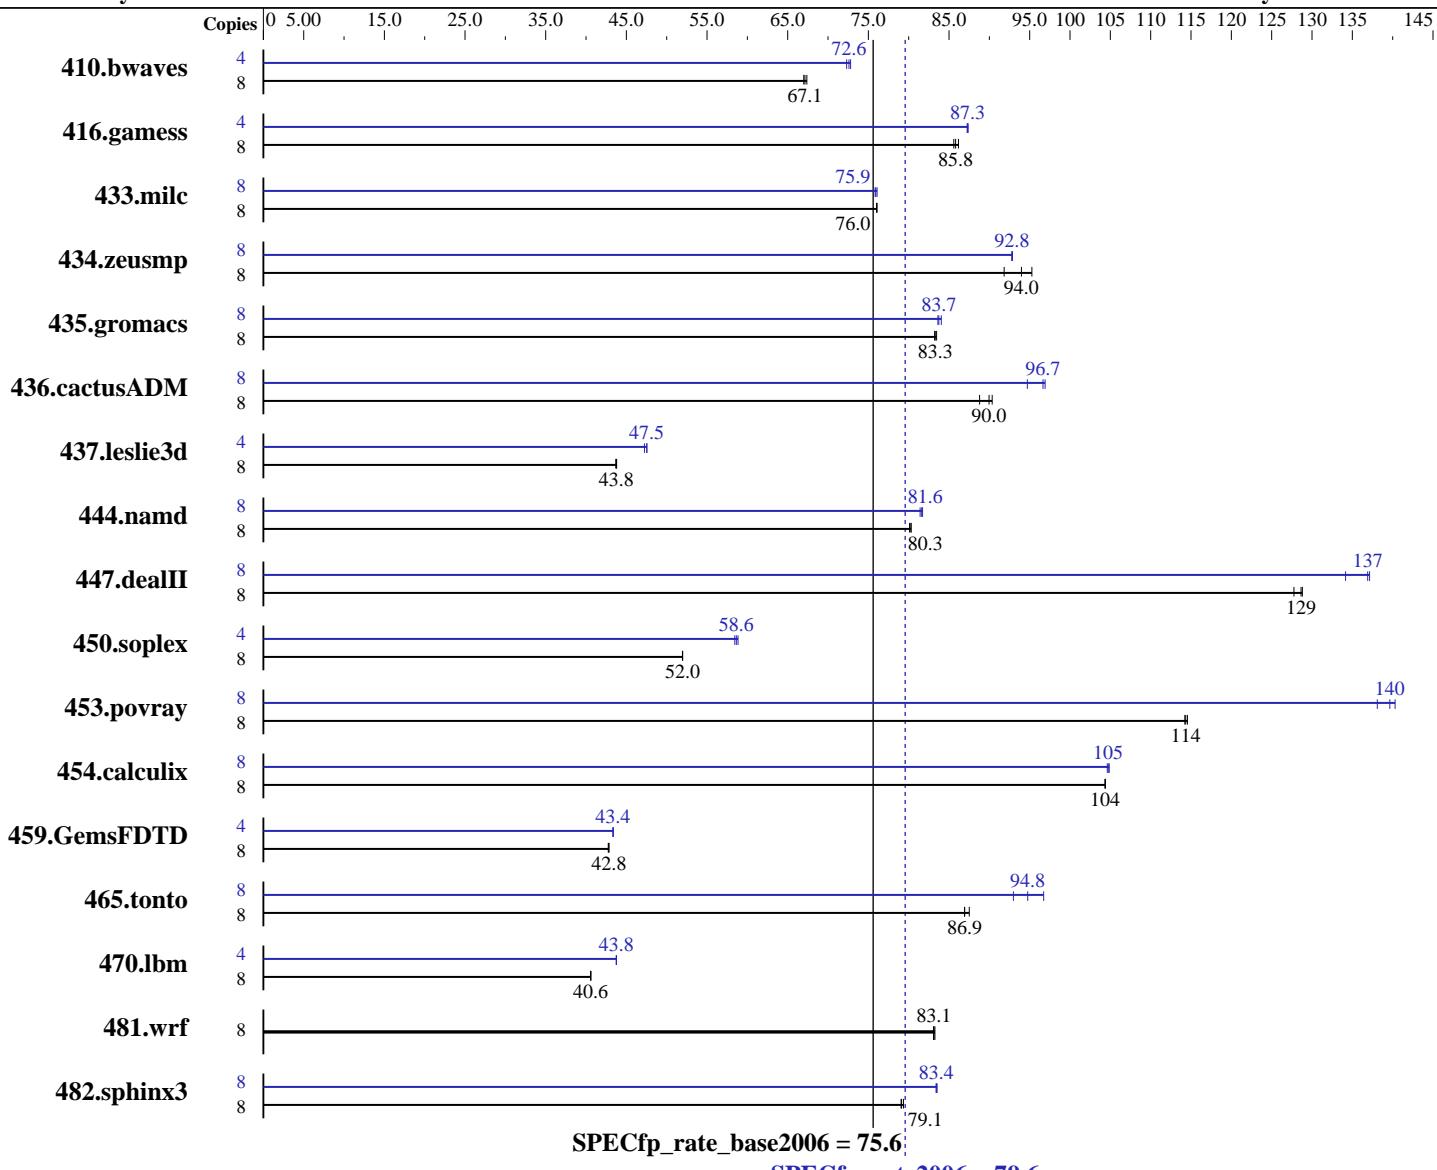

Hardware

CPU Name: Intel Xeon X3450
CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz: 2667
FPU: Integrated
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
Compiler: Intel Fortran Compiler and Intel C++ Compiler Professional Edition 11.1 For Linux Build 20090511 Package ID: l_cproc_p_11.1.040, l_cprof_p_11.1.040
Auto Parallel: No
File System: ReiserFS
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 79.6

PowerEdge T110 (Intel Xeon X3450, 2.66 GHz)

SPECfp_rate_base2006 = 75.6

CPU2006 license: 55

Test date: Sep-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (4 x 2 GB DDR3-1333 DR UDIMM)
 Disk Subsystem: 1 x 160 GB 7200 RPM SATA
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1623	67.0	1614	67.4	1619	67.1	4	752	72.3	747	72.8	749	72.6
416.gamess	8	1818	86.2	1825	85.8	1830	85.6	4	896	87.4	898	87.2	897	87.3
433.milc	8	966	76.0	966	76.0	966	76.0	8	965	76.1	967	75.9	968	75.8
434.zeusmp	8	764	95.3	775	94.0	793	91.8	8	784	92.9	784	92.8	785	92.8
435.gromacs	8	684	83.5	686	83.3	686	83.2	8	683	83.6	680	84.0	682	83.7
436.cactusADM	8	1077	88.8	1058	90.4	1063	90.0	8	1009	94.7	989	96.7	986	96.9
437.leslie3d	8	1717	43.8	1718	43.8	1721	43.7	4	796	47.2	791	47.5	791	47.5
444.namd	8	799	80.3	801	80.1	799	80.3	8	786	81.6	788	81.4	785	81.7
447.dealII	8	711	129	711	129	716	128	8	682	134	667	137	669	137
450.soplex	8	1284	52.0	1284	52.0	1284	52.0	4	571	58.4	569	58.6	567	58.8
453.povray	8	373	114	372	114	372	115	8	305	140	303	140	308	138
454.calculix	8	633	104	632	104	632	104	8	630	105	629	105	631	105
459.GemsFDTD	8	1982	42.8	1982	42.8	1985	42.8	4	979	43.4	979	43.3	979	43.4
465.tonto	8	900	87.5	906	86.9	905	86.9	8	831	94.8	814	96.7	847	93.0
470.lbm	8	2708	40.6	2709	40.6	2708	40.6	4	1256	43.8	1256	43.8	1256	43.8
481.wrf	8	1073	83.3	1075	83.1	1076	83.1	8	1073	83.3	1075	83.1	1076	83.1
482.sphinx3	8	1965	79.4	1971	79.1	1972	79.1	8	1870	83.4	1869	83.4	1867	83.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS Settings:

Power Management = Maximum Performance (Default = Active Power Controller)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 79.6

PowerEdge T110 (Intel Xeon X3450, 2.66 GHz)

SPECfp_rate_base2006 = 75.6

CPU2006 license: 55

Test date: Sep-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

General Notes

The Dell PowerEdge T110 and the Bull NovaScale T810 F2 models are electronically equivalent. This result was measured on a Dell PowerEdge T110.

Base Compiler Invocation

C benchmarks:

 icc -m64

C++ benchmarks:

 icpc -m64

Fortran benchmarks:

 ifort -m64

Benchmarks using both Fortran and C:

 icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 79.6

PowerEdge T110 (Intel Xeon X3450, 2.66 GHz)

SPECfp_rate_base2006 = 75.6

CPU2006 license: 55

Test date: Sep-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks (except as noted below):

ifort -m64

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 79.6

PowerEdge T110 (Intel Xeon X3450, 2.66 GHz)

SPECfp_rate_base2006 = 75.6

CPU2006 license: 55

Test date: Sep-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

Peak Optimization Flags

C benchmarks:

```
433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias
```

```
470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -opt-prefetch -opt-malloc-options=3 -auto-ilp32
```

```
482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
```

C++ benchmarks:

```
444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias -auto-ilp32
```

```
447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -unroll2 -ansi-alias -scalar-rep-
```

```
450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -opt-malloc-options=3
```

```
453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
```

```
416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -unroll2 -Ob0 -ansi-alias -scalar-rep-
```

```
434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
```

```
437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
               -opt-malloc-options=3 -opt-prefetch
```

```
459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
                -unroll2 -Ob0 -opt-prefetch
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 79.6

PowerEdge T110 (Intel Xeon X3450, 2.66 GHz)

SPECfp_rate_base2006 = 75.6

CPU2006 license: 55

Test date: Sep-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

Peak Optimization Flags (Continued)

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -opt-prefetch -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 04:03:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 December 2009.