SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 212 X3 (Intel Xeon E5520)

SPECfp®_rate2006 = 157

SPECfp_rate_base2006 = 152

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Nov-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2009

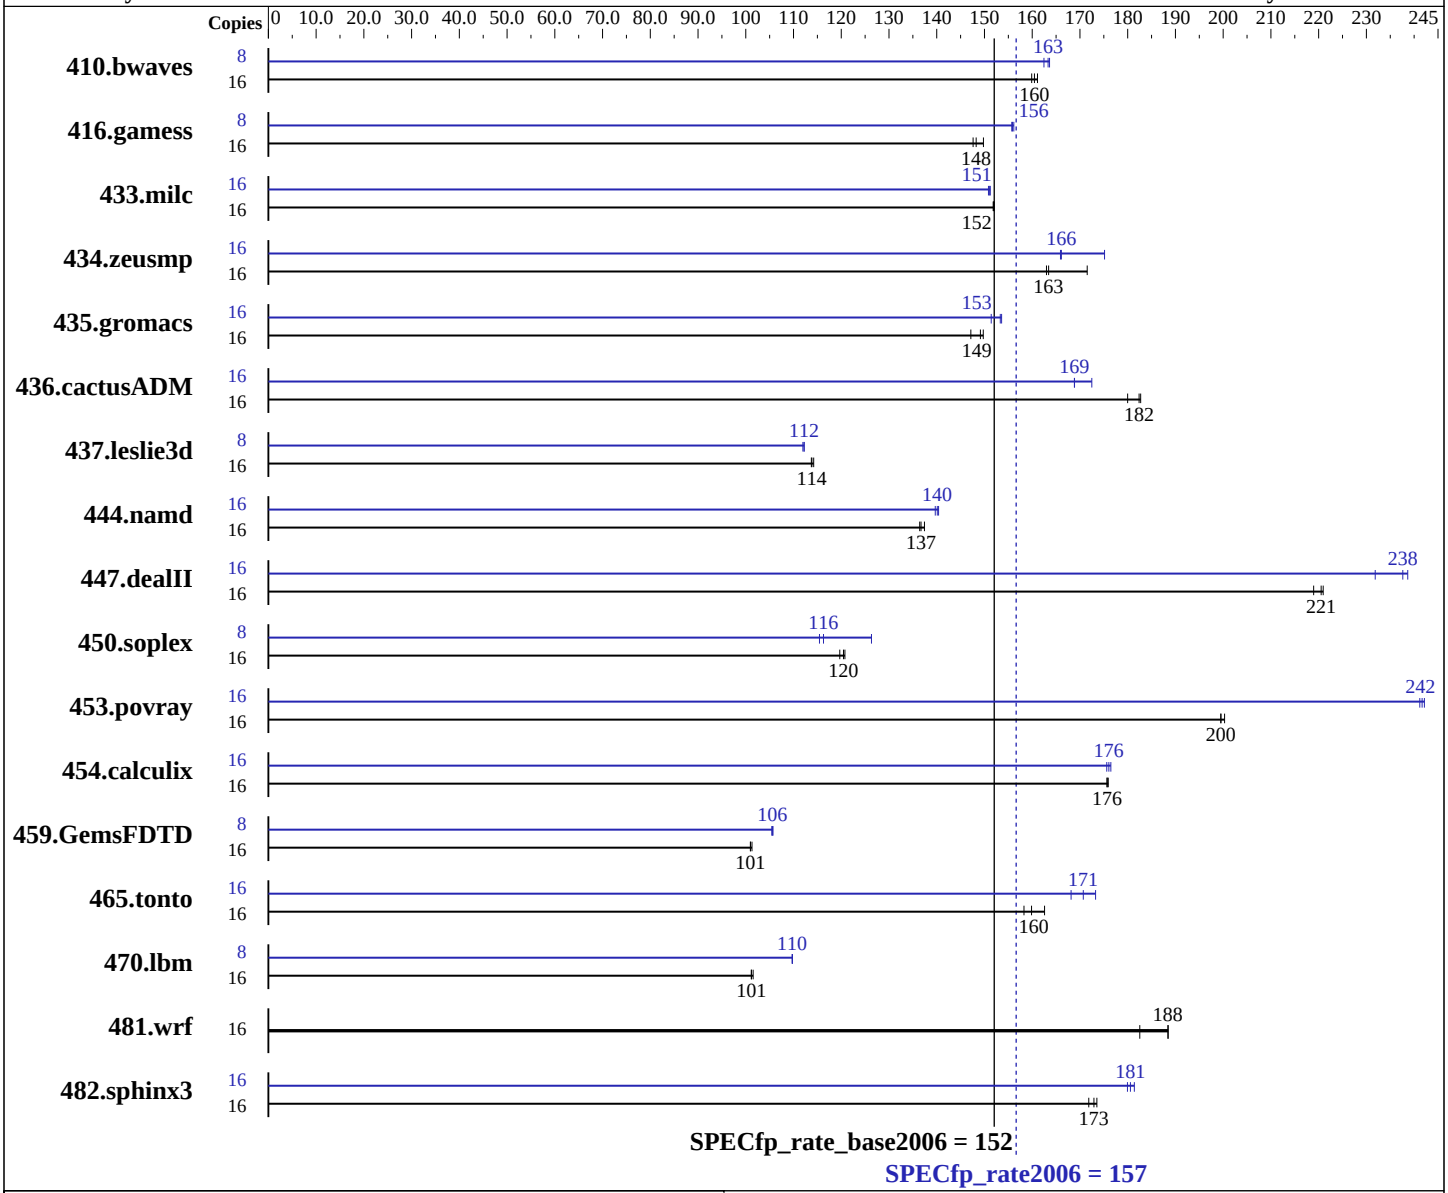

Hardware

CPU Name:	Intel Xeon E5520
CPU Characteristics:	Intel Turbo Boost Technology up to 2.53 GHz
CPU MHz:	2267
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SuSe Linux Enterprise Server 10 (x86_64) with SP2, kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066, l_fproc_p_11.0.066
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 212 X3 (Intel Xeon E5520)

SPECfp_rate2006 = 157

SPECfp_rate_base2006 = 152

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Nov-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2009

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6 x 4 GB PC3-8500, 1066 MHz, DDR3, ECC)
Disk Subsystem: 160 GB SATA, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1360	160	1350	161	**1355**	**160**	8	669	162	664	164	**666**	**163**
416.gamess	16	**2113**	**148**	2092	150	2122	148	8	1003	156	1006	156	**1005**	**156**
433.milc	16	966	152	967	152	**967**	**152**	16	974	151	971	151	**972**	**151**
434.zeusmp	16	849	172	**891**	**163**	893	163	16	831	175	**877**	**166**	878	166
435.gromacs	16	763	150	**766**	**149**	776	147	16	**745**	**153**	744	154	754	151
436.cactusADM	16	**1048**	**182**	1046	183	1062	180	16	**1132**	**169**	1132	169	1109	172
437.leslie3d	16	1322	114	**1321**	**114**	1317	114	8	670	112	**670**	**112**	672	112
444.namd	16	**939**	**137**	934	137	941	136	16	**916**	**140**	914	140	919	140
447.dealII	16	836	219	828	221	**830**	**221**	16	**770**	**238**	767	239	789	232
450.soplex	16	1105	121	1115	120	**1108**	**120**	8	578	115	**574**	**116**	528	126
453.povray	16	427	199	**427**	**200**	425	200	16	**352**	**242**	353	241	352	242
454.calculix	16	750	176	752	176	**751**	**176**	16	752	176	**750**	**176**	748	176
459.GemsFDTD	16	1676	101	**1681**	**101**	1681	101	8	803	106	805	105	**804**	**106**
465.tonto	16	968	163	995	158	**985**	**160**	16	936	168	909	173	**922**	**171**
470.lbm	16	2165	102	2173	101	**2173**	**101**	8	1001	110	**1002**	**110**	1002	110
481.wrf	16	948	188	**949**	**188**	979	183	16	948	188	**949**	**188**	979	183
482.sphinx3	16	**1803**	**173**	1797	174	1815	172	16	1733	180	1719	181	**1727**	**181**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

General Notes

```
'numactl' was used to bind copies to the cores
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
```

Base Compiler Invocation

C benchmarks:

```
icc
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):
icpc

450.soplex: icpc -m32

Fortran benchmarks (except as noted below):
ifort

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2`

C++ benchmarks:

444.namd: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-fno-alias -auto-ilp32`

447.dealII: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -ansi-alias -scalar-rep-`

450.soplex: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-opt-malloc-options=3`

453.povray: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch`

416.gamess: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2)

437.leslie3d: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-opt-malloc-options=3 -opt-prefetch`

459.GemsFDTD: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -Ob0 -opt-prefetch`

465.tonto: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

436.cactusADM: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -opt-prefetch -auto-ilp32`

454.calculix: `-xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32`

481.wrf: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:51:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 December 2009.