SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DP55KG motherboard (Intel Core i7-870)

SPECfp®_rate2006 = 77.0

SPECfp_rate_base2006 = 74.0

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jan-2010
Hardware Availability: Jun-2009
Software Availability: Oct-2009

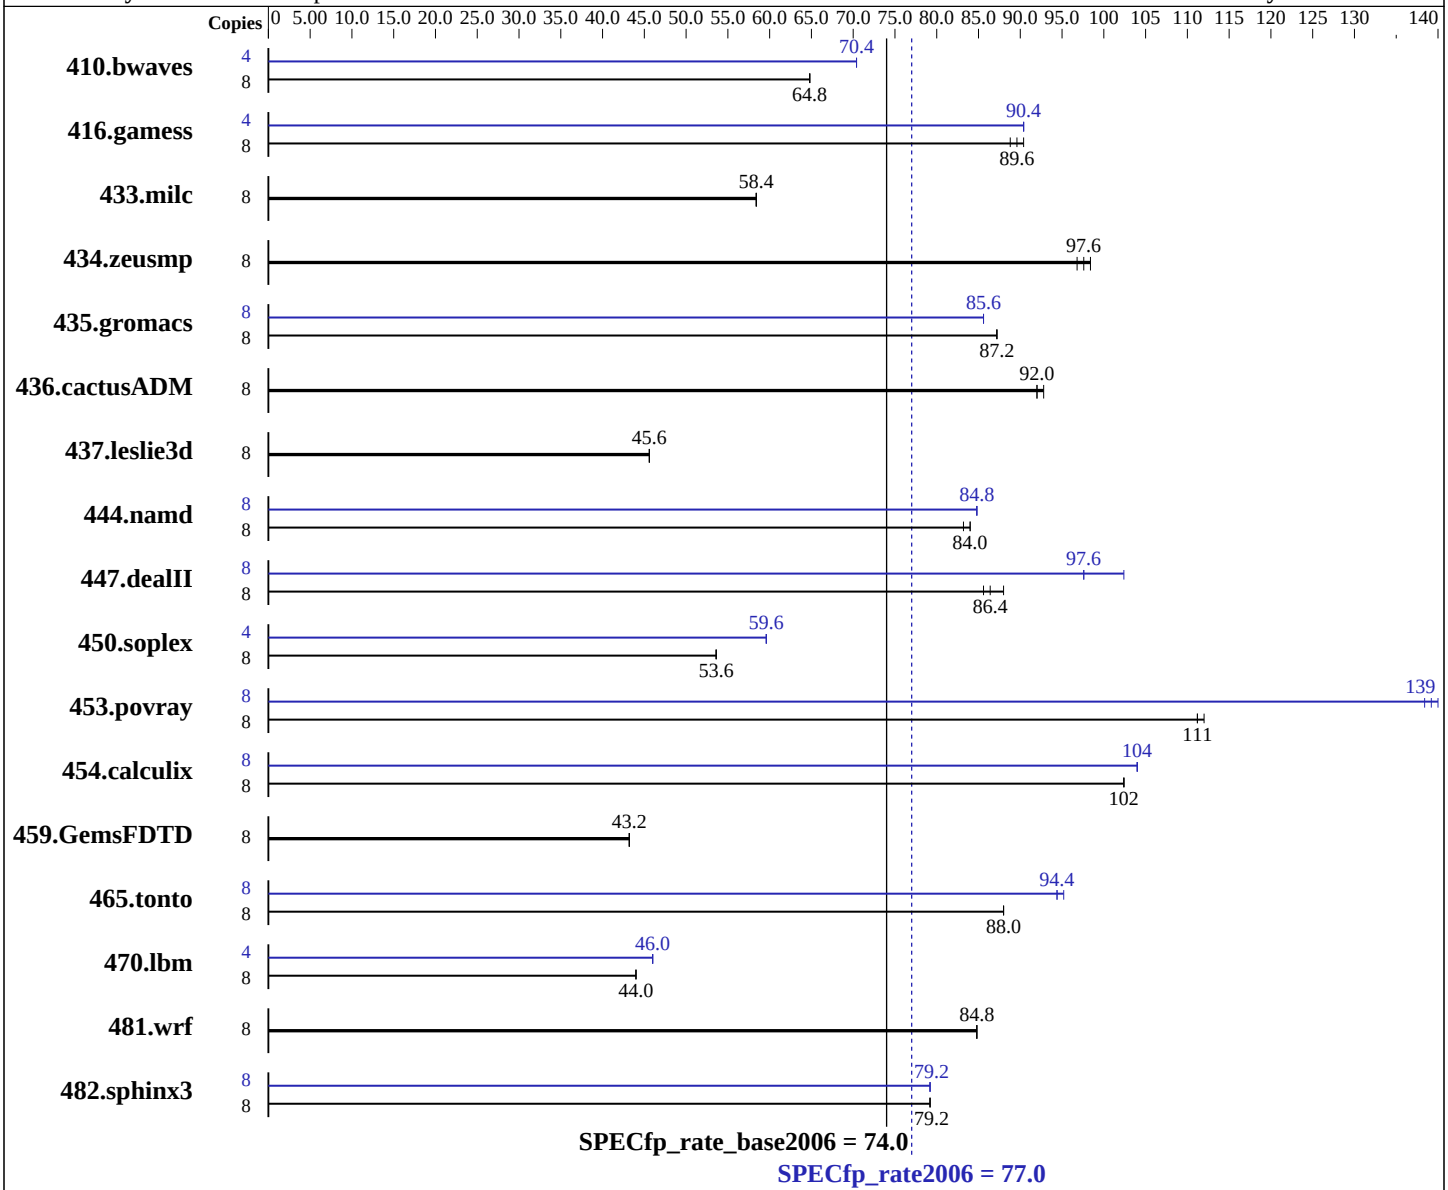

Hardware

CPU Name:	Intel Core i7-870
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2933
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Windows Vista Ultimate w/ SP1 (64-bit)
Compiler:	Intel C++ Compiler Professional 11.1 for Intel 64 Build 20090903 Package ID: w_cproc_p_11.1.045 Intel Visual Fortran Compiler Professional 11.1 for Intel 64 Build 20090903 Package ID: w_cproc_p_11.1.045, w_cprof_p_11.1.045 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
Auto Parallel:	No

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DP55KG motherboard (Intel Core i7-870)

SPECfp_rate2006 = 77.0

SPECfp_rate_base2006 = 74.0

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jan-2010
Hardware Availability: Jun-2009
Software Availability: Oct-2009

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 4 GB (2x2GB Micron MT16JTF25664AZ-1G4 DDR3-1333 CL9)
Disk Subsystem: Intel X25-M 80GB SSD
Other Hardware: None

File System: NTFS
System State: Default
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other Software: None
SmartHeap Library Version 8.1 from http://www.microquill.com/

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1678	64.8	**1680**	**64.8**	1680	64.8	4	773	70.4	**773**	**70.4**	773	70.4
416.gamess	8	1769	88.8	**1744**	**89.6**	1727	90.4	4	865	90.4	**865**	**90.4**	865	90.4
433.milc	8	1262	58.4	**1261**	**58.4**	1261	58.4	8	1262	58.4	**1261**	**58.4**	1261	58.4
434.zeusmp	8	753	96.8	**744**	**97.6**	741	98.4	8	753	96.8	**744**	**97.6**	741	98.4
435.gromacs	8	656	87.2	**655**	**87.2**	653	87.2	8	668	85.6	**665**	**85.6**	665	85.6
436.cactusADM	8	1033	92.8	1041	92.0	**1036**	**92.0**	8	1033	92.8	1041	92.0	**1036**	**92.0**
437.leslie3d	8	1660	45.6	1659	45.6	**1659**	**45.6**	8	1660	45.6	1659	45.6	**1659**	**45.6**
444.namd	8	766	84.0	**766**	**84.0**	768	83.2	8	760	84.8	**760**	**84.8**	758	84.8
447.dealII	8	**1058**	**86.4**	1037	88.0	1067	85.6	8	**934**	**97.6**	892	102	935	97.6
450.soplex	8	1236	53.6	**1237**	**53.6**	1237	53.6	4	559	59.6	**559**	**59.6**	560	59.6
453.povray	8	383	111	**382**	**111**	381	112	8	**305**	**139**	307	138	305	140
454.calculix	8	643	102	642	102	**643**	**102**	8	636	104	636	104	**636**	**104**
459.GemsFDTD	8	**1956**	**43.2**	1955	43.2	1960	43.2	8	**1956**	**43.2**	1955	43.2	1960	43.2
465.tonto	8	**896**	**88.0**	897	88.0	893	88.0	8	**831**	**94.4**	830	95.2	833	94.4
470.lbm	8	2514	44.0	2514	44.0	**2514**	**44.0**	4	1199	46.0	**1199**	**46.0**	1200	46.0
481.wrf	8	1056	84.8	1058	84.8	**1058**	**84.8**	8	1056	84.8	1058	84.8	**1058**	**84.8**
482.sphinx3	8	1963	79.2	**1961**	**79.2**	1961	79.2	8	1963	79.2	**1964**	**79.2**	1966	79.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
Windows start command was used to bind copies to processors
```

General Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
System was configured with an ATI 5970 discrete graphics card
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc9
```

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icl -Qvc9 -Qstd=c99 ifort
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_P64 /Qlowercase
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -Qlowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -Qlowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64
```

Base Optimization Flags

C benchmarks:
```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
/F1000000000            -link /FORCE:MULTIPLE
```

C++ benchmarks:
```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
-Qauto-ilp32 /F1000000000 shlW64M.lib            -link /FORCE:MULTIPLE
```

Fortran benchmarks:
```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000
           -link /FORCE:MULTIPLE
```

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

Peak Compiler Invocation

C benchmarks:
icl -Qvc9 -Qstd=c99

C++ benchmarks:
icl -Qvc9

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

482.sphinx3: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qunroll2 -Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

444.namd: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

447.dealII: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qscalar-rep- -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

453.povray: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32
/F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F1000000000 -link /FORCE:MULTIPLE

416.gamess: Same as 410.bwaves

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
/F1000000000 -link /FORCE:MULTIPLE

436.cactusADM: basepeak = yes

454.calculix: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qauto-ilp32 /F1000000000
-link /FORCE:MULTIPLE

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-winx64-revA.20100302.01.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-winx64-revA.20100302.01.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DP55KG motherboard (Intel Core i7-870)

SPECfp_rate2006 = 77.0

SPECfp_rate_base2006 = 74.0

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jan-2010
Hardware Availability: Jun-2009
Software Availability: Oct-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 06:48:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 March 2010.