SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL490c G6
(2.93 GHz, Intel Xeon X5670)

SPECfp®_rate2006 = 243

SPECfp_rate_base2006 = 234

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Mar-2010
Hardware Availability: Jun-2010
Software Availability: Sep-2009

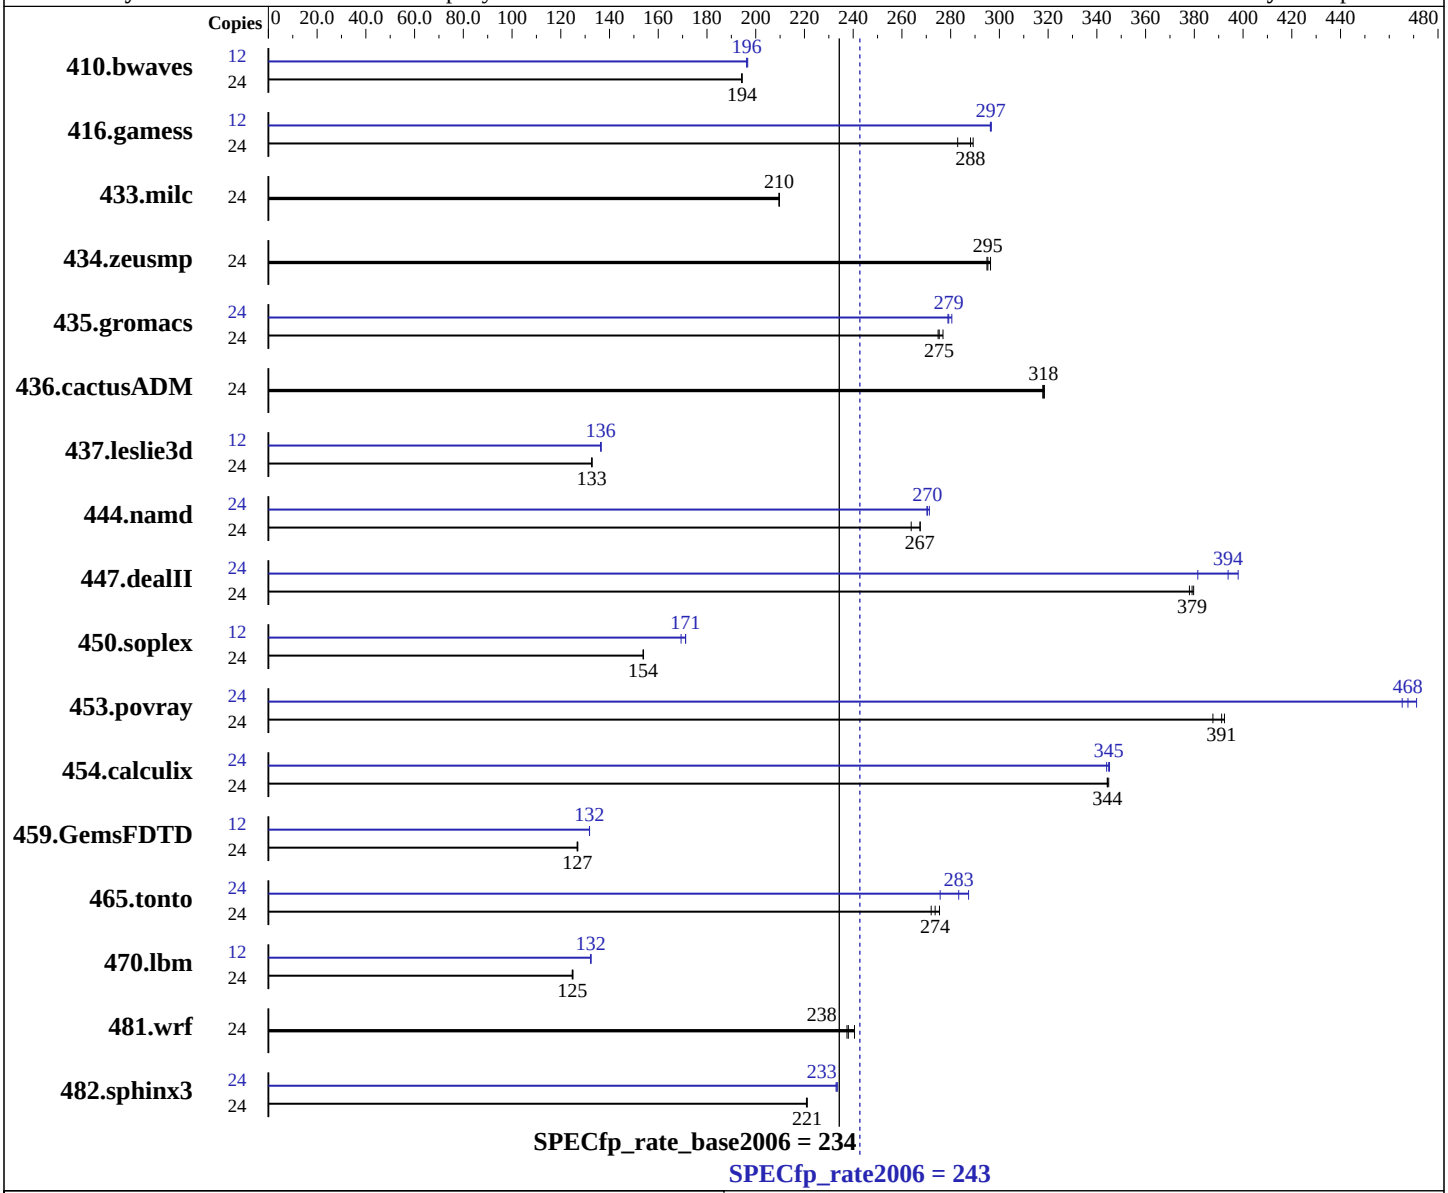

Hardware

CPU Name:	Intel Xeon X5670
CPU Characteristics:	Intel Turbo Boost Technology up to 3.33 GHz
CPU MHz:	2933
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 5.4 Kernel 2.6.18-164.el5
Compiler:	Intel C++ and Fortran Compiler 11.1 for Linux Build 20090827 Package ID: l_cproc_p_11.1.056, l_cprof_p_11.1.056
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL490c G6
(2.93 GHz, Intel Xeon X5670)

SPECfp_rate2006 = 243

SPECfp_rate_base2006 = 234

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Mar-2010
Hardware Availability: Jun-2010
Software Availability: Sep-2009

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12x4 GB PC3-10600R CL9)
Disk Subsystem: 1 x 64 GB SSD SATA
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.17.50.0.18

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1678	194	**1678**	**194**	1680	194	12	831	196	829	197	**830**	**196**
416.gamess	24	1625	289	**1631**	**288**	1661	283	12	793	296	**792**	**297**	792	297
433.milc	24	1051	210	**1051**	**210**	1051	210	24	1051	210	**1051**	**210**	1051	210
434.zeusmp	24	**740**	**295**	741	295	737	296	24	**740**	**295**	741	295	737	296
435.gromacs	24	619	277	623	275	**622**	**275**	24	**614**	**279**	614	279	611	280
436.cactusADM	24	**902**	**318**	901	318	902	318	24	**902**	**318**	901	318	902	318
437.leslie3d	24	1698	133	**1699**	**133**	1700	133	12	826	137	827	136	**827**	**136**
444.namd	24	719	268	**720**	**267**	730	264	24	712	270	710	271	**712**	**270**
447.dealII	24	**724**	**379**	726	378	723	380	24	**697**	**394**	690	398	720	381
450.soplex	24	1301	154	**1301**	**154**	1300	154	12	591	169	**585**	**171**	584	171
453.povray	24	329	388	325	392	**326**	**391**	24	**273**	**468**	274	465	271	471
454.calculix	24	574	345	**575**	**344**	575	344	24	574	345	576	344	**574**	**345**
459.GemsFDTD	24	**2007**	**127**	2010	127	2005	127	12	**966**	**132**	966	132	966	132
465.tonto	24	**863**	**274**	868	272	857	275	24	857	276	822	287	**834**	**283**
470.lbm	24	2638	125	**2642**	**125**	2645	125	12	1246	132	**1246**	**132**	1246	132
481.wrf	24	1114	241	1129	237	**1126**	**238**	24	1114	241	1129	237	**1126**	**238**
482.sphinx3	24	2116	221	**2116**	**221**	2118	221	24	**2005**	**233**	2004	233	2008	233

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
```

Platform Notes

```
BIOS configuration:
 HP Power Profile set to Maximum Performance
 Thermal Configuration set to Increased Cooling
 Memory Speed with 2 DIMMs per Channel set to 1333MHz Maximum
```

Continued on next page

Platform Notes (Continued)

```
Data Reuse set to Disabled
```

Base Compiler Invocation

C benchmarks:
```
icc
```

C++ benchmarks:
```
icpc
```

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icc ifort
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
      444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
      465.tonto: -DSPEC_CPU_LP64
      470.lbm: -DSPEC_CPU_LP64
      481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
  482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static
```

Fortran benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static
```

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/Compiler/11.1/056/bin/intel64/icpc -m32`

Fortran benchmarks (except as noted below):
`ifort`

437.leslie3d: `ifort -m32`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

433.milc: basepeak = yes

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto

Benchmarks using both Fortran and C:

Continued on next page

Peak Optimization Flags (Continued)

435.gromacs: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32`

436.cactusADM: `basepeak = yes`

454.calculix: `-xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20100202.00.html`
`http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20100511.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20100202.00.xml`
`http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20100511.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 06:57:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 May 2010.