



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp®\_rate2006 = 173**

PowerEdge T710 (Intel Xeon E5630, 2.53 GHz)

**SPECfp\_rate\_base2006 = 167**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

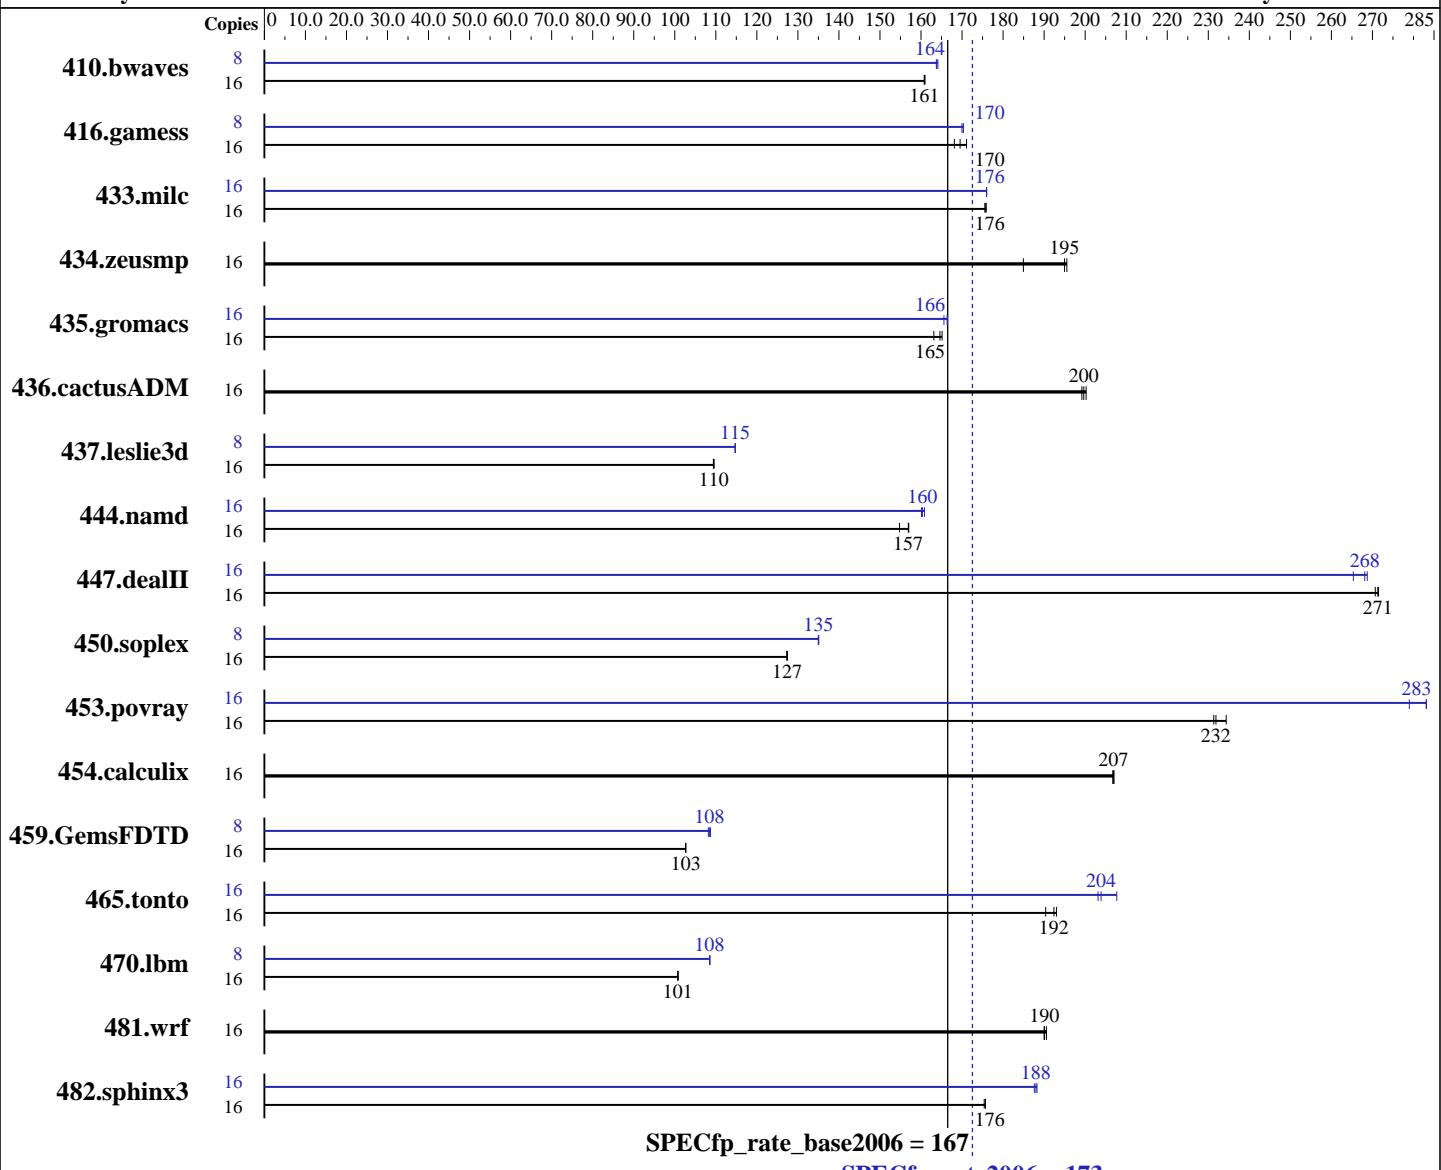

## Hardware

CPU Name: Intel Xeon E5630  
CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
CPU MHz: 2533  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I+ 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-smp  
Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
Auto Parallel: No  
File System: ext3  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 173**

PowerEdge T710 (Intel Xeon E5630, 2.53 GHz)

**SPECfp\_rate\_base2006 = 167**

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6 x 4 GB DDR3-1333 DR RDIMM downclocked to 1066 MHz)  
 Disk Subsystem: 2 x 300 GB 10000 RPM SAS  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	<b>1352</b>	<b>161</b>	1351	161	1352	161	8	664	164	<b>664</b>	<b>164</b>	662	164		
416.gamess	16	1831	171	<b>1848</b>	<b>170</b>	1863	168	8	920	170	922	170	<b>920</b>	<b>170</b>		
433.milc	16	835	176	837	176	<b>836</b>	<b>176</b>	16	<b>835</b>	<b>176</b>	834	176	835	176		
434.zeusmp	16	787	185	<b>747</b>	<b>195</b>	745	196	16	787	185	<b>747</b>	<b>195</b>	745	196		
435.gromacs	16	692	165	700	163	<b>694</b>	<b>165</b>	16	<b>687</b>	<b>166</b>	690	166	686	166		
436.cactusADM	16	<b>958</b>	<b>200</b>	955	200	960	199	16	<b>958</b>	<b>200</b>	955	200	960	199		
437.leslie3d	16	1375	109	1373	110	<b>1373</b>	<b>110</b>	8	655	115	<b>655</b>	<b>115</b>	655	115		
444.namd	16	817	157	829	155	<b>818</b>	<b>157</b>	16	801	160	<b>800</b>	<b>160</b>	798	161		
447.dealII	16	674	271	<b>675</b>	<b>271</b>	676	271	16	<b>683</b>	<b>268</b>	681	269	690	265		
450.soplex	16	1048	127	1047	127	<b>1047</b>	<b>127</b>	8	<b>494</b>	<b>135</b>	494	135	494	135		
453.povray	16	<b>367</b>	<b>232</b>	368	231	363	234	16	305	279	<b>301</b>	<b>283</b>	301	283		
454.calculix	16	<b>638</b>	<b>207</b>	639	207	638	207	16	<b>638</b>	<b>207</b>	639	207	638	207		
459.GemsFDTD	16	1654	103	1653	103	<b>1653</b>	<b>103</b>	8	785	108	<b>783</b>	<b>108</b>	781	109		
465.tonto	16	<b>818</b>	<b>192</b>	816	193	827	190	16	758	208	775	203	<b>772</b>	<b>204</b>		
470.lbm	16	2180	101	<b>2182</b>	<b>101</b>	2183	101	8	1012	109	1013	108	<b>1013</b>	<b>108</b>		
481.wrf	16	941	190	938	191	<b>940</b>	<b>190</b>	16	941	190	938	191	<b>940</b>	<b>190</b>		
482.sphinx3	16	<b>1775</b>	<b>176</b>	1778	175	1775	176	16	<b>1659</b>	<b>188</b>	1656	188	1662	188		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS Settings:

Power Management = Maximum Performance (Default = Active Power Controller)

Data Reuse = Disabled (Default = Enabled)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T710 (Intel Xeon E5630, 2.53 GHz)

**SPECfp\_rate2006 = 173**

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

## General Notes

The Dell PowerEdge T710 and  
the Bull NovaScale T860 F2 models are electronically equivalent.  
The results have been measured on a Dell PowerEdge T710 model

## Base Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
416.gamess: `-DSPEC_CPU_LP64`  
    433.milc: `-DSPEC_CPU_LP64`  
434.zeusmp: `-DSPEC_CPU_LP64`  
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
437.leslie3d: `-DSPEC_CPU_LP64`  
    444.namd: `-DSPEC_CPU_LP64`  
    447.dealII: `-DSPEC_CPU_LP64`  
    450.soplex: `-DSPEC_CPU_LP64`  
    453.povray: `-DSPEC_CPU_LP64`  
    454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
459.GemsFDTD: `-DSPEC_CPU_LP64`  
    465.tonto: `-DSPEC_CPU_LP64`  
    470.lbm: `-DSPEC_CPU_LP64`  
    481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`  
482.sphinx3: `-DSPEC_CPU_LP64`

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T710 (Intel Xeon E5630, 2.53 GHz)

**SPECfp\_rate2006 = 173**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T710 (Intel Xeon E5630, 2.53 GHz)

**SPECfp\_rate2006 = 173**

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias -opt-prefetch
```

```
470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -opt-malloc-options=3 -ansi-alias -auto-ilp32
```

```
482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
```

C++ benchmarks:

```
444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias -auto-ilp32
```

```
447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -unroll2 -ansi-alias -scalar-rep-
```

```
450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -opt-malloc-options=3
```

```
453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
```

```
416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -unroll2 -Obo -ansi-alias -scalar-rep-
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static
```

```
459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
               -unroll2 -Obo
```

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
            -unroll4 -auto -inline-calloc -opt-malloc-options=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T710 (Intel Xeon E5630, 2.53 GHz)

**SPECfp\_rate2006 = 173**

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
435.gromacs: -xSSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
               -opt-prefetch -auto-ilp32
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: basepeak = yes
```

```
481.wrf: basepeak = yes
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 07:33:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 April 2010.