



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8DTL-3F (Intel Xeon W5590, 3.33GHz)

SPECint_rate2006 = 282

SPECint_rate_base2006 = 267

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2010

Hardware Availability: Sep-2009

Software Availability: Nov-2009

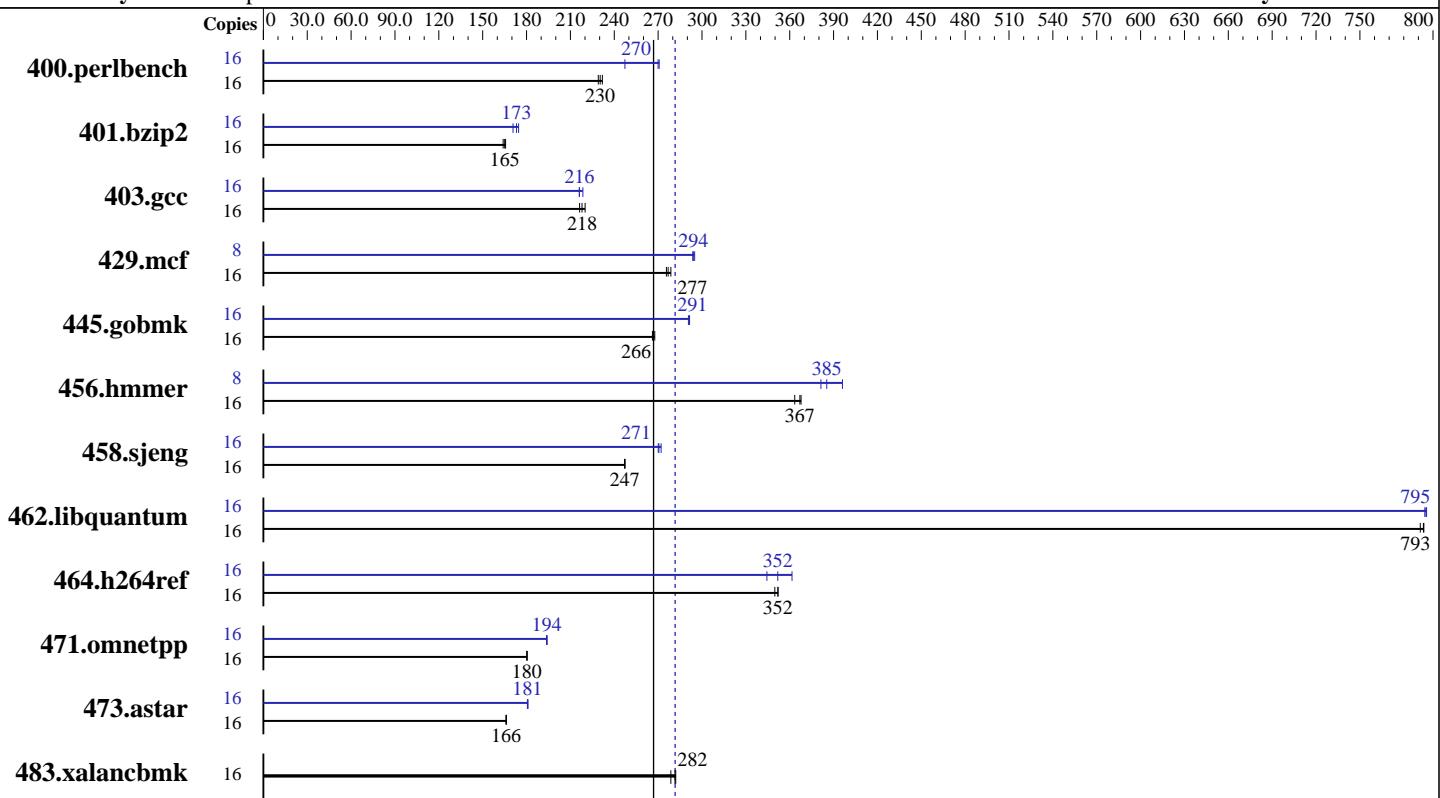

SPECint_rate_base2006 = 267

SPECint_rate2006 = 282

Hardware

CPU Name: Intel Xeon W5590
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz: 3333
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6 x 4 GB DDR3-1333 RDIMM, ECC, CL9)
Disk Subsystem: 1 x 300 GB SATA II, 7200 RPM
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
Compiler: Kernel 2.6.27.19-5-default
Auto Parallel: Intel C++ Professional Compiler for IA32 and
File System: Intel 64, Version 11.1
System State: Build 20091130 Package ID: l_cproc_p_11.1.064
Base Pointers: No
Peak Pointers: ReiserFS
Other Software: System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8DTL-3F (Intel Xeon W5590, 3.33GHz)

SPECint_rate2006 = 282

SPECint_rate_base2006 = 267

CPU2006 license: 001176

Test date: Apr-2010

Test sponsor: Supermicro

Hardware Availability: Sep-2009

Tested by: Supermicro

Software Availability: Nov-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	682	229	679	230	674	232	16	577	271	579	270	632	247
401.bzip2	16	941	164	935	165	932	166	16	904	171	892	173	884	175
403.gcc	16	591	218	585	220	596	216	16	589	219	596	216	596	216
429.mcf	16	527	277	529	276	524	279	8	248	294	248	294	247	295
445.gobmk	16	627	268	630	266	631	266	16	576	291	576	291	577	291
456.hammer	16	407	367	411	363	406	368	8	194	385	188	396	196	381
458.sjeng	16	784	247	783	247	783	247	16	716	271	712	272	717	270
462.libquantum	16	418	794	419	791	418	793	16	417	795	417	794	417	796
464.h264ref	16	1006	352	1006	352	1012	350	16	979	362	1006	352	1028	344
471.omnetpp	16	555	180	555	180	555	180	16	516	194	515	194	516	194
473.astar	16	676	166	676	166	677	166	16	621	181	622	181	621	181
483.xalancbmk	16	396	279	391	282	392	282	16	396	279	391	282	392	282

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was set for stacksize unlimited

Platform Notes

Fan speed set to Full Speed in BIOS Setup.
As tested, the system used a COMPUWARE
CPS-5611-3A2LF power supply, 2 SNK-P0035AP4 heatsinks,
and 1 EVERCOOL EC6025H12S,
2 Nidec UltraFlo T92T12MMA7-57 T072 cooling fans.

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

Base Compiler Invocation

C benchmarks:
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8DTL-3F (Intel Xeon W5590, 3.33GHz)

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

SPECint_rate2006 = 282

SPECint_rate_base2006 = 267

Test date: Apr-2010

Hardware Availability: Sep-2009

Software Availability: Nov-2009

Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

401.bzip2: `icc -m64`

456.hmmr: `icc -m64`

458.sjeng: `icc -m64`

462.libquantum: `icc -m64`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8DTL-3F (Intel Xeon W5590, 3.33GHz)

SPECint_rate2006 = 282

SPECint_rate_base2006 = 267

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2010

Hardware Availability: Sep-2009

Software Availability: Nov-2009

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll12
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll14 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libicl1.1-32bit -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8DTL-3F (Intel Xeon W5590, 3.33GHz)

SPECint_rate2006 = 282

SPECint_rate_base2006 = 267

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2010

Hardware Availability: Sep-2009

Software Availability: Nov-2009

Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
           -L/home/cmpllr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

```
483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 06:55:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 May 2010.