



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 32.1

IBM System x3650 M3 (Intel Xeon L5630)

SPECfp_base2006 = 30.2

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2010

Hardware Availability: Jun-2010

Software Availability: Jan-2010

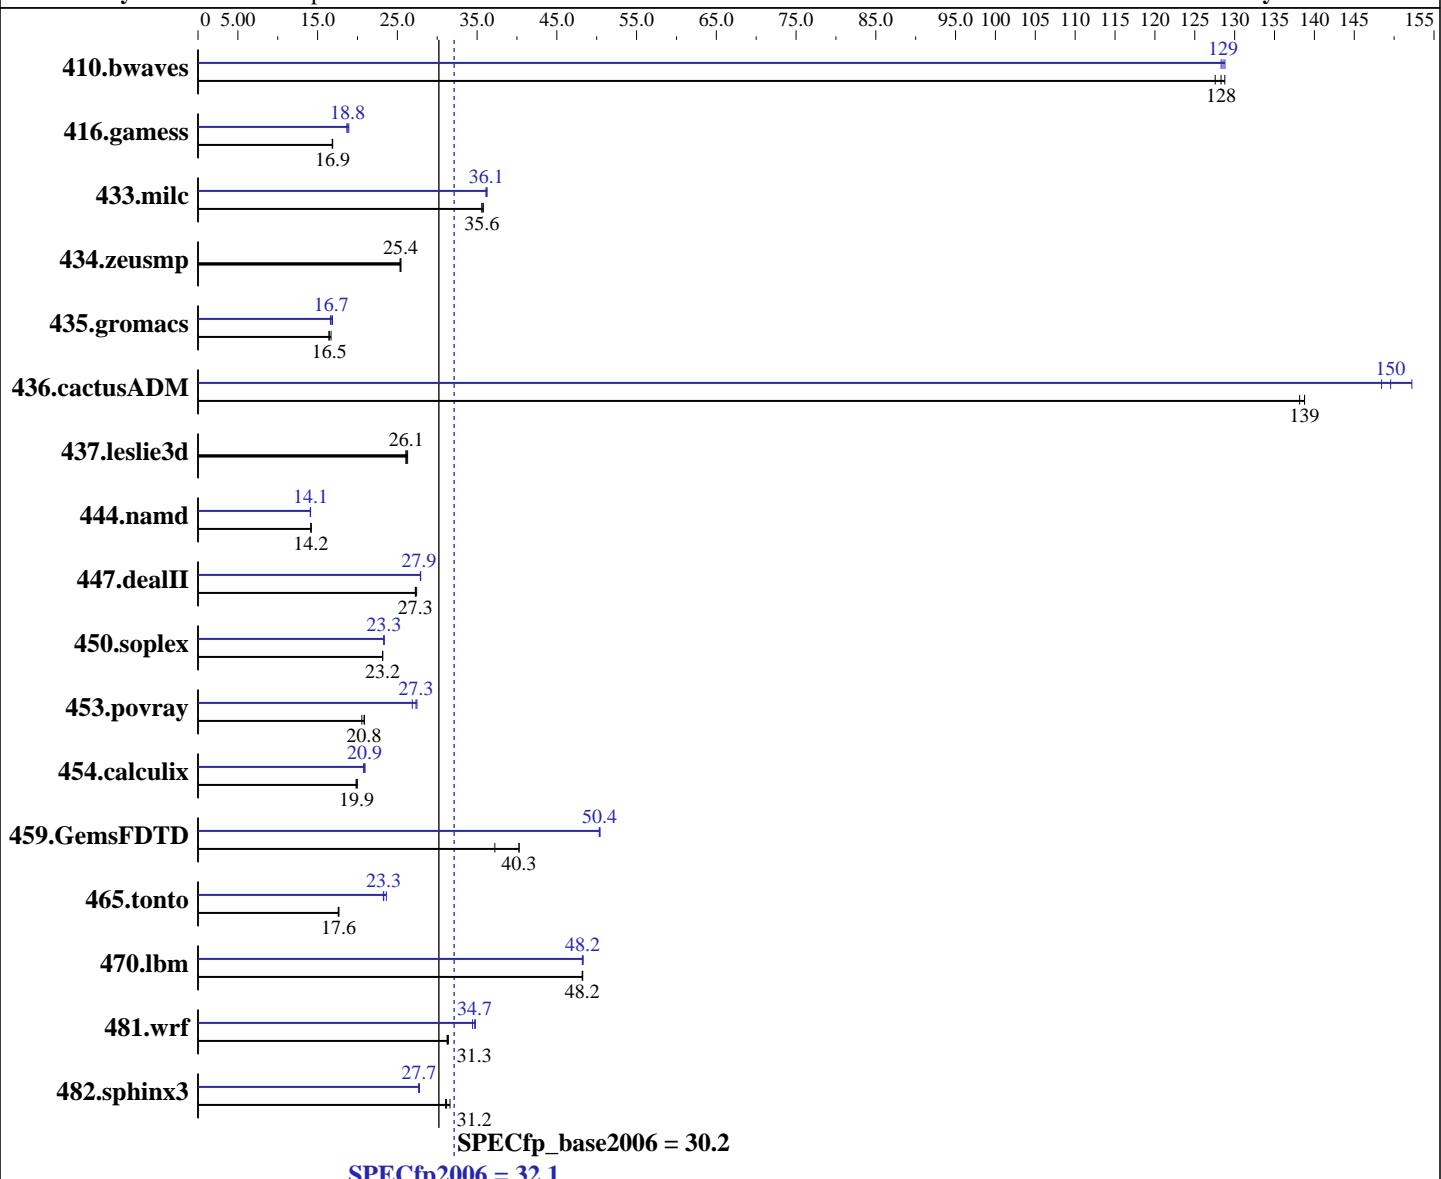

Hardware

CPU Name: Intel Xeon L5630
CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz
CPU MHz: 2133
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SuSe Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
Auto Parallel: Yes
File System: ext3
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation		SPECfp2006 = 32.1	
IBM System x3650 M3 (Intel Xeon L5630)		SPECfp_base2006 = 30.2	
CPU2006 license:	11	Test date:	May-2010
Test sponsor:	IBM Corporation	Hardware Availability:	Jun-2010
Tested by:	IBM Corporation	Software Availability:	Jan-2010
L3 Cache:	12 MB I+D on chip per chip	Base Pointers:	64-bit
Other Cache:	None	Peak Pointers:	32/64-bit
Memory:	48 GB (12 x 4 GB PC3-10600R-ECC, CL9)	Other Software:	None
Disk Subsystem:	1 x 73 GB SAS, 15000RPM		
Other Hardware:	None		

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	107	128	106	129	<u>106</u>	<u>128</u>	<u>106</u>	<u>129</u>	106	128	106	129
416.gamess	1163	16.8	<u>1160</u>	<u>16.9</u>	1160	16.9	<u>1035</u>	<u>18.9</u>	<u>1043</u>	<u>18.8</u>	1049	18.7
433.milc	258	35.6	257	35.8	<u>258</u>	<u>35.6</u>	<u>253</u>	<u>36.3</u>	254	36.1	<u>254</u>	<u>36.1</u>
434.zeusmp	<u>358</u>	<u>25.4</u>	358	25.5	359	25.3	<u>358</u>	<u>25.4</u>	358	25.5	359	25.3
435.gromacs	428	16.7	<u>434</u>	<u>16.5</u>	435	16.4	423	16.9	<u>427</u>	<u>16.7</u>	430	16.6
436.cactusADM	<u>86.1</u>	<u>139</u>	86.1	139	86.5	138	80.5	148	78.5	152	<u>79.9</u>	<u>150</u>
437.leslie3d	361	26.1	<u>360</u>	<u>26.1</u>	358	26.3	361	26.1	<u>360</u>	<u>26.1</u>	358	26.3
444.namd	565	14.2	567	14.2	<u>566</u>	<u>14.2</u>	<u>568</u>	<u>14.1</u>	570	14.1	568	14.1
447.dealII	417	27.4	<u>419</u>	<u>27.3</u>	420	27.3	410	27.9	<u>410</u>	<u>27.9</u>	410	27.9
450.soplex	360	23.1	<u>360</u>	<u>23.2</u>	360	23.2	<u>357</u>	<u>23.4</u>	<u>358</u>	<u>23.3</u>	358	23.3
453.povray	259	20.5	<u>255</u>	<u>20.8</u>	255	20.9	<u>194</u>	<u>27.5</u>	198	26.9	<u>195</u>	<u>27.3</u>
454.calculix	413	20.0	<u>414</u>	<u>19.9</u>	416	19.8	398	20.7	<u>395</u>	<u>20.9</u>	394	20.9
459.GemsFDTD	264	40.3	285	37.2	<u>264</u>	<u>40.3</u>	210	50.4	211	50.3	<u>211</u>	<u>50.4</u>
465.tonto	<u>558</u>	<u>17.6</u>	560	17.6	557	17.7	<u>423</u>	<u>23.2</u>	417	23.6	<u>422</u>	<u>23.3</u>
470.lbm	285	48.2	<u>285</u>	<u>48.2</u>	285	48.2	<u>285</u>	<u>48.2</u>	284	48.3	<u>285</u>	<u>48.2</u>
481.wrf	356	31.4	<u>357</u>	<u>31.3</u>	358	31.2	<u>322</u>	<u>34.7</u>	324	34.4	321	34.8
482.sphinx3	<u>625</u>	<u>31.2</u>	628	31.0	617	31.6	<u>703</u>	<u>27.7</u>	704	27.7	702	27.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

Turbo Mode Enable
 Turbo Boost set to Traditional
 CPU C State Enable
 Data Reuse Disable

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
 'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
 OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to granularity=fine,scatter
 KMP_STACKSIZE set to 200M



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	32.1
IBM System x3650 M3 (Intel Xeon L5630)	SPECfp_base2006 =	30.2
CPU2006 license: 11	Test date:	May-2010
Test sponsor: IBM Corporation	Hardware Availability:	Jun-2010
Tested by: IBM Corporation	Software Availability:	Jan-2010

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 32.1

IBM System x3650 M3 (Intel Xeon L5630)

SPECfp_base2006 = 30.2

CPU2006 license: 11

Test date: May-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-parallel -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 32.1

IBM System x3650 M3 (Intel Xeon L5630)

SPECfp_base2006 = 30.2

CPU2006 license: 11

Test date: May-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

453.povray: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsse4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
 -parallel

416.gamess: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -opt-prefetch -auto-ilp32

436.cactusADM: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xsse4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100601.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100601.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 32.1

IBM System x3650 M3 (Intel Xeon L5630)

SPECfp_base2006 = 30.2

CPU2006 license: 11

Test date: May-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 07:55:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 June 2010.