



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

SPECfp®2006 =

28.1

A+ Server 1022G-NTF, AMD Opteron 6128

SPECfp_base2006 =

20.4

CPU2006 license: 49


Test date: May-2010

Test sponsor: Advanced Micro Devices

Hardware Availability: Mar-2010

Tested by: Advanced Micro Devices

Software Availability: May-2010

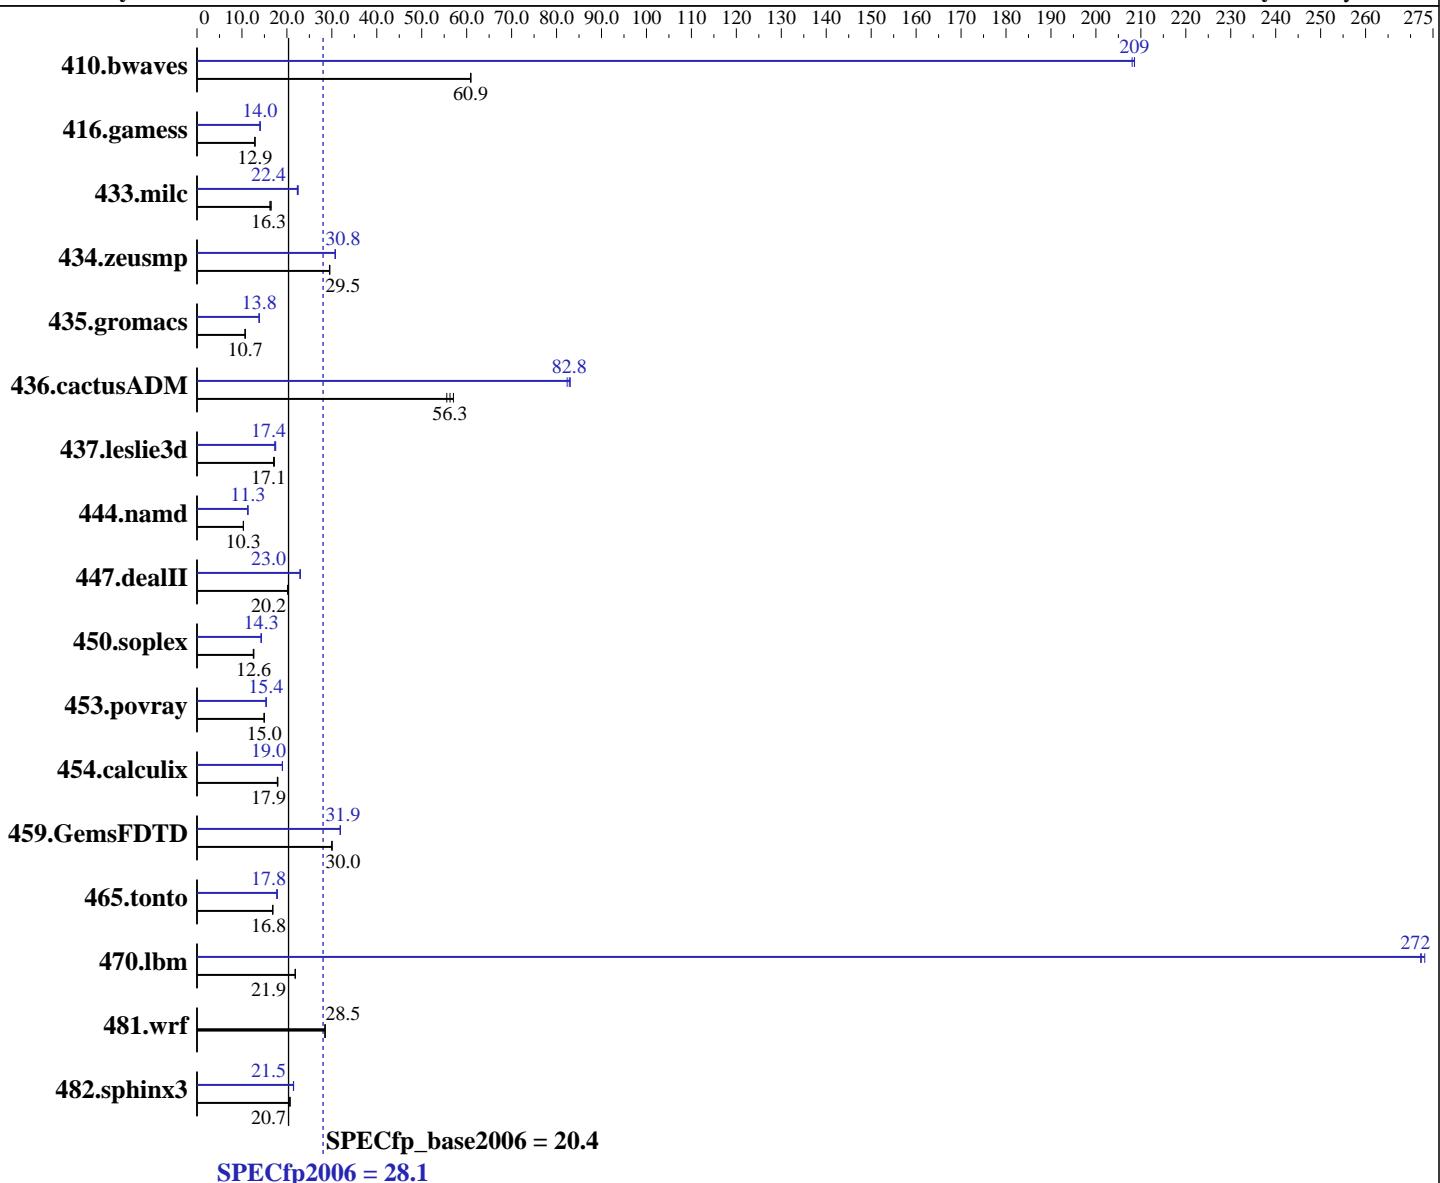

Hardware

CPU Name: AMD Opteron 6128
 CPU Characteristics:
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 5.4, Advanced Platform with patch RHSA-2009:1670, Kernel 2.6.18-164.9.1.el5
 Compiler: x86 Open64 4.2.3.2 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

A+ Server 1022G-NTF, AMD Opteron 6128

SPECfp2006 = 28.1

CPU2006 license: 49

Test date: May-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 4 cores

Other Software: binutils 2.18

Other Cache: None

Memory: 64 GB (16 x 4 GB, DDR3-1333, CL9, Reg, Dual Rank)

Disk Subsystem: 1 x 250 GB SATA, 7200 RPM

Other Hardware: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	223	60.9	223	60.9	223	60.9	65.2	209	65.1	209	65.3	208
416.gamess	1517	12.9	1518	12.9	1521	12.9	1392	14.1	1396	14.0	1397	14.0
433.milc	556	16.5	565	16.3	564	16.3	411	22.3	408	22.5	409	22.4
434.zeusmp	308	29.5	308	29.5	309	29.5	296	30.8	296	30.8	296	30.7
435.gromacs	665	10.7	666	10.7	667	10.7	516	13.8	516	13.8	516	13.8
436.cactusADM	215	55.6	212	56.3	209	57.1	144	82.8	145	82.4	144	83.0
437.leslie3d	550	17.1	546	17.2	551	17.1	542	17.4	537	17.5	543	17.3
444.namd	777	10.3	776	10.3	777	10.3	711	11.3	708	11.3	707	11.3
447.dealII	566	20.2	567	20.2	565	20.2	498	23.0	499	22.9	498	23.0
450.soplex	659	12.7	662	12.6	666	12.5	583	14.3	583	14.3	584	14.3
453.povray	355	15.0	356	15.0	357	14.9	346	15.4	346	15.4	346	15.4
454.calculix	459	18.0	460	17.9	462	17.9	434	19.0	434	19.0	434	19.0
459.GemsFDTD	354	30.0	353	30.0	353	30.0	333	31.9	333	31.9	333	31.9
465.tonto	584	16.8	584	16.8	583	16.9	550	17.9	553	17.8	554	17.8
470.lbm	628	21.9	628	21.9	629	21.8	50.3	273	50.5	272	50.4	272
481.wrf	392	28.5	392	28.5	392	28.5	392	28.5	392	28.5	392	28.5
482.sphinx3	945	20.6	942	20.7	941	20.7	907	21.5	908	21.5	909	21.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=4000 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

cpuspeed stop was used to set the CPU frequency to its maximum.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro (Test Sponsor: Advanced Micro Devices)	SPECfp2006 =	28.1
A+ Server 1022G-NTF, AMD Opteron 6128	SPECfp_base2006 =	20.4
CPU2006 license: 49	Test date:	May-2010
Test sponsor: Advanced Micro Devices	Hardware Availability:	Mar-2010
Tested by: Advanced Micro Devices	Software Availability:	May-2010

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/work/cpu2006/amd1002mc-speed-libs-revA/64:/root/work/cpu2006/amd1002mc-speed-libs-revA/32"  
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15"  
O64_OMP_SPIN_USER_LOCK = "true"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
          -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro
(Test Sponsor: Advanced Micro Devices)

SPECfp2006 = 28.1

A+ Server 1022G-NTF, AMD Opteron 6128

SPECfp_base2006 = 20.4

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: May-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

Base Optimization Flags

C benchmarks:

```
-march=barcelona -Ofast -HP:bdt=2m:heap=2m
```

C++ benchmarks:

```
-march=barcelona -Ofast -static -INLINE:aggressive=on
-HP:bdt=2m:heap=2m
```

Fortran benchmarks:

```
-march=barcelona -Ofast -apo -LNO:parallel_overhead=10000
-LNO:fusion_peeling_limit=0 -HP:bdt=2m:heap=2m
```

Benchmarks using both Fortran and C:

```
-march=barcelona -Ofast -HP:bdt=2m:heap=2m -apo
-LNO:parallel_overhead=10000 -LNO:fusion_peeling_limit=0
```

Peak Compiler Invocation

C benchmarks:

```
opencc
```

C++ benchmarks:

```
openCC
```

Fortran benchmarks:

```
openf95
```

Benchmarks using both Fortran and C:

```
opencc openf95
```

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro
(Test Sponsor: Advanced Micro Devices)

SPECfp2006 = 28.1

A+ Server 1022G-NTF, AMD Opteron 6128

SPECfp_base2006 = 20.4

CPU2006 license: 49

Test date: May-2010

Test sponsor: Advanced Micro Devices

Hardware Availability: Mar-2010

Tested by: Advanced Micro Devices

Software Availability: May-2010

Peak Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

```
433.milc: -march=barcelona -Ofast -apo -CG:movnti=1
           -CG:local_sched_alg=1 -CG:locs_shallow_depth=1
           -CG:compute_to=on -HP:bdt=2m:heap=2m -LNO:prefetch=3
```

```
470.lbm: -march=barcelona -Ofast -mso -apo -CG:sse_cse_regs=0
           -LNO:prefetch_ahead=4 -CG:locs_shallow_depth=1
           -CG:cmp_peep=on -CG:compute_to=on -OPT:unroll_times_max=8
           -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
           -OPT:alias=restricted -m3dnow -IPA:inline=off
```

```
482.sphinx3: -march=barcelona -fb_create fbdata(pass 1)
              -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
              -CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
              -CG:local_sched_alg=1 -INLINE:aggressive=on
```

C++ benchmarks:

```
444.namd: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
           -CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
           -OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m
```

```
447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
             -LNO:opt=0 -fno-emit-exceptions -m32
             -OPT:unroll_times_max=8 -OPT:unroll_size=256
             -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
             -CG:cmp_peep=on -TENV:frame_pointer=off
```

```
450.soplex: -march=barcelona -fb_create fbdata(pass 1)
              -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
              -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
              -OPT:fold_unsigned_relops=on -CG:load_exe=0 -fno-exceptions
              -m32 -HP:bdt=2m:heap=2m
```

```
453.povray: -march=barcelona -fb_create fbdata(pass 1)
              -fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
              -HP:bdt=2m:heap=2m
```

Fortran benchmarks:

```
410.bwaves: -march=barcelona -Ofast -apo -OPT:malloc_alg=2
             -CG:use_prefetchnta=on -CG:cmp_peep=on -LNO:blocking=off
             -LNO:prefetch=3 -LNO:prefetch_ahead=5
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

A+ Server 1022G-NTF, AMD Opteron 6128

SPECfp2006 =

28.1

SPECfp_base2006 =

20.4

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date:

May-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

Peak Optimization Flags (Continued)

410.bwaves (continued):

```
-LNO:ignore_feedback=off -LNO:apo_use_feedback=on
-WOPT:aggstr=0
```

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -Ofast -apo -LNO:blocking=off
-
-LNO:interchange=off -LNO:fusion_peeling_limit=0
-
-OPT:treeheight=on -OPT:unroll_size=256 -CG:cmp_peep=on
-
-CG:compute_to=on -GRA:prioritize_by_density=on
-
-HP:bdt=2m:heap=2m

437.leslie3d: -march=barcelona -Ofast -apo -OPT:unroll_size=256
-
-LNO:prefetch_ahead=4 -LNO:parallel_overhead=32768
-
-GRA:prioritize_by_density=on -m3dnow -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -Ofast -apo -LNO:fission=2
-
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1
-
-HP

465.tonto: -march=barcelona -Ofast -apo
-
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-
-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -apo -OPT:rsqrt=2
-
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)
-
-fb_opt fbdata(pass 2) -Ofast -apo
-
-LANG:heap_allocation_threshold=1000 -LNO:prefetch_ahead=1
-
-HP:bdt=2m:heap=2m

454.calculix: -march=barcelona -Ofast -LNO:prefetch_ahead=30
-
-CG:load_exe=0 -CG:ptr_load_use=0 -CG:local_sched_alg=2
-
-CG:compute_to=on -WOPT:unroll=2 -GRA:optimize_boundary=on
-
-HP:bdt=2m:heap=2m -apo

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.html>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

A+ Server 1022G-NTF, AMD Opteron 6128

SPECfp2006 = 28.1

CPU2006 license: 49

Test date: May-2010

Test sponsor: Advanced Micro Devices

Hardware Availability: Mar-2010

Tested by: Advanced Micro Devices

Software Availability: May-2010

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 08:29:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 June 2010.