



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X8DTH-6F (Intel Xeon X5677, 3.46 GHz)

**SPECfp®\_rate2006 = 221**

**SPECfp\_rate\_base2006 = 213**

CPU2006 license: 001176


Test date: May-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

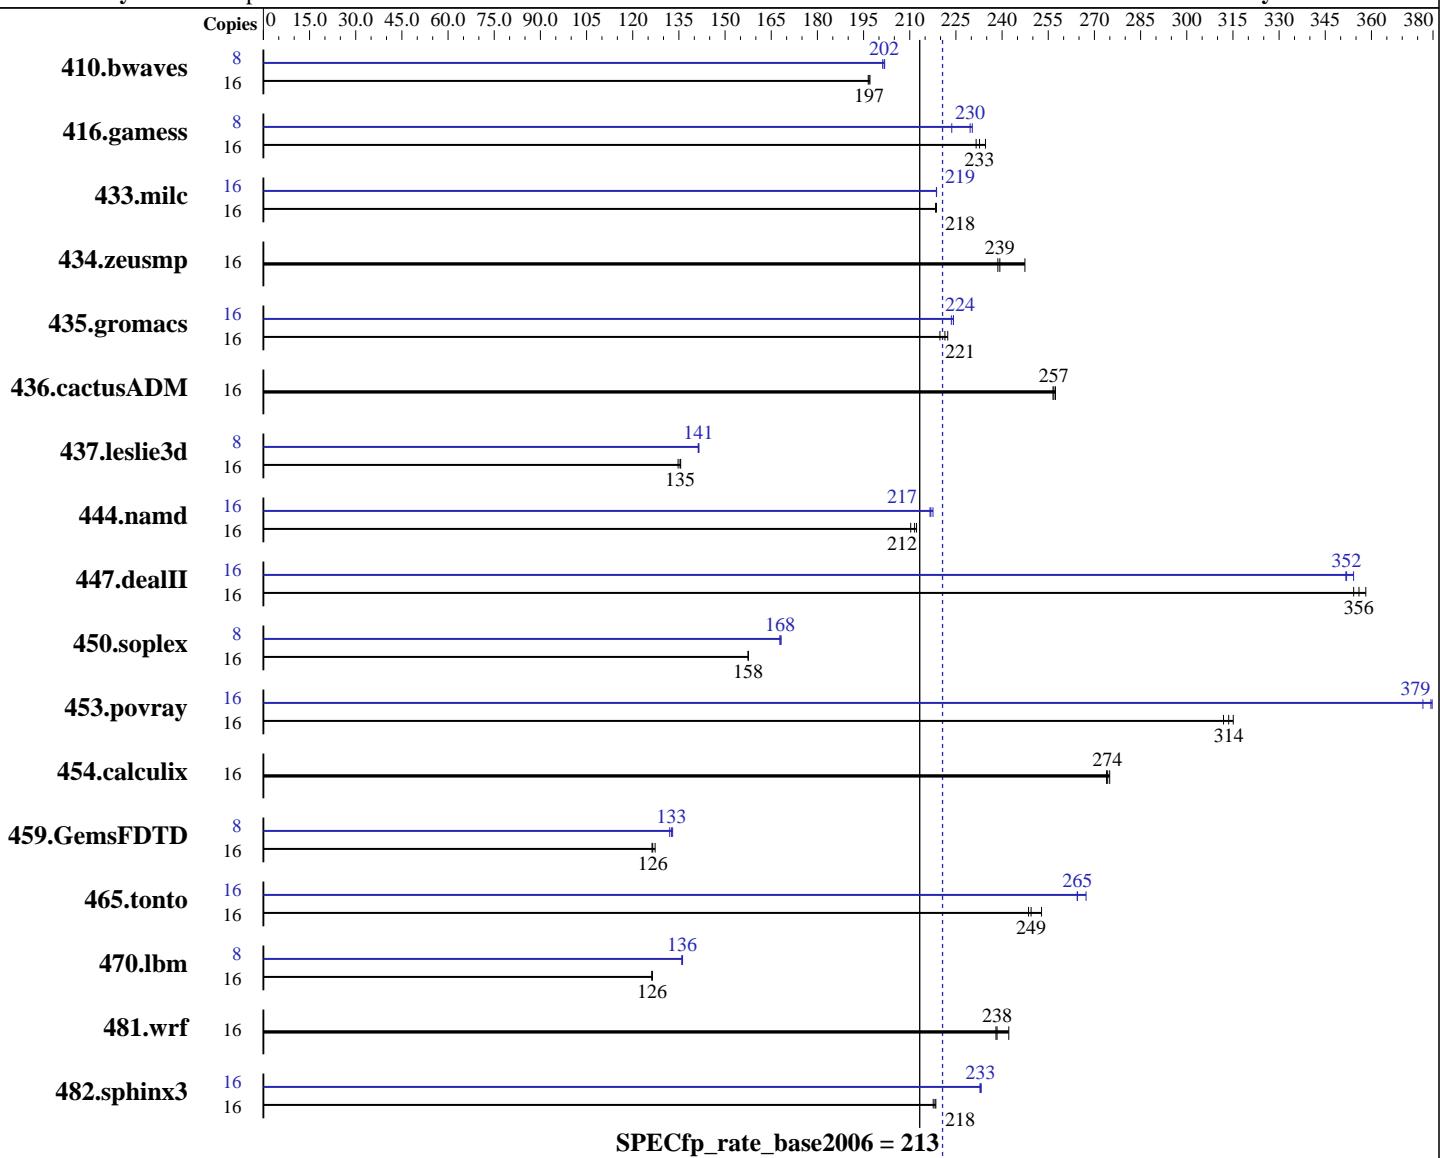

### Hardware

CPU Name: Intel Xeon X5677  
CPU Characteristics: Intel Turbo Boost Technology up to 3.73 GHz  
CPU MHz: 3467  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
Compiler: Kernel 2.6.27.19-5-default  
Auto Parallel: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1  
File System: Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
System State: No  
ext3  
Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X8DTH-6F (Intel Xeon X5677, 3.46 GHz)

**SPECfp\_rate2006 = 221**

CPU2006 license: 001176

Test date: May-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB DDR3-1333 RDIMM, ECC, CL9)  
 Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1103	197	<b>1105</b>	<b>197</b>	1107	197	8	540	201	539	202	<b>539</b>	<b>202</b>
416.gamess	16	1335	235	<b>1346</b>	<b>233</b>	1353	232	8	<b>682</b>	<b>230</b>	680	230	<b>700</b>	<b>224</b>
433.milc	16	<b>672</b>	<b>218</b>	672	218	672	219	16	<b>672</b>	<b>219</b>	672	219	<b>672</b>	<b>219</b>
434.zeusmp	16	588	247	610	239	<b>609</b>	<b>239</b>	16	588	247	610	239	<b>609</b>	<b>239</b>
435.gromacs	16	514	222	520	220	<b>516</b>	<b>221</b>	16	<b>510</b>	<b>224</b>	511	224	510	224
436.cactusADM	16	<b>744</b>	<b>257</b>	745	257	743	257	16	<b>744</b>	<b>257</b>	745	257	743	257
437.leslie3d	16	<b>1111</b>	<b>135</b>	1109	136	1116	135	8	531	142	<b>532</b>	<b>141</b>	532	141
444.namd	16	610	210	<b>607</b>	<b>212</b>	605	212	16	590	218	592	217	<b>592</b>	<b>217</b>
447.dealII	16	511	358	517	354	<b>514</b>	<b>356</b>	16	517	354	<b>520</b>	<b>352</b>	520	352
450.soplex	16	<b>847</b>	<b>158</b>	847	158	847	158	8	<b>397</b>	<b>168</b>	397	168	398	168
453.povray	16	<b>271</b>	<b>314</b>	270	315	273	312	16	224	380	<b>224</b>	<b>379</b>	226	377
454.calculix	16	482	274	<b>481</b>	<b>274</b>	480	275	16	482	274	<b>481</b>	<b>274</b>	480	275
459.GemsFDTD	16	1334	127	1344	126	<b>1342</b>	<b>126</b>	8	<b>640</b>	<b>133</b>	643	132	638	133
465.tonto	16	633	249	<b>631</b>	<b>249</b>	623	253	16	589	267	<b>595</b>	<b>265</b>	595	264
470.lbm	16	1740	126	<b>1741</b>	<b>126</b>	1742	126	8	807	136	808	136	<b>808</b>	<b>136</b>
481.wrf	16	738	242	<b>750</b>	<b>238</b>	751	238	16	738	242	<b>750</b>	<b>238</b>	751	238
482.sphinx3	16	<b>1429</b>	<b>218</b>	1433	218	1427	218	16	1337	233	<b>1338</b>	<b>233</b>	1339	233

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## Platform Notes

Fan speed set to Full Speed in BIOS Setup.  
 As tested, the system used a Supermicro CSE-743TQ-865B chassis.  
 The chassis is configured with a PWS-865-PQ power supply, 2 SNK-P0038P heatsinks,  
 as well as 4 FAN-0074L and 2 FAN-0082L4 cooling fans.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X8DTH-6F (Intel Xeon X5677, 3.46 GHz)

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

**SPECfp\_rate2006 = 221**

**SPECfp\_rate\_base2006 = 213**

Test date: May-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8DTH-6F (Intel Xeon X5677, 3.46 GHz)

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

**SPECfp\_rate2006 = 221**

**SPECfp\_rate\_base2006 = 213**

Test date: May-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8DTH-6F (Intel Xeon X5677, 3.46 GHz)

**SPECfp\_rate2006 = 221**

**SPECfp\_rate\_base2006 = 213**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** May-2010

**Hardware Availability:** Mar-2010

**Software Availability:** Jan-2010

## Peak Optimization Flags (Continued)

433.milc: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -opt-prefetch

470.lbm: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xsse4 .2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsse4 .2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xsse4 .2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0

465.tonto: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8DTH-6F (Intel Xeon X5677, 3.46 GHz)

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

SPECfp\_rate2006 = 221

SPECfp\_rate\_base2006 = 213

Test date: May-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

435.gromacs: -xSSE4\_2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100915.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100915.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 10:09:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 September 2010.