



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

**SPECint\_rate2006 = 166**

Tyan YR190B8228, AMD Opteron 4164 EE

**SPECint\_rate\_base2006 = 132**

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jun-2010

Hardware Availability: Aug-2010

Software Availability: Feb-2010

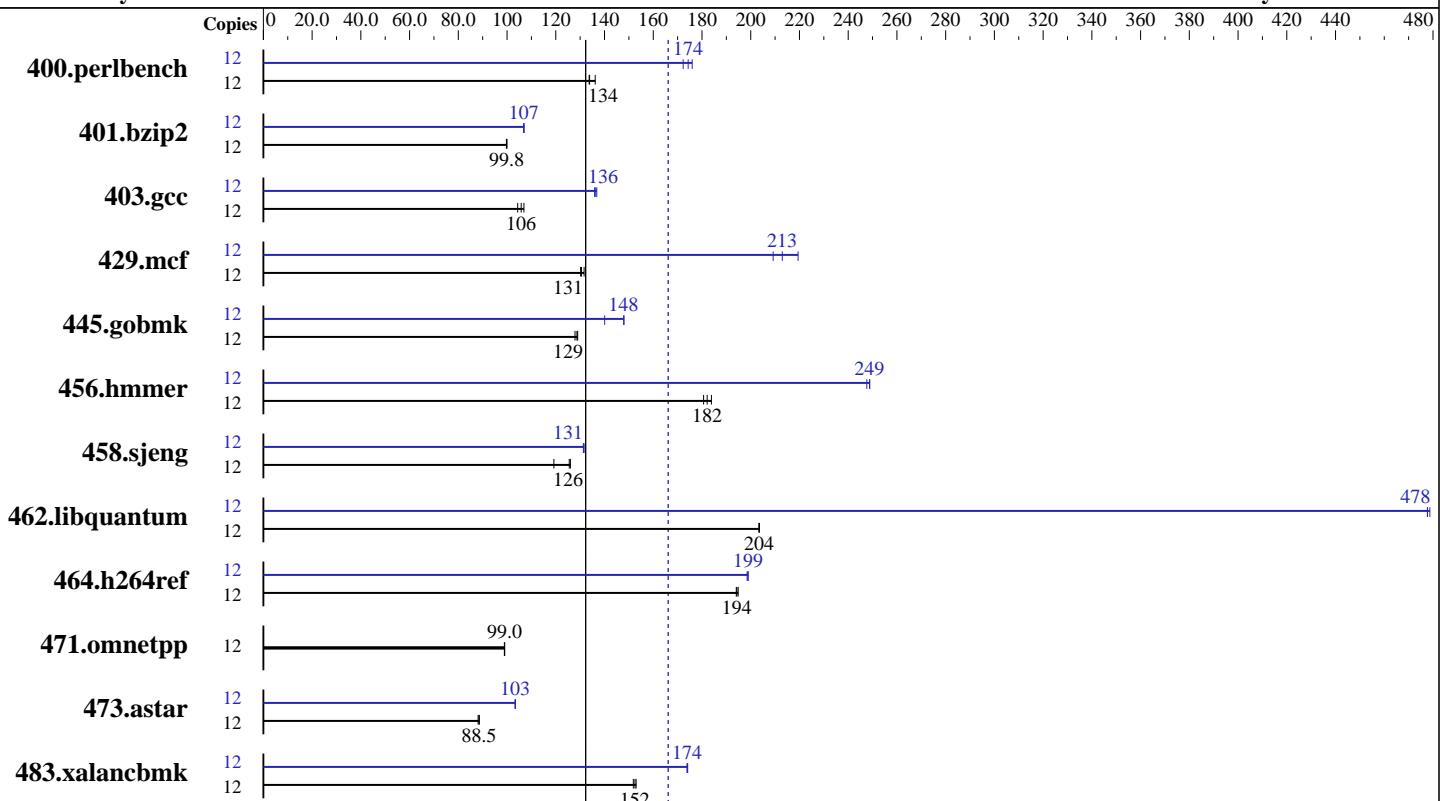

**SPECint\_rate\_base2006 = 132**

**SPECint\_rate2006 = 166**

## Hardware

CPU Name:	AMD Opteron 4164 EE
CPU Characteristics:	
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (4 x 8 GB, DDR3-1333, CL9, Reg, Dual Rank)
Disk Subsystem:	1 x 128 GB SATA SSD, Western Digital SiliconEdge Blue SSC-D0128SC-2100
Other Hardware:	None

## Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler:	x86 Open64 4.2.3 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

**SPECint\_rate2006 = 166**

Tyan YR190B8228, AMD Opteron 4164 EE

**SPECint\_rate\_base2006 = 132**

CPU2006 license: 49

Test date: Jun-2010

Test sponsor: Advanced Micro Devices

Hardware Availability: Aug-2010

Tested by: Advanced Micro Devices

Software Availability: Feb-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	861	136	<b>876</b>	<b>134</b>	877	134	12	681	172	666	176	<b>673</b>	<b>174</b>
401.bzip2	12	<b>1160</b>	<b>99.8</b>	1161	99.7	1159	100	12	<b>1084</b>	<b>107</b>	1082	107	1084	107
403.gcc	12	926	104	<b>913</b>	<b>106</b>	903	107	12	711	136	<b>708</b>	<b>136</b>	706	137
429.mcf	12	841	130	831	132	<b>838</b>	<b>131</b>	12	523	209	<b>514</b>	<b>213</b>	499	219
445.gobmk	12	<b>978</b>	<b>129</b>	976	129	984	128	12	<b>851</b>	<b>148</b>	899	140	850	148
456.hmmer	12	609	184	620	181	<b>615</b>	<b>182</b>	12	452	248	450	249	<b>450</b>	<b>249</b>
458.sjeng	12	1218	119	1152	126	<b>1157</b>	<b>126</b>	12	1103	132	1106	131	<b>1105</b>	<b>131</b>
462.libquantum	12	<b>1222</b>	<b>204</b>	1221	204	1223	203	12	520	478	519	479	<b>520</b>	<b>478</b>
464.h264ref	12	1368	194	1363	195	<b>1367</b>	<b>194</b>	12	1338	199	1335	199	<b>1335</b>	<b>199</b>
471.omnetpp	12	757	99.0	<b>758</b>	<b>99.0</b>	758	98.9	12	757	99.0	<b>758</b>	<b>99.0</b>	758	98.9
473.astar	12	956	88.1	<b>952</b>	<b>88.5</b>	951	88.6	12	815	103	<b>815</b>	<b>103</b>	815	103
483.xalancbmk	12	<b>543</b>	<b>152</b>	545	152	541	153	12	476	174	476	174	<b>476</b>	<b>174</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=5400 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/root/work/cpu2006-power/amd1002li-rate-libs-revA/64:/root/work/cpu2006-power/amd1002li-rate-libs-revA/32"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>  
Binaries were compiled on SLES10 SP2 with binutils 2.18



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

**SPECint\_rate2006 = 166**

Tyan YR190B8228, AMD Opteron 4164 EE

**SPECint\_rate\_base2006 = 132**

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

**Test date:** Jun-2010

**Hardware Availability:** Aug-2010

**Software Availability:** Feb-2010

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64  
401.bzip2: -DSPEC_CPU_LP64  
403.gcc: -DSPEC_CPU_LP64  
429.mcf: -DSPEC_CPU_LP64  
445.gobmk: -DSPEC_CPU_LP64  
456.hmmr: -DSPEC_CPU_LP64  
458.sjeng: -DSPEC_CPU_LP64  
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX  
464.h264ref: -DSPEC_CPU_LP64  
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:  
-march=barcelona -mso -Ofast -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:  
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on  
-CG:cmp\_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64  
401.bzip2: -DSPEC_CPU_LP64  
445.gobmk: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190B8228, AMD Opteron 4164 EE

**SPECint\_rate2006 = 166**

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

**Test date:** Jun-2010

**Hardware Availability:** Aug-2010

**Software Availability:** Feb-2010

## Peak Portability Flags (Continued)

```
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -march=barcelona -mso -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
            -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
          -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
          -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on
          -CG:gcm=off -GRA:prioritize_by_density=on -m32
          -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
            -OPT:unroll_times_max=8 -OPT:unroll_size=256
            -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
            -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
            -LNO:ignore_feedback=off -CG:p2align=on
            -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmr: -march=barcelona -mso -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
           -OPT:alias=disjoint -OPT:unroll_times_max=8
           -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
           -CG:local_sched_alg=1 -CG:cflow=0
           -CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
           -HP:bdt=2m:heap=2m

458.sjeng: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
            -LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

**SPECint\_rate2006 = 166**

Tyan YR190B8228, AMD Opteron 4164 EE

**SPECint\_rate\_base2006 = 132**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Jun-2010

**Hardware Availability:** Aug-2010

**Software Availability:** Feb-2010

## Peak Optimization Flags (Continued)

458.sjeng (continued):

```
-IPA:pu_reorder=2 -CG:ptr_load_use=0  
-OPT:unroll_times_max=8 -INLINE:aggressive=on
```

```
462.libquantum: -march=barcelona -mso -Ofast -LNO:pf2=0 -CG:gcm=off  
-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0  
-HP:bdt=2m:heap=2m -OPT:alias=disjoint  
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000
```

```
464.h264ref: -march=barcelona -mso -fb_create fbdata(pass 1)  
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000  
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0  
-CG:push_pop_int_saved_regs=off
```

C++ benchmarks:

```
471.omnetpp: basepeak = yes
```

```
473.astar: -march=barcelona -mso -fb_create fbdata(pass 1)  
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off  
-WOPT:if_conv=0 -GRA:optimize_boundary=on  
-OPT:alias=disjoint -INLINE:aggressive=on  
-IPA:small_pu=3000 -IPA:plimit=3000 -m32  
-HP:bdt=2m:heap=2m
```

```
483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32  
-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off  
-fno-emit-exceptions  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.3-flags-revA.html>  
<http://www.spec.org/cpu2006/flags/amd-platform-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.3-flags-revA.xml>  
<http://www.spec.org/cpu2006/flags/amd-platform-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 13:23:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 July 2010.