



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Oracle Corporation

Sun Fire X4170 M2 (Intel Xeon X5670 2.93GHz)

**SPECfp®2006 = 57.6**


CPU2006 license: 6

**Test date:** May-2010

**Hardware Availability:** Jun-2010

**Software Availability:** Jun-2010

Test sponsor: Oracle Corporation

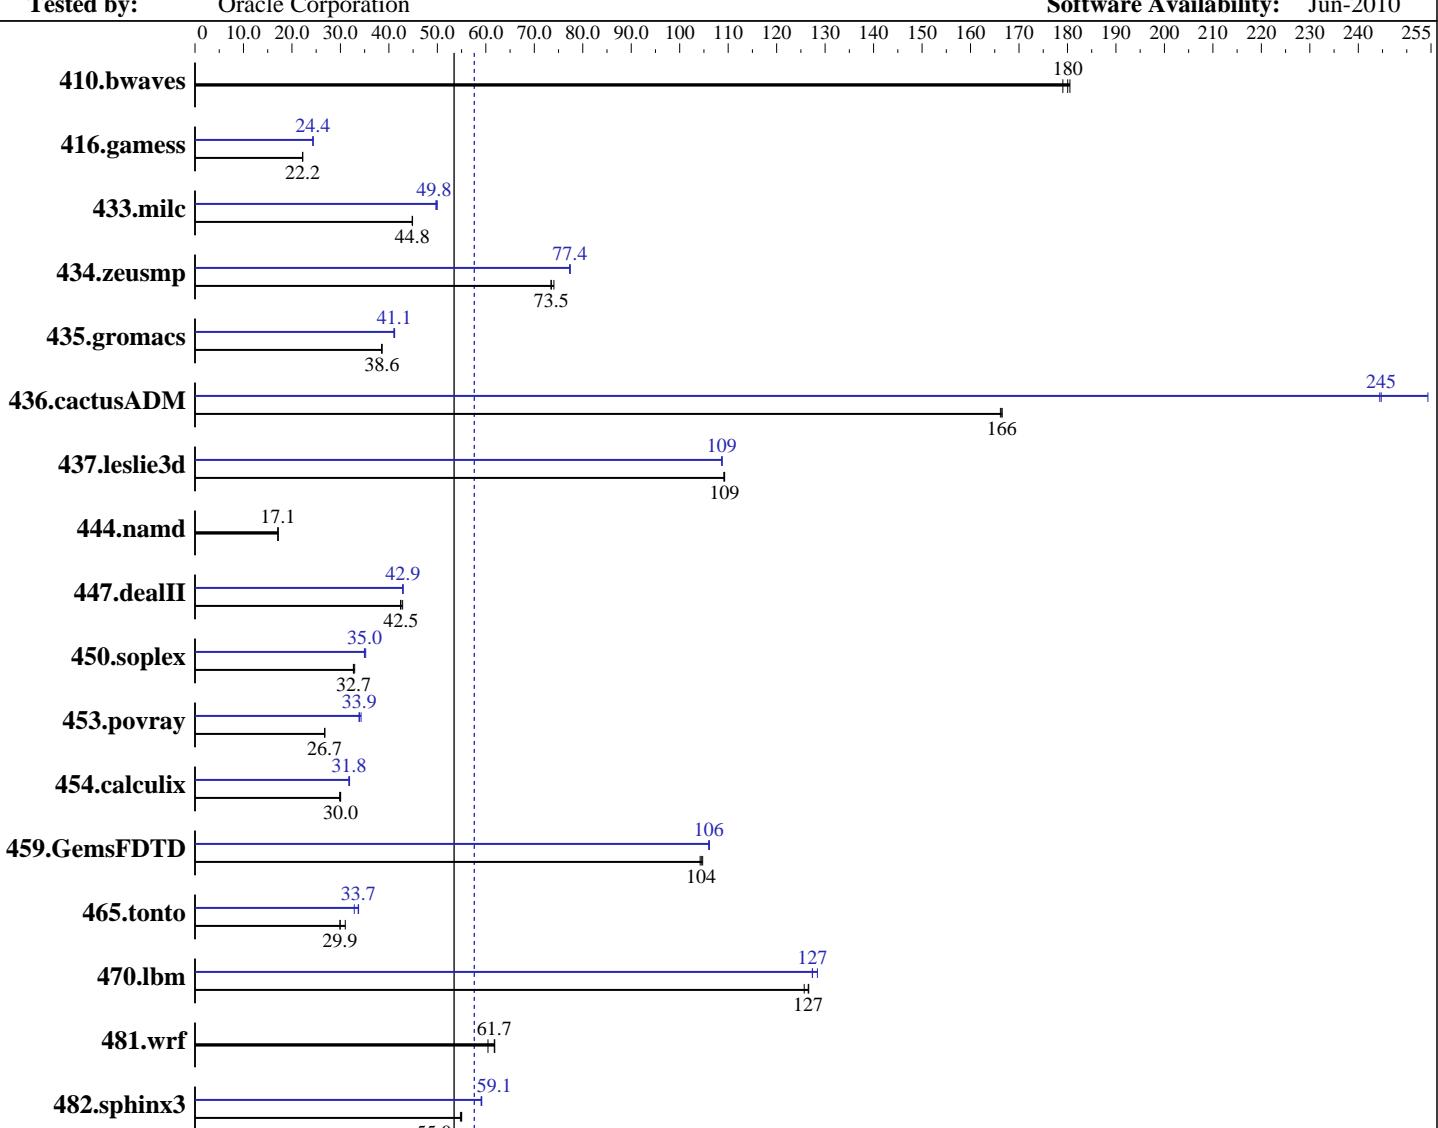

**SPECfp\_base2006 = 53.5**

**SPECfp2006 = 57.6**

### Hardware

CPU Name: Intel Xeon X5670  
CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
CPU MHz: 2933  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1 or 2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Oracle Solaris 10 10/09  
Compiler: Oracle Solaris Studio Express 6/10  
Auto Parallel: Yes  
File System: zfs  
System State: Default  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: Apache C++ Standard Library V4.2.1

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Oracle Corporation

Sun Fire X4170 M2 (Intel Xeon X5670 2.93GHz)

**SPECfp2006 = 57.6**

**SPECfp\_base2006 = 53.5**

CPU2006 license: 6

Test date: May-2010

Test sponsor: Oracle Corporation

Hardware Availability: Jun-2010

Tested by: Oracle Corporation

Software Availability: Jun-2010

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB DDR3-1333 CL9, 2 Rank, ECC)  
 Disk Subsystem: 1 x 300 GB, SAS, 10000 RPM  
 Other Hardware: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	75.9	179	<b>75.5</b>	<b>180</b>	75.3	181	<b>75.9</b>	179	<b>75.5</b>	<b>180</b>	75.3	181
416.gamess	882	22.2	<b>882</b>	<b>22.2</b>	882	22.2	<b>804</b>	24.3	<b>804</b>	<b>24.4</b>	804	24.4
433.milc	205	44.9	<b>205</b>	<b>44.8</b>	205	44.8	<b>185</b>	49.7	<b>184</b>	<b>49.8</b>	184	50.0
434.zeusmp	<b>124</b>	<b>73.5</b>	124	73.4	123	74.0	<b>118</b>	<b>77.4</b>	118	77.4	118	77.3
435.gromacs	185	38.6	185	38.5	<b>185</b>	<b>38.6</b>	<b>174</b>	<b>41.1</b>	173	41.2	174	41.0
436.cactusADM	71.9	166	<b>71.8</b>	<b>166</b>	71.8	166	<b>48.9</b>	244	47.0	254	<b>48.8</b>	<b>245</b>
437.leslie3d	<b>86.1</b>	<b>109</b>	86.1	109	86.0	109	<b>86.5</b>	<b>109</b>	86.4	109	86.5	109
444.namd	468	17.1	<b>468</b>	<b>17.1</b>	468	17.1	<b>468</b>	17.1	<b>468</b>	<b>17.1</b>	468	17.1
447.dealII	<b>269</b>	<b>42.5</b>	270	42.4	267	42.8	<b>267</b>	42.9	267	42.9	<b>267</b>	<b>42.9</b>
450.soplex	253	32.9	<b>255</b>	<b>32.7</b>	255	32.7	<b>237</b>	35.2	<b>238</b>	<b>35.0</b>	239	34.9
453.povray	199	26.7	<b>199</b>	<b>26.7</b>	199	26.8	<b>157</b>	33.9	<b>157</b>	<b>33.9</b>	155	34.3
454.calculix	275	30.0	<b>275</b>	<b>30.0</b>	276	29.8	<b>259</b>	31.9	260	31.8	<b>259</b>	<b>31.8</b>
459.GemsFDTD	101	105	<b>102</b>	<b>104</b>	102	104	<b>100</b>	106	<b>100</b>	<b>106</b>	100	106
465.tonto	317	31.0	329	29.9	<b>329</b>	<b>29.9</b>	<b>292</b>	<b>33.7</b>	292	33.7	299	32.9
470.lbm	109	126	109	127	<b>109</b>	<b>127</b>	107	128	<b>108</b>	<b>127</b>	108	127
481.wrf	181	61.8	185	60.4	<b>181</b>	<b>61.7</b>	181	61.8	185	60.4	<b>181</b>	<b>61.7</b>
482.sphinx3	<b>355</b>	<b>55.0</b>	354	55.0	356	54.8	<b>330</b>	<b>59.1</b>	330	59.1	329	59.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

The Apache C++ Standard Library V4.2.1 was installed from <http://stdcxx.apache.org/download.html> using:

```
alias gmake=specmake
gmake BUILDTYPE=8D CONFIG=sunpro.config
```

## Operating System Notes

```
ulimit -s unlimited (shell)
```

```
/etc/system parameters
tune_t_fsflushr=10
autoup=900
zfs:zfs_arc_max = 0x10000000
lpg_alloc_prefer=1
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Oracle Corporation

Sun Fire X4170 M2 (Intel Xeon X5670 2.93GHz)

**SPECfp2006 = 57.6**

CPU2006 license: 6  
Test sponsor: Oracle Corporation  
Tested by: Oracle Corporation

Test date: May-2010  
Hardware Availability: Jun-2010  
Software Availability: Jun-2010

## Platform Notes

Default BIOS settings used except:  
C-State : Disabled  
Data Reuse Optimization : Disabled

## General Notes

Environment variables set by runspec before the start of the run:  
OMP\_NUM\_THREADS = "12"  
SUNW\_MP\_PROCBIND = "23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0"  
SUNW\_MP\_THR\_IDLE = "SPIN"  
  
447.dealII (peak): "apache\_stdcxx\_4\_2\_1" src.alt was used.  
447.dealII (base): "apache\_stdcxx\_4\_2\_1" src.alt was used.

## Base Compiler Invocation

C benchmarks:  
cc

C++ benchmarks:  
CC

Fortran benchmarks:  
f90

Benchmarks using both Fortran and C:  
cc f90

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Oracle Corporation

Sun Fire X4170 M2 (Intel Xeon X5670 2.93GHz)

**SPECfp2006 = 57.6**

CPU2006 license: 6  
Test sponsor: Oracle Corporation  
Tested by: Oracle Corporation

Test date: May-2010  
Hardware Availability: Jun-2010  
Software Availability: Jun-2010

## Base Portability Flags (Continued)

459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_WORDS\_LITTLEENDIAN  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-fast -xipo=2 -m64 -xautopar -xreduction

C++ benchmarks:  
-fast -xipo=2 -m64 -xalias\_level=compatible -library=no%Cstd  
-I/datal/stdcxx-4.2.1/include -I/datal/stdcxx-4.2.1/build/include  
-L/datal/stdcxx-4.2.1/build/lib -R/datal/stdcxx-4.2.1/build/lib -lstd8D

Fortran benchmarks:  
-fast -xipo=2 -m64 -xautopar -xreduction

Benchmarks using both Fortran and C:  
-fast(cc) -xipo=2 -m64 -xautopar -xreduction -fast(f90)

## Base Other Flags

C benchmarks:  
-V -# -xjobs=24

C++ benchmarks:  
-verbose=diags,version -xjobs=24

Fortran benchmarks:  
-V -v -xjobs=24

Benchmarks using both Fortran and C:  
-V -# -xjobs=24 -v

## Peak Compiler Invocation

C benchmarks:  
cc

C++ benchmarks:  
CC

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Oracle Corporation

Sun Fire X4170 M2 (Intel Xeon X5670 2.93GHz)

**SPECfp2006 = 57.6**

**SPECfp\_base2006 = 53.5**

**CPU2006 license:** 6

**Test sponsor:** Oracle Corporation

**Tested by:** Oracle Corporation

**Test date:** May-2010

**Hardware Availability:** Jun-2010

**Software Availability:** Jun-2010

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_WORDS_LITTLEENDIAN
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -fast -xipo=2 -m64 -xpagesize=2M -xalias_level=std
470.lbm: -xprofile=collect:./feedback(pass 1)
          -xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
          -xpagesize=2M -xautopar -xreduction
          -L/datal1/SmartHeap_9/lib -R/datal1/SmartHeap_9/lib -lsmartheap_mt64
482.sphinx3: -fast -xipo=2 -m64 -xpagesize=2M -xalias_level=std
             -xrestrict -xprefetch=no%auto -xautopar -xreduction
```

C++ benchmarks:

```
444.namd: basepeak = yes
447.dealII: -fast -xipo=2 -m64 -xpagesize=2M -xalias_level=compatible
             -library=no%Cstd -I/datal1/stdcxx-4.2.1/include
             -I/datal1/stdcxx-4.2.1/build/include
             -L/datal1/stdcxx-4.2.1/build/lib
             -R/datal1/stdcxx-4.2.1/build/lib -lstd8D
450.soplex: -xprofile=collect:./feedback(pass 1)
             -xprofile=use:./feedback(pass 2) -fast -xipo=2
             -xpagesize=2M -xalias_level=compatible -library=stlport4
             -m64
453.povray: -xprofile=collect:./feedback(pass 1)
             -xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
             -xpagesize=2M -xvector=no%simd -xalias_level=compatible
             -library=stlport4 -qoption iropt -Atile:skewp
             -qoption iropt -Ainline:cs=700
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Oracle Corporation

Sun Fire X4170 M2 (Intel Xeon X5670 2.93GHz)

**SPECfp2006 = 57.6**

**SPECfp\_base2006 = 53.5**

**CPU2006 license:** 6

**Test sponsor:** Oracle Corporation

**Tested by:** Oracle Corporation

**Test date:** May-2010

**Hardware Availability:** Jun-2010

**Software Availability:** Jun-2010

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -fast -xipo=2 -m64 -xpagesize=2M -xunroll=1  
-xvector=no%simd

434.zeusmp: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64  
-xautopar -xreduction

437.leslie3d: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64  
-Qoption ube -xprefetch\_mult=2 -xautopar -xreduction

459.GemsFDTD: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64  
-xpagesize=2M -xautopar -xreduction

465.tonto: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64  
-xpagesize=2M -xautopar -xreduction -xprefetch=no%auto  
-stackvar -xalias -lumem

Benchmarks using both Fortran and C:

435.gromacs: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)  
-xvector=no%simd -xipo=2 -m64 -xpagesize=2M  
-Qoption ube -fsimple=3 -xautopar -xreduction

436.cactusADM: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -m64 -fast(cc) -fast(f90)  
-xipo=0 -xpagesize=2M -xprefetch\_level=2  
-W2,-Aparallel:nthreads=24  
-Qoption iropt -Aparallel:nthreads=24 -xautopar -xreduction  
-lumem -lmvec

454.calculix: -fast(cc) -fast(f90) -xipo=2 -m64 -xpagesize=2M  
-xunroll=3 -xprefetch\_level=2  
-xprefetch\_auto\_type=indirect\_array\_access

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Oracle Corporation

Sun Fire X4170 M2 (Intel Xeon X5670 2.93GHz)

**SPECfp2006 = 57.6**

**SPECfp\_base2006 = 53.5**

**CPU2006 license:** 6

**Test sponsor:** Oracle Corporation

**Tested by:** Oracle Corporation

**Test date:** May-2010

**Hardware Availability:** Jun-2010

**Software Availability:** Jun-2010

## Peak Other Flags

C benchmarks:

-V -# -xjobs=24

C++ benchmarks:

-verbose=diags,version -xjobs=24

Fortran benchmarks:

-V -v -xjobs=24

Benchmarks using both Fortran and C:

-V -# -xjobs=24 -v

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio-x86\\_64.html](http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio-x86_64.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio-x86\\_64.xml](http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio-x86_64.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 13:24:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 July 2010.