



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp®2006 = 32.5**

**IBM BladeCenter HX5 (Intel Xeon E7540)**

**SPECfp\_base2006 = 30.4**

**CPU2006 license:** 11


**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jun-2010

**Hardware Availability:** Jun-2010

**Software Availability:** Jan-2010

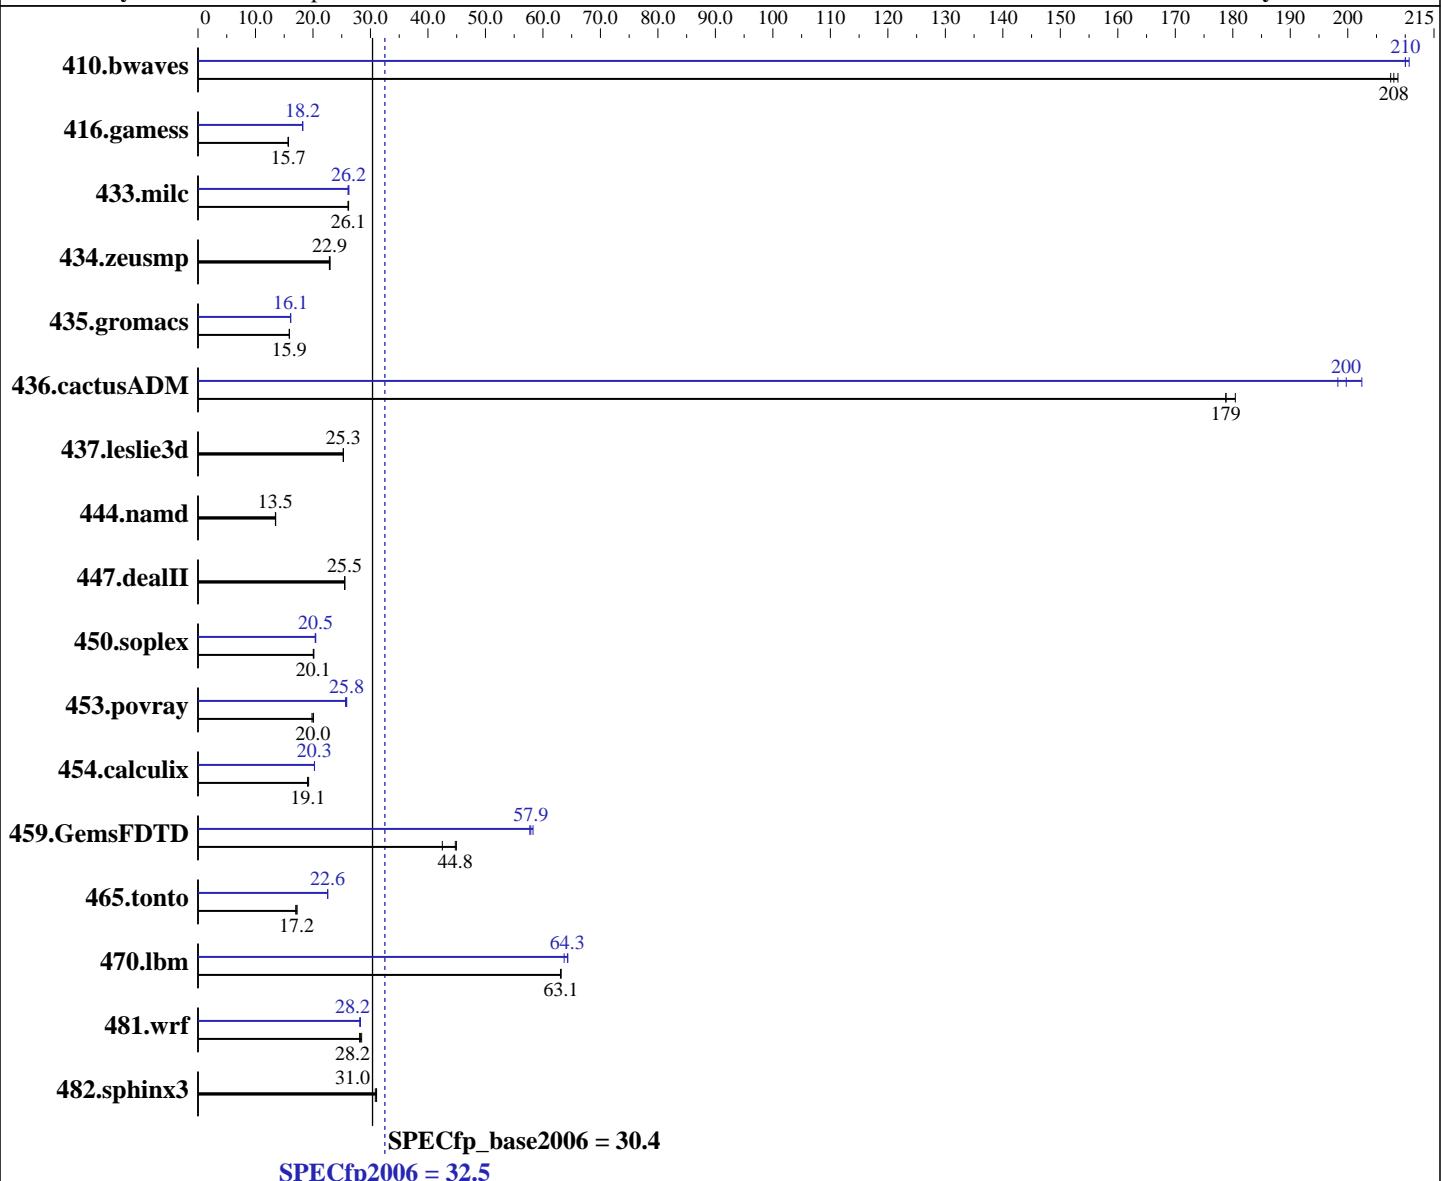

## Hardware

CPU Name: Intel Xeon E7540  
CPU Characteristics: Intel Turbo Boost Technology up to 2.26 GHz  
CPU MHz: 2000  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SuSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
Auto Parallel: Yes  
File System: ext3  
System State: Run level 3 (multi-user)

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	<b>SPECfp2006 =</b>	<b>32.5</b>
IBM BladeCenter HX5 (Intel Xeon E7540)	<b>SPECfp_base2006 =</b>	<b>30.4</b>
<b>CPU2006 license:</b> 11	<b>Test date:</b>	Jun-2010
<b>Test sponsor:</b> IBM Corporation	<b>Hardware Availability:</b>	Jun-2010
<b>Tested by:</b> IBM Corporation	<b>Software Availability:</b>	Jan-2010
L3 Cache: 18 MB I+D on chip per chip Other Cache: None Memory: 256 GB (32 x 8 GB PC3-8500R CL7, Quad Rank, running at 800 MHz) Disk Subsystem: 2 x 50 GB SATA, SSD, RAID 0 Other Hardware: None	Base Pointers: 64-bit Peak Pointers: 32/64-bit Other Software: None	

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	65.5	207	65.1	209	<b>65.3</b>	<b>208</b>	64.5	211	<b>64.7</b>	<b>210</b>	64.7	210
416.gamess	<b>1245</b>	<b>15.7</b>	1250	15.7	1244	15.7	<b>1075</b>	18.2	1076	18.2	<b>1076</b>	<b>18.2</b>
433.milc	<b>351</b>	<b>26.1</b>	350	26.2	352	26.1	<b>352</b>	26.1	<b>350</b>	<b>26.2</b>	350	26.2
434.zeusmp	398	22.9	<b>398</b>	<b>22.9</b>	396	23.0	<b>398</b>	22.9	<b>398</b>	<b>22.9</b>	396	23.0
435.gromacs	449	15.9	<b>449</b>	<b>15.9</b>	450	15.9	<b>443</b>	16.1	<b>443</b>	<b>16.1</b>	444	16.1
436.cactusADM	66.2	180	<b>66.8</b>	<b>179</b>	66.8	179	60.3	198	<b>59.8</b>	<b>200</b>	59.0	202
437.leslie3d	371	25.3	372	25.3	<b>372</b>	<b>25.3</b>	371	25.3	372	25.3	<b>372</b>	<b>25.3</b>
444.namd	596	13.5	<b>595</b>	<b>13.5</b>	593	13.5	596	13.5	<b>595</b>	<b>13.5</b>	593	13.5
447.dealII	449	25.5	<b>448</b>	<b>25.5</b>	448	25.5	449	25.5	<b>448</b>	<b>25.5</b>	448	25.5
450.soplex	414	20.2	<b>415</b>	<b>20.1</b>	416	20.1	<b>408</b>	<b>20.5</b>	407	20.5	409	20.4
453.povray	<b>266</b>	<b>20.0</b>	268	19.8	265	20.1	206	25.9	<b>206</b>	<b>25.8</b>	207	25.7
454.calculix	433	19.1	<b>432</b>	<b>19.1</b>	429	19.2	407	20.3	<b>407</b>	<b>20.3</b>	407	20.3
459.GemsFDTD	<b>237</b>	<b>44.8</b>	236	44.9	250	42.5	184	57.7	182	58.3	<b>183</b>	<b>57.9</b>
465.tonto	571	17.2	579	17.0	<b>572</b>	<b>17.2</b>	436	22.5	<b>436</b>	<b>22.6</b>	436	22.6
470.lbm	218	63.1	<b>218</b>	<b>63.1</b>	218	63.1	214	64.3	216	63.7	<b>214</b>	<b>64.3</b>
481.wrf	<b>395</b>	<b>28.2</b>	397	28.1	392	28.5	<b>396</b>	<b>28.2</b>	395	28.3	397	28.2
482.sphinx3	627	31.1	632	30.8	<b>629</b>	<b>31.0</b>	627	31.1	632	30.8	<b>629</b>	<b>31.0</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

Turbo Boost set to Traditional

## General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run  
 Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502  
 OMP\_NUM\_THREADS set to number of cores  
 KMP\_AFFINITY set to granularity=fine,scatter  
 KMP\_STACKSIZE set to 200M



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 32.5**

IBM BladeCenter HX5 (Intel Xeon E7540)

**SPECfp\_base2006 = 30.4**

CPU2006 license: 11

Test date: Jun-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 32.5**

IBM BladeCenter HX5 (Intel Xeon E7540)

**SPECfp\_base2006 = 30.4**

CPU2006 license: 11

**Test date:** Jun-2010

Test sponsor: IBM Corporation

**Hardware Availability:** Jun-2010

Tested by: IBM Corporation

**Software Availability:** Jan-2010

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-parallel -ansi-alias -auto-ilp32

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll14 -ansi-alias

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 32.5**

IBM BladeCenter HX5 (Intel Xeon E7540)

**SPECfp\_base2006 = 30.4**

CPU2006 license: 11

Test date: Jun-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

410.bwaves: -xsSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -Ob0 -opt-prefetch -parallel

465.tonto: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xsSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100603.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100603.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 32.5**

IBM BladeCenter HX5 (Intel Xeon E7540)

**SPECfp\_base2006 = 30.4**

**CPU2006 license:** 11

**Test date:** Jun-2010

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jun-2010

**Tested by:** IBM Corporation

**Software Availability:** Jan-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 12:36:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 July 2010.