SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480 F2 (Intel Xeon L7545, 1.87 GHz)

SPECfp®_rate2006 = 203

SPECfp_rate_base2006 = 196

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Apr-2010
Hardware Availability: Mar-2010
Software Availability: Dec-2009

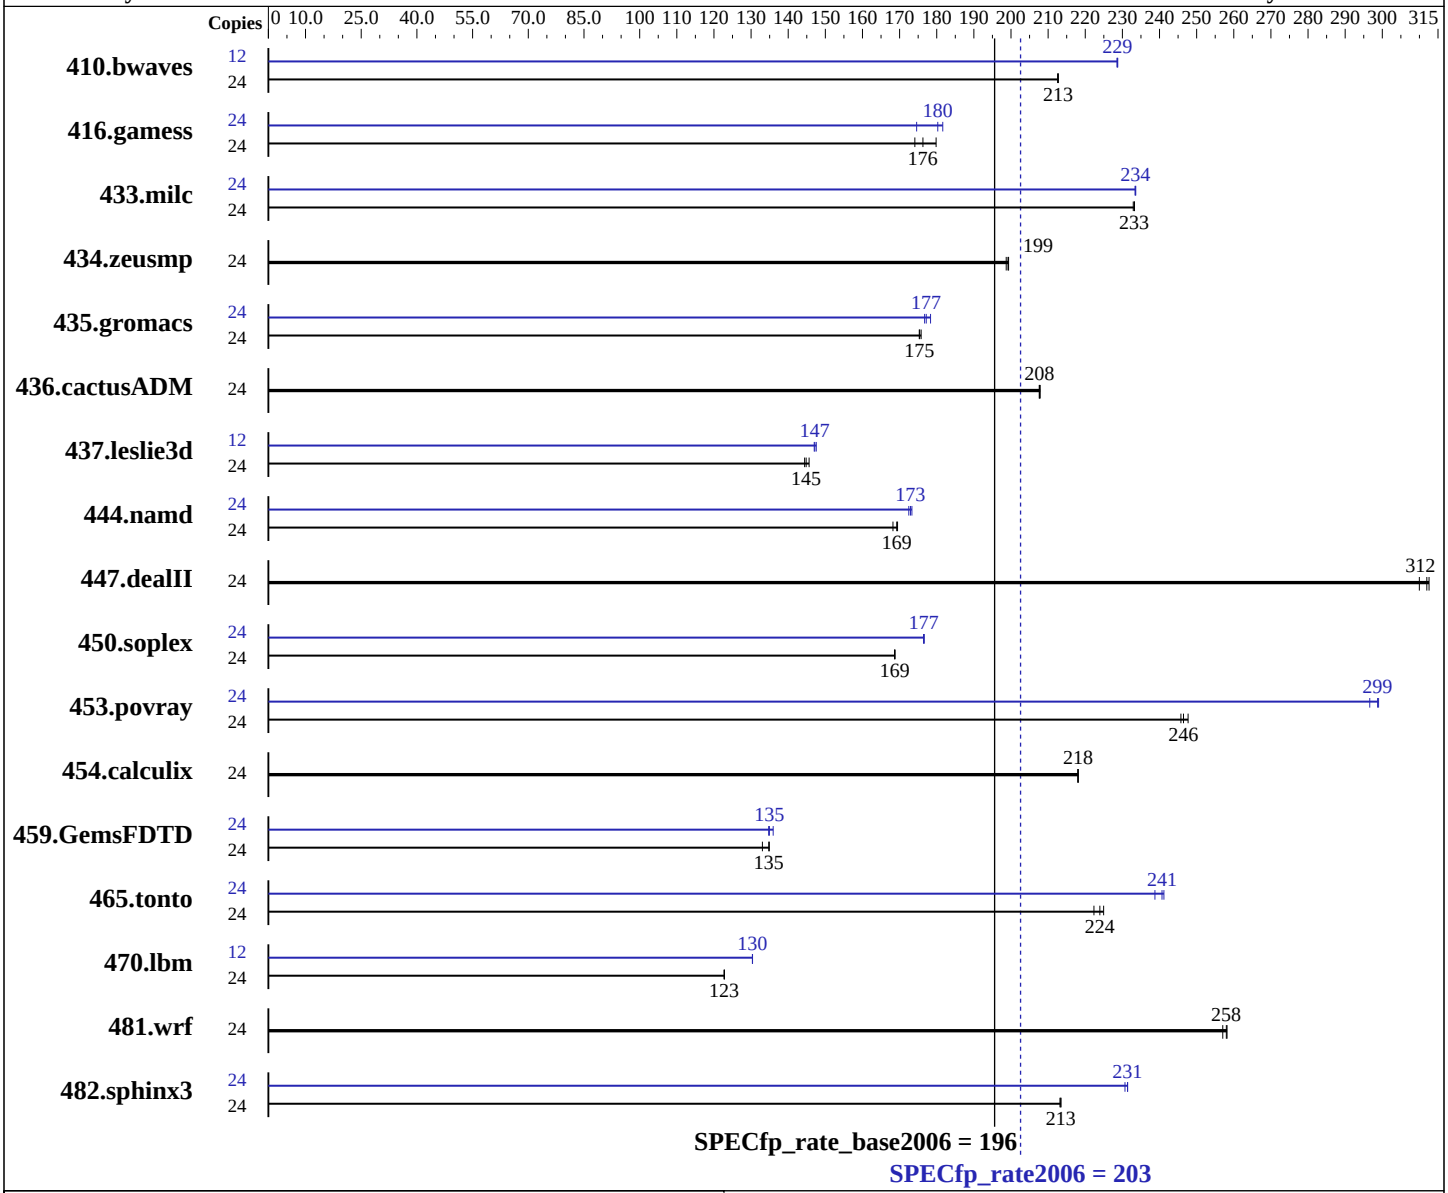

Hardware

CPU Name:	Intel Xeon L7545
CPU Characteristics:	Intel Turbo Boost Technology up to 2.53 GHz
CPU MHz:	1867
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Linux Enterprise Linux 5 (x86_64) Update 4 errata kernel (RHEL 5.4.z) kernel-2.6.18-164.9.1.el5.x86_64
Compiler:	Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480 F2 (Intel Xeon L7545, 1.87 GHz)

SPECfp_rate2006 = 203

SPECfp_rate_base2006 = 196

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Apr-2010
Hardware Availability: Mar-2010
Software Availability: Dec-2009

L3 Cache: 18 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (32 x 4 GB DDR3-1066 QR RDIMM, CL7, ECC, downclocked to 978 MHz)
Disk Subsystem: 1 x 300 GB 10000 RPM SAS 6Gb
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1533	213	**1534**	**213**	1534	213	12	713	229	714	229	**713**	**229**
416.gamess	24	2613	180	2699	174	**2666**	**176**	24	2587	182	2692	175	**2607**	**180**
433.milc	24	945	233	946	233	**945**	**233**	24	**943**	**234**	944	233	943	234
434.zeusmp	24	**1096**	**199**	1096	199	1099	199	24	**1096**	**199**	1096	199	1099	199
435.gromacs	24	978	175	**977**	**175**	975	176	24	970	177	**967**	**177**	961	178
436.cactusADM	24	**1381**	**208**	1381	208	1380	208	24	**1381**	**208**	1381	208	1380	208
437.leslie3d	24	**1558**	**145**	1549	146	1562	144	12	**766**	**147**	764	148	767	147
444.namd	24	1136	169	1144	168	**1137**	**169**	24	1111	173	**1113**	**173**	1116	172
447.dealII	24	**880**	**312**	886	310	878	313	24	**880**	**312**	886	310	878	313
450.soplex	24	1186	169	1187	169	**1187**	**169**	24	1133	177	**1134**	**177**	1134	176
453.povray	24	**518**	**246**	515	248	520	246	24	430	297	**427**	**299**	427	299
454.calculix	24	**908**	**218**	908	218	908	218	24	**908**	**218**	908	218	908	218
459.GemsFDTD	24	1887	135	**1890**	**135**	1914	133	24	1890	135	**1887**	**135**	1873	136
465.tonto	24	1062	222	**1055**	**224**	1050	225	24	**981**	**241**	989	239	979	241
470.lbm	24	2687	123	2685	123	**2686**	**123**	12	1264	130	1265	130	**1265**	**130**
481.wrf	24	1038	258	**1039**	**258**	1043	257	24	1038	258	**1039**	**258**	1043	257
482.sphinx3	24	**2192**	**213**	2194	213	2191	213	24	2021	231	**2022**	**231**	2028	231

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
```

Platform Notes

```
 vm.zone_reclaim_mode = 1 in /etc/sysctl.conf file
 BIOS Settings:
 Power Management = Maximum Performance (Default = Active Power Controller)
```

General Notes

```
The Dell PowerEdge R910 and
the Bull NovaScale R480 F2 models are electronically equivalent.
The results have been measured on a Dell PowerEdge R910 model.
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static
```

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-fno-alias -opt-prefetch`

470.lbm: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-opt-malloc-options=3 -ansi-alias -auto-ilp32`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2`

C++ benchmarks:

444.namd: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-fno-alias -auto-ilp32`

447.dealII: `basepeak = yes`

450.soplex: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-opt-malloc-options=3`

453.povray: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch`

416.gamess: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `basepeak = yes`

437.leslie3d: `-xSSE4.2 -ipo -O3 -no-prec-div -static`

459.GemsFDTD: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -Ob0`

465.tonto: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll4 -auto -inline-calloc -opt-malloc-options=3`

Benchmarks using both Fortran and C:

Continued on next page

Peak Optimization Flags (Continued)

435.gromacs: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:28:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 July 2010.