SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Gateway GB2x280 F1 (Intel Xeon X5670, 2.93 GHz)

SPECfp®_rate2006 = 241

SPECfp_rate_base2006 = 232

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: May-2010
Hardware Availability: Sep-2010
Software Availability: Jan-2010

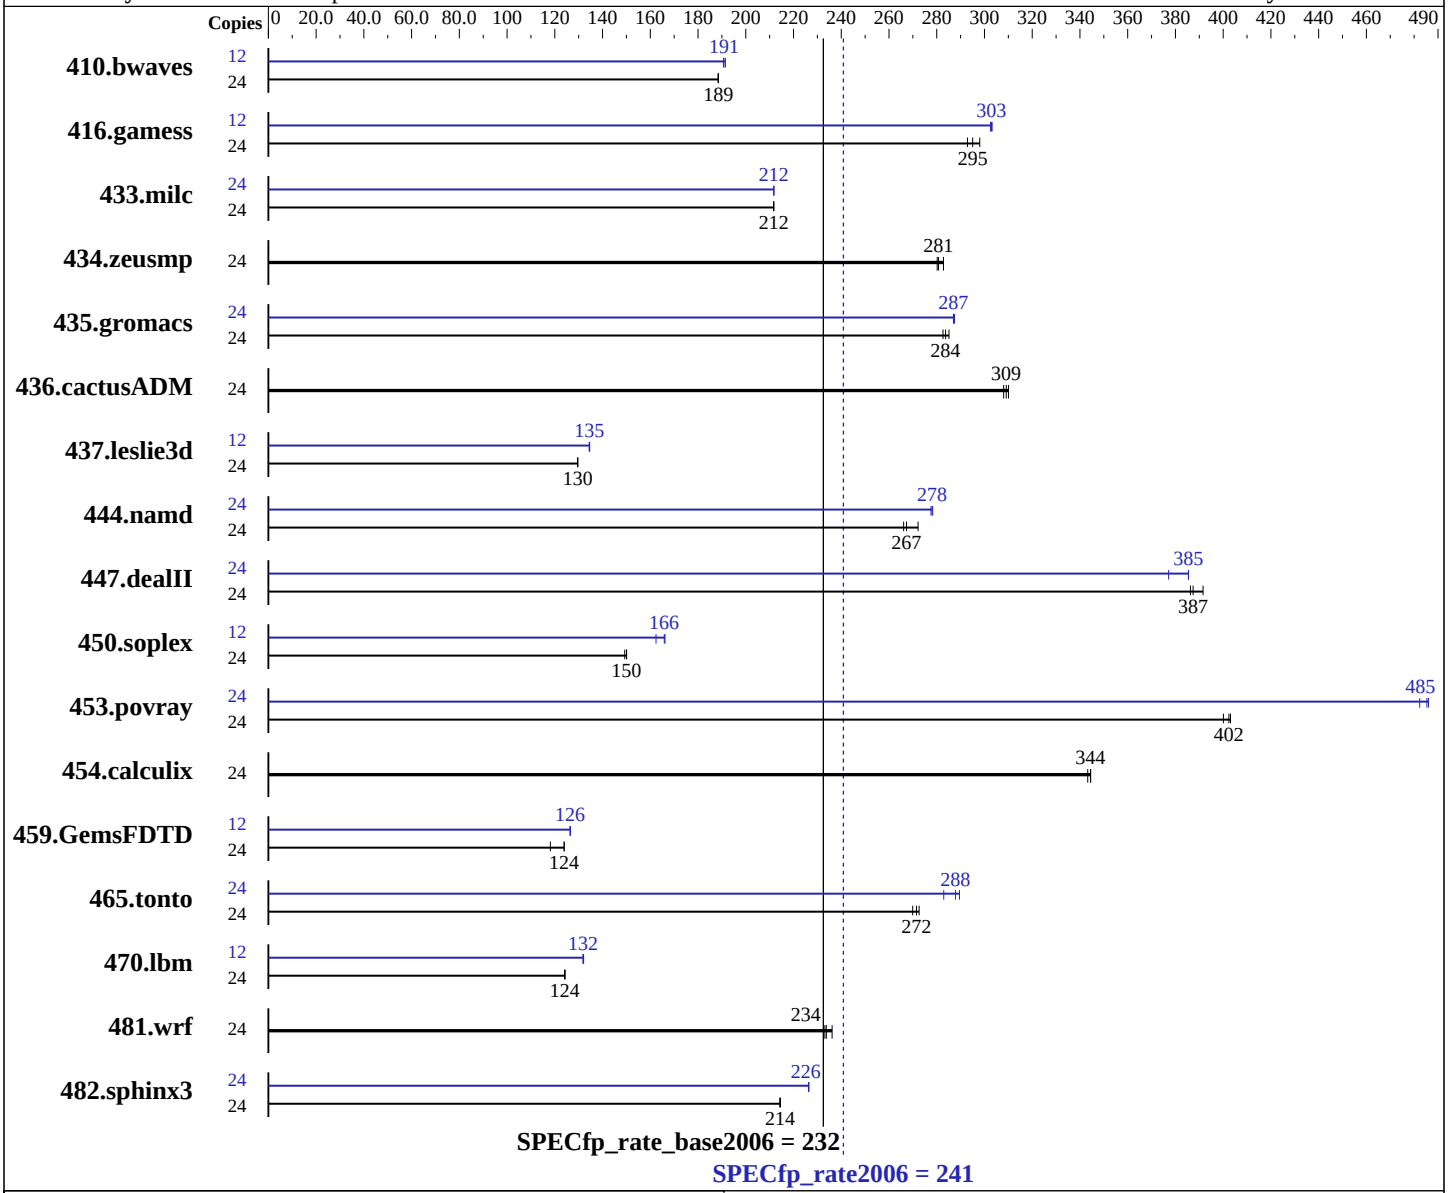

Hardware

CPU Name:	Intel Xeon X5670
CPU Characteristics:	Intel Turbo Boost Technology up to 3.33 GHz
CPU MHz:	2933
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) Kernel 2.6.27.19-5-default
Compiler:	Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Gateway GB2x280 F1 (Intel Xeon X5670, 2.93 GHz)

SPECfp_rate2006 = 241

SPECfp_rate_base2006 = 232

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: May-2010
Hardware Availability: Sep-2010
Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (6 x 8 GB DDR3-1333 RDIMM, ECC, CL9)
Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	**1730**	**189**	1730	189	1731	188	12	856	191	852	191	**854**	**191**
416.gamess	24	1577	298	1605	293	**1593**	**295**	12	**776**	**303**	775	303	777	303
433.milc	24	**1041**	**212**	1040	212	1041	212	24	1040	212	**1041**	**212**	1041	212
434.zeusmp	24	**778**	**281**	772	283	779	280	24	**778**	**281**	772	283	779	280
435.gromacs	24	601	285	**604**	**284**	606	283	24	597	287	596	287	**597**	**287**
436.cactusADM	24	925	310	**928**	**309**	931	308	24	925	310	**928**	**309**	931	308
437.leslie3d	24	1742	129	1740	130	**1741**	**130**	12	**838**	**135**	838	135	839	134
444.namd	24	707	272	723	266	**720**	**267**	24	693	278	**692**	**278**	692	278
447.dealII	24	701	392	**709**	**387**	711	386	24	728	377	**712**	**385**	712	385
450.soplex	24	1341	149	**1334**	**150**	1334	150	12	616	162	602	166	**603**	**166**
453.povray	24	**317**	**402**	317	403	319	400	24	**263**	**485**	265	482	263	486
454.calculix	24	**575**	**344**	575	344	577	343	24	**575**	**344**	575	344	577	343
459.GemsFDTD	24	2155	118	2055	124	**2055**	**124**	12	1007	126	**1007**	**126**	1006	127
465.tonto	24	875	270	866	273	**870**	**272**	24	816	290	**820**	**288**	835	283
470.lbm	24	2655	124	**2655**	**124**	2656	124	12	1248	132	**1250**	**132**	1251	132
481.wrf	24	1135	236	**1147**	**234**	1150	233	24	1135	236	**1147**	**234**	1150	233
482.sphinx3	24	2183	214	**2182**	**214**	2181	215	24	2065	226	2067	226	**2067**	**226**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
```

Platform Notes

```
Fan speed set to full Speed (ie. Enterprise Blade mode) with
Smart Blade Console through CMM (Chassis Management Module)
```

General Notes

```
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

The Acer AB2x280 F1, and Gateway GB2x280 F1 are electronically equivalent.
This result was measured on Gateway GB2x280 F1.
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static
```

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Continued on next page

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 10:33:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 August 2010.