SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S2, Intel Xeon E5507, 2.26 GHz

SPECfp®_rate2006 = 64.1

SPECfp_rate_base2006 = 62.2

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Aug-2010
Hardware Availability: Jun-2010
Software Availability: Jan-2010

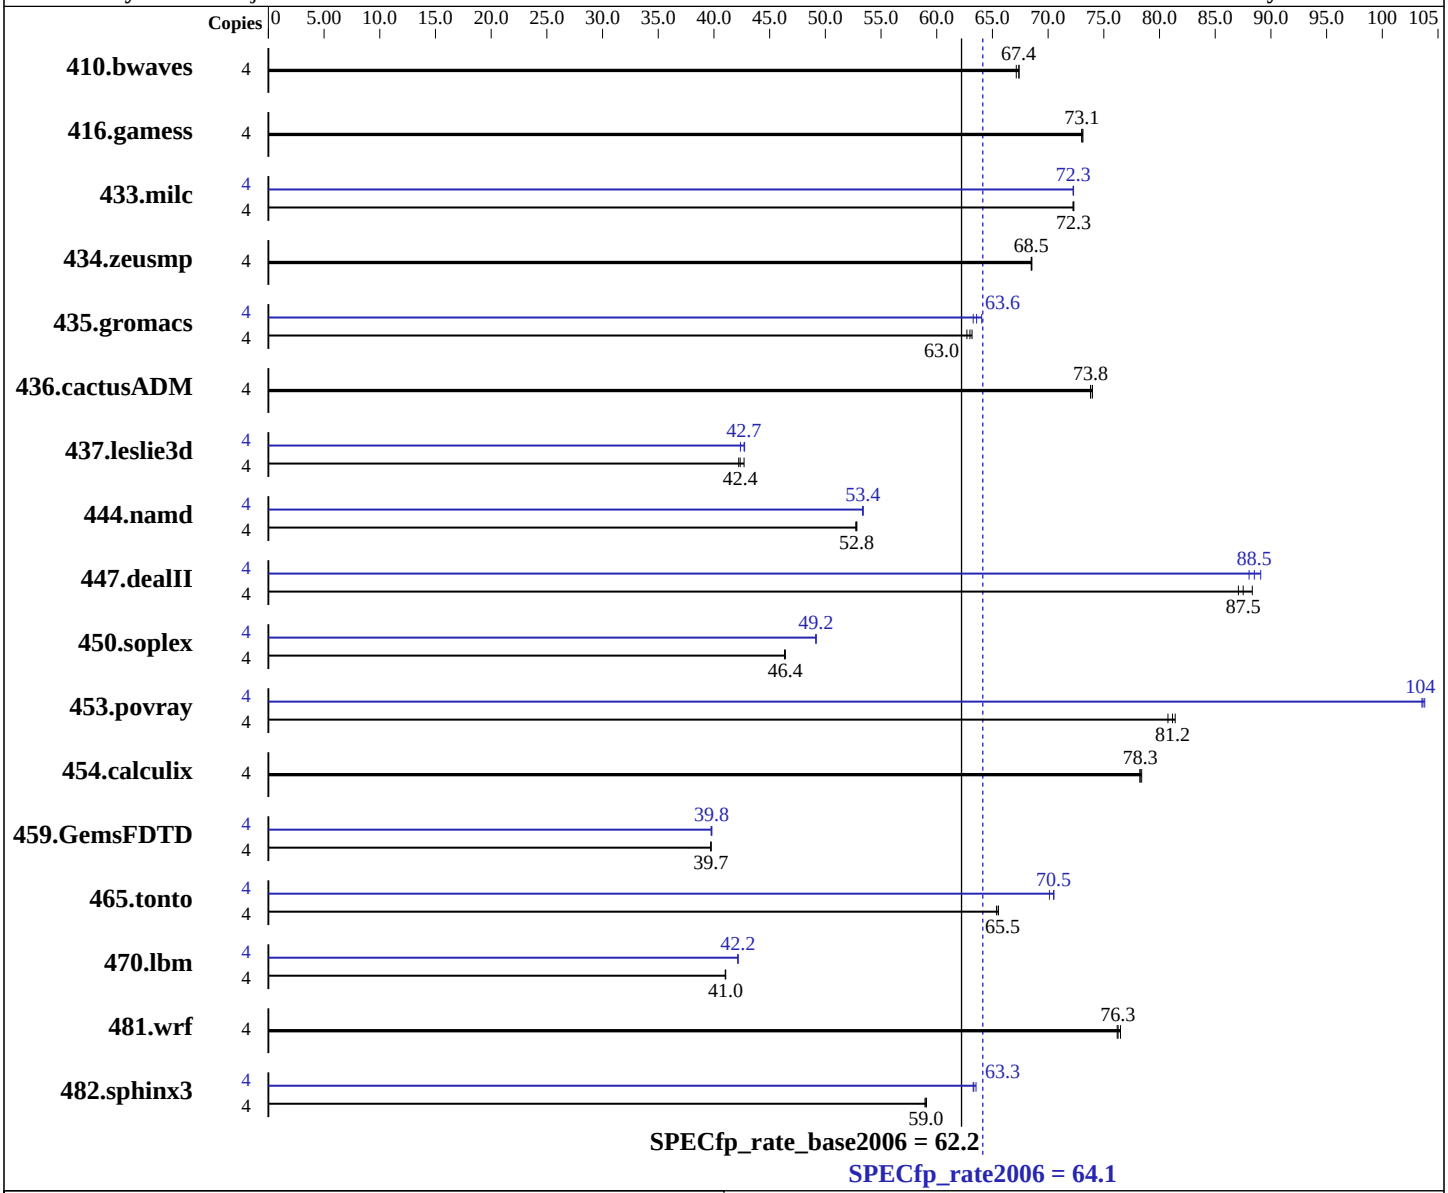

Hardware

CPU Name:	Intel Xeon E5507
CPU Characteristics:	
CPU MHz:	2267
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler:	Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S2, Intel Xeon E5507, 2.26 GHz

SPECfp_rate2006 = 64.1

SPECfp_rate_base2006 = 62.2

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Aug-2010
Hardware Availability: Jun-2010
Software Availability: Jan-2010

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)
Disk Subsystem: 1 x SATA, 160 GB, 5400 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	810	67.1	**807**	**67.4**	807	67.4	4	810	67.1	**807**	**67.4**	807	67.4
416.gamess	4	1071	73.1	**1072**	**73.1**	1073	73.0	4	1071	73.1	**1072**	**73.1**	1073	73.0
433.milc	4	508	72.2	508	72.3	**508**	**72.3**	4	**508**	**72.3**	508	72.3	508	72.2
434.zeusmp	4	532	68.5	531	68.5	**531**	**68.5**	4	532	68.5	531	68.5	**531**	**68.5**
435.gromacs	4	452	63.2	455	62.7	**453**	**63.0**	4	446	64.0	**449**	**63.6**	451	63.3
436.cactusADM	4	648	73.8	646	74.0	**648**	**73.8**	4	648	73.8	646	74.0	**648**	**73.8**
437.leslie3d	4	**888**	**42.4**	880	42.7	891	42.2	4	**880**	**42.7**	880	42.7	887	42.4
444.namd	4	**608**	**52.8**	608	52.7	607	52.8	4	601	53.4	602	53.3	**601**	**53.4**
447.dealII	4	518	88.3	525	87.1	**523**	**87.5**	4	520	88.0	514	89.1	**517**	**88.5**
450.soplex	4	720	46.3	719	46.4	**719**	**46.4**	4	678	49.2	**679**	**49.2**	679	49.1
453.povray	4	261	81.4	**262**	**81.2**	264	80.8	4	205	104	**205**	**104**	205	104
454.calculix	4	**422**	**78.3**	422	78.2	421	78.4	4	**422**	**78.3**	422	78.2	421	78.4
459.GemsFDTD	4	1068	39.7	1069	39.7	**1068**	**39.7**	4	1066	39.8	**1067**	**39.8**	1068	39.7
465.tonto	4	**601**	**65.5**	601	65.5	602	65.4	4	561	70.1	558	70.5	**558**	**70.5**
470.lbm	4	1340	41.0	**1339**	**41.0**	1339	41.1	4	1304	42.1	**1304**	**42.2**	1304	42.2
481.wrf	4	**586**	**76.3**	584	76.5	586	76.2	4	**586**	**76.3**	584	76.5	586	76.2
482.sphinx3	4	1320	59.1	**1321**	**59.0**	1323	58.9	4	1227	63.5	1232	63.3	**1231**	**63.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
```

Platform Notes

```
The system automatically configures the memory to run at 800 MHz.
```

General Notes

```
For information about Fujitsu please visit: http://www.fujitsu.com
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static
```

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-fno-alias -opt-prefetch`

470.lbm: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-opt-malloc-options=3 -ansi-alias -auto-ilp32`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2`

C++ benchmarks:

444.namd: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-fno-alias -auto-ilp32`

447.dealII: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -ansi-alias -scalar-rep-`

450.soplex: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-opt-malloc-options=3`

453.povray: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `basepeak = yes`

416.gamess: `basepeak = yes`

434.zeusmp: `basepeak = yes`

437.leslie3d: `-xSSE4.2 -ipo -O3 -no-prec-div -static`

459.GemsFDTD: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -Ob0`

465.tonto: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll4 -auto -inline-calloc -opt-malloc-options=3`

Benchmarks using both Fortran and C:

Continued on next page

Peak Optimization Flags (Continued)

435.gromacs: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.02.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.02.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 12:26:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 August 2010.