



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C210 M2 (Intel Xeon E5640, 2.67 GHz)

SPECfp®_rate2006 = 176

CPU2006 license: 9019


Test date: Sep-2010

Test sponsor: Cisco Systems

Hardware Availability: Apr-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

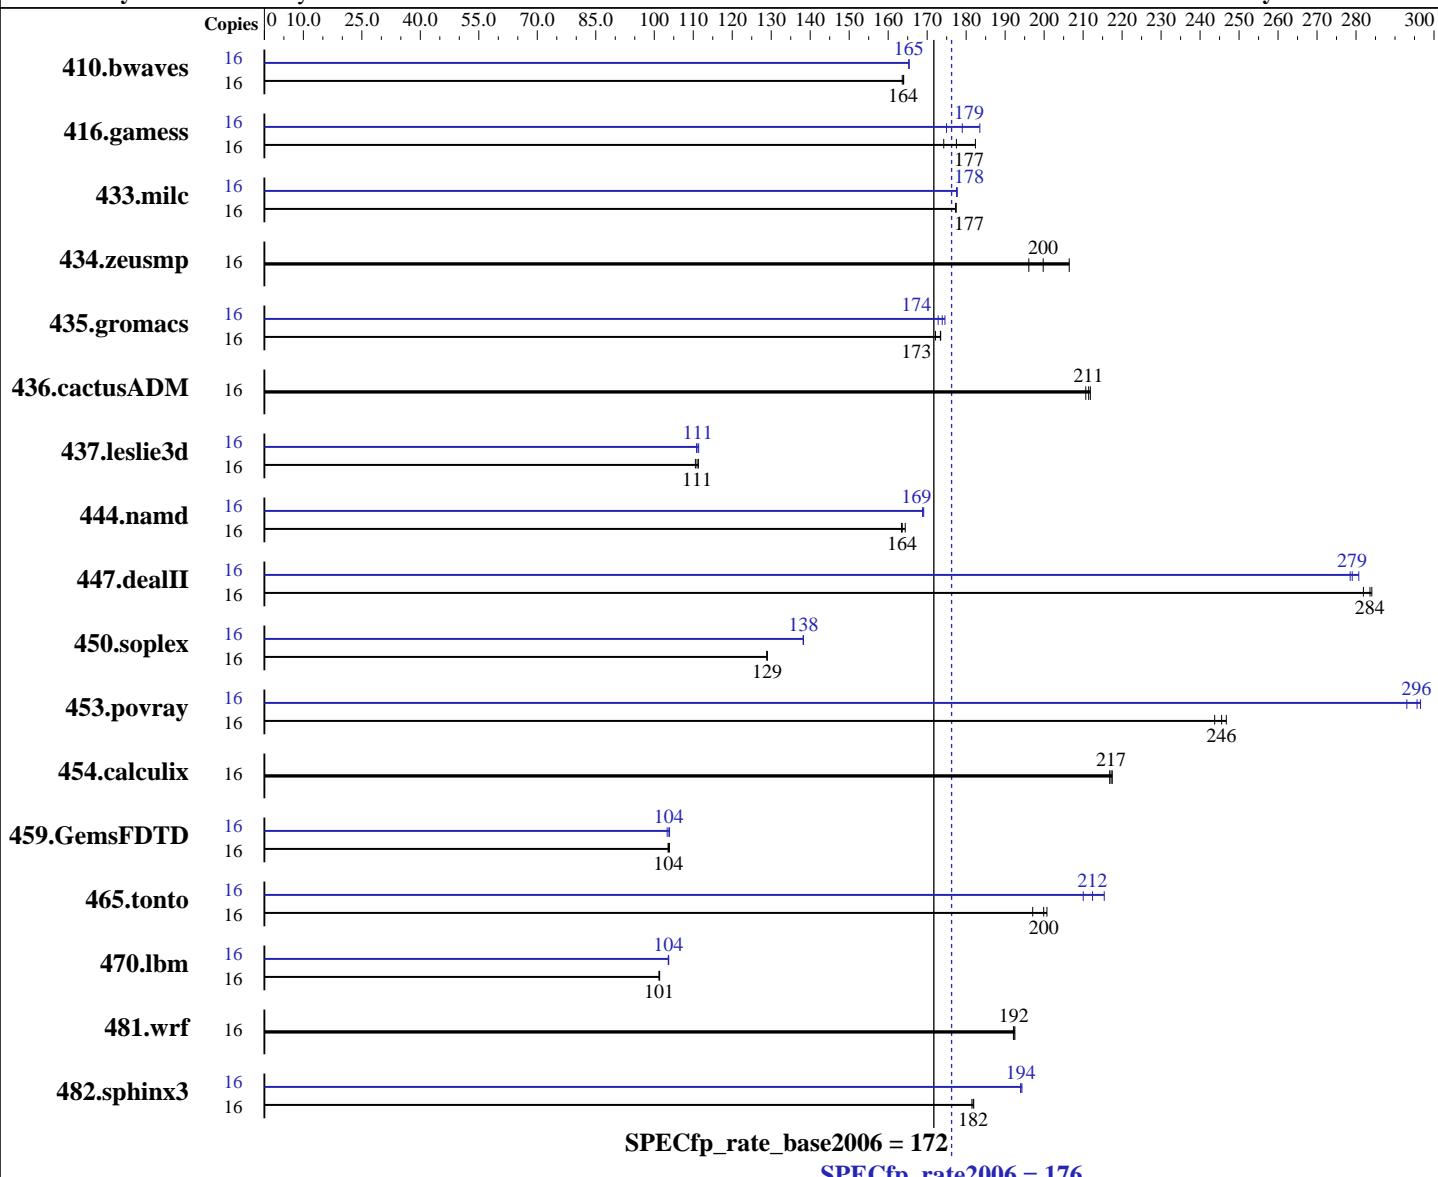

Hardware

CPU Name: Intel Xeon E5640
CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz
CPU MHz: 2667
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SuSe Linux Enterprise Server 11 (x86_64), Kernel 2.6.27-15-2-default, RC4
Compiler: Intel C++ and Fortran Compiler 11.1 IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064 l_cprof_p_11.1.064
Auto Parallel: No
File System: ext3
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C210 M2 (Intel Xeon E5640, 2.67 GHz)

SPECfp_rate2006 = 176

CPU2006 license: 9019

Test date: Sep-2010

Test sponsor: Cisco Systems

Hardware Availability: Apr-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4GB DDR3-1333 MHz DR RDIMM, CL9, ECC)
 Disk Subsystem: 146 GB SAS, 10K RPM
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1326	164	<u>1327</u>	<u>164</u>	1329	164	16	<u>1315</u>	<u>165</u>	1315	165	1316	165
416.gamess	16	1718	182	1798	174	<u>1765</u>	<u>177</u>	16	1707	184	1790	175	<u>1750</u>	<u>179</u>
433.milc	16	828	177	828	177	<u>828</u>	<u>177</u>	16	827	178	<u>827</u>	<u>178</u>	827	178
434.zeusmp	16	<u>729</u>	<u>200</u>	705	206	743	196	16	<u>729</u>	<u>200</u>	705	206	743	196
435.gromacs	16	664	172	<u>659</u>	<u>173</u>	659	173	16	<u>657</u>	<u>174</u>	654	175	661	173
436.cactusADM	16	903	212	908	211	<u>904</u>	<u>211</u>	16	903	212	908	211	<u>904</u>	<u>211</u>
437.leslie3d	16	1351	111	1360	111	<u>1355</u>	<u>111</u>	16	1357	111	1350	111	<u>1352</u>	<u>111</u>
444.namd	16	<u>784</u>	<u>164</u>	785	163	781	164	16	<u>760</u>	<u>169</u>	759	169	760	169
447.dealII	16	<u>645</u>	<u>284</u>	644	284	649	282	16	<u>656</u>	<u>279</u>	652	281	<u>657</u>	<u>279</u>
450.soplex	16	<u>1035</u>	<u>129</u>	1035	129	1036	129	16	<u>965</u>	<u>138</u>	966	138	<u>965</u>	<u>138</u>
453.povray	16	345	247	<u>347</u>	<u>246</u>	349	244	16	290	293	287	297	<u>288</u>	<u>296</u>
454.calculix	16	607	217	<u>608</u>	<u>217</u>	609	217	16	607	217	<u>608</u>	<u>217</u>	609	217
459.GemsFDTD	16	<u>1638</u>	<u>104</u>	1639	104	1634	104	16	1643	103	<u>1636</u>	<u>104</u>	1633	104
465.tonto	16	<u>788</u>	<u>200</u>	784	201	799	197	16	731	215	750	210	<u>741</u>	<u>212</u>
470.lbm	16	2168	101	<u>2170</u>	<u>101</u>	2172	101	16	2120	104	<u>2121</u>	<u>104</u>	2122	104
481.wrf	16	930	192	<u>930</u>	<u>192</u>	928	193	16	<u>930</u>	<u>192</u>	<u>930</u>	<u>192</u>	928	193
482.sphinx3	16	1714	182	1718	181	<u>1715</u>	<u>182</u>	16	<u>1605</u>	<u>194</u>	1608	194	<u>1607</u>	<u>194</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 numactl was used to bind copies to the cores

Operating System Notes

ulimit -s unlimited was used to set the stacksize to unlimited prior to run

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C210 M2 (Intel Xeon E5640, 2.67 GHz)

SPECfp_rate2006 = 176

CPU2006 license: 9019

Test date: Sep-2010

Test sponsor: Cisco Systems

Hardware Availability: Apr-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C210 M2 (Intel Xeon E5640, 2.67 GHz)

SPECfp_rate2006 = 176

CPU2006 license: 9019

Test date: Sep-2010

Test sponsor: Cisco Systems

Hardware Availability: Apr-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4_2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -opt-prefetch

470.lbm: -xSSE4_2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -ansi-alias -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C210 M2 (Intel Xeon E5640, 2.67 GHz)

SPECfp_rate2006 = 176

CPU2006 license: 9019

Test date: Sep-2010

Test sponsor: Cisco Systems

Hardware Availability: Apr-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll12

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll14 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C210 M2 (Intel Xeon E5640, 2.67 GHz)

SPECfp_rate2006 = 176

SPECfp_rate_base2006 = 172

CPU2006 license: 9019

Test date: Sep-2010

Test sponsor: Cisco Systems

Hardware Availability: Apr-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revG.20100929.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revG.20100929.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 14:36:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 October 2010.